




Open Frame LCD

Specifications


Model Name	WOP1210M7
Viewable Size image	12.1"
Active Display Area (mm)	245.76(H)x184.32(V)
Pixel Pitch(mm)	0.240(H)x0.240(V)(typ.)
Number of Pixels	1024x768
Contrast Ratio	700:1(typ.)
Display Color	262,144 colors
Brightness(cd/m2)	450(typ.)
Viewing Angle(CR>=10)	-80~80(H); -80~80(V)(typ.)
Synchronization Range (Horizontal / Vertical)	31.5~60KHz/60~75Hz
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	20W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, Capacitive, SAW,IR



Remarks: WOP1210M7 series= VGA input only
WOP1210M7AV series= VGA+Video Input

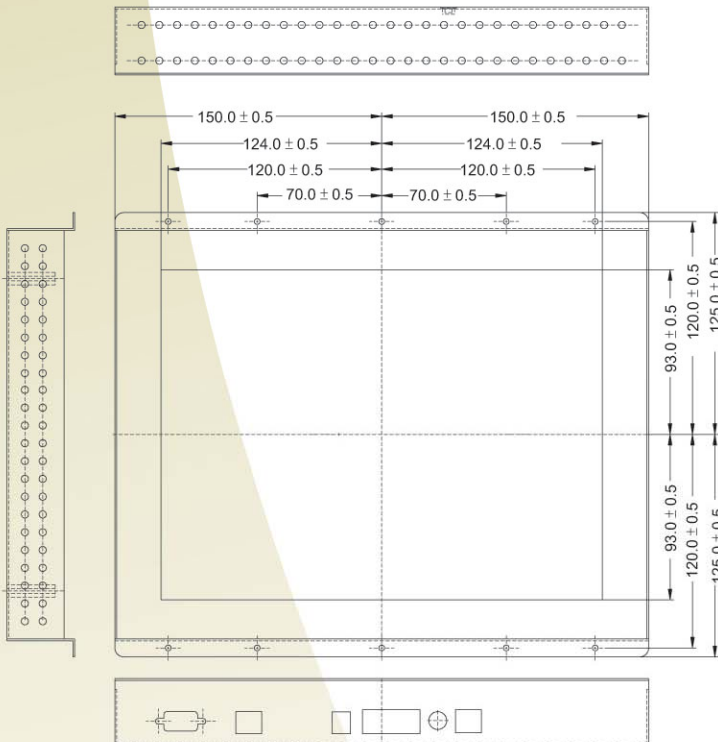

MECHANICAL DRAWING

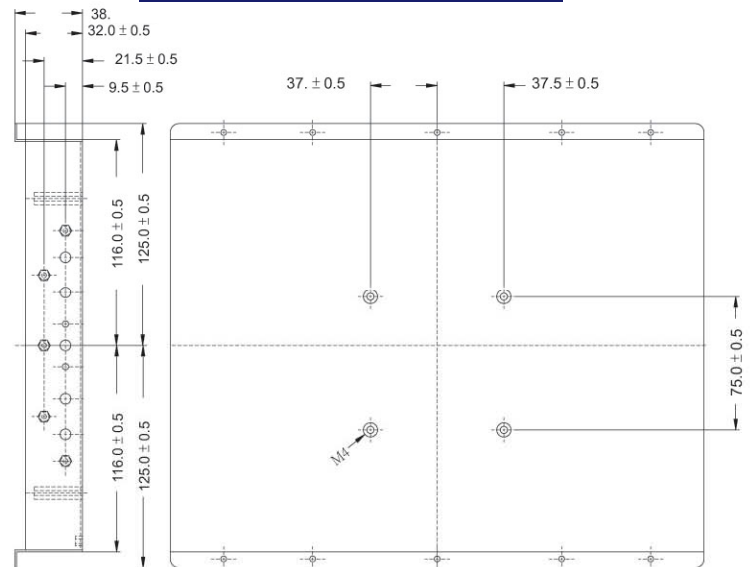

UNIT:mm

*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@itechlcd.com • WEB: www.iTechLCD.com