



# Open Frame LCD

## Specifications


Model Name	WOP1500A1
Viewable Size image	15"
Active Display Area (mm)	304.128(H) x 228.096(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	700:1(typ.)
Display Color	16.2M(6bit+FRC)
Brightness(cd/m2)	550(typ.)
Viewing Angle(CR>=10)	-80~80(H);-70~70(V)
Synchronization Range (Horizontal / Vertical )	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	20W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive
Need Special Housing	SAW, IR
Optional Protection glass (reflection)	Optional
Operation Temperature	0°C~50°C




**Remarks:** WOP1500A1 series= VGA input only  
 WOP1500A1AV series= VGA+Video Input

[MECHANICAL DRAWING](#)



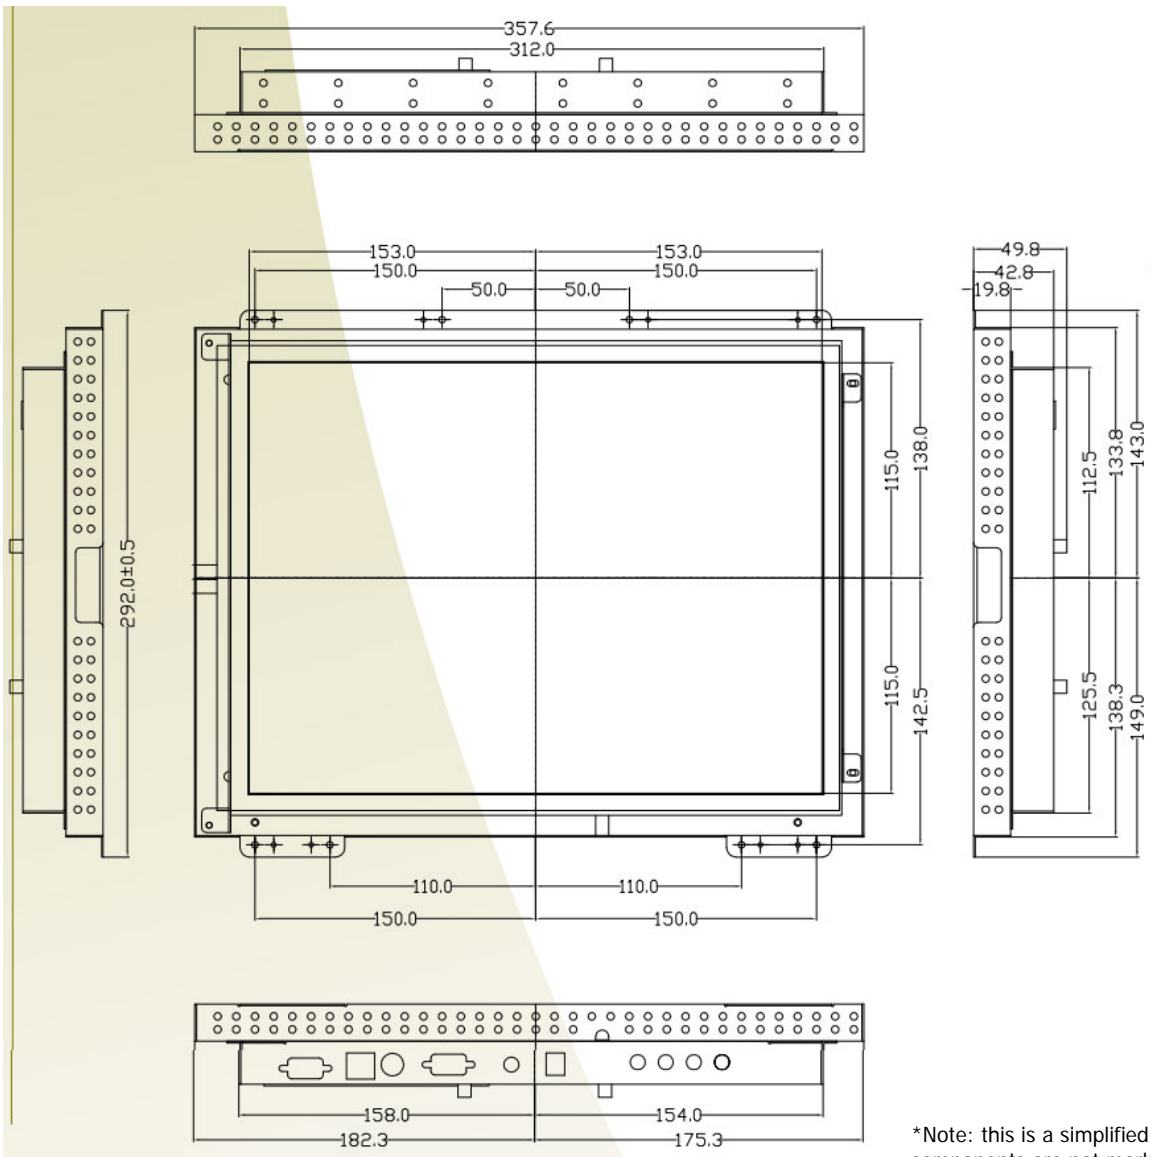

\*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

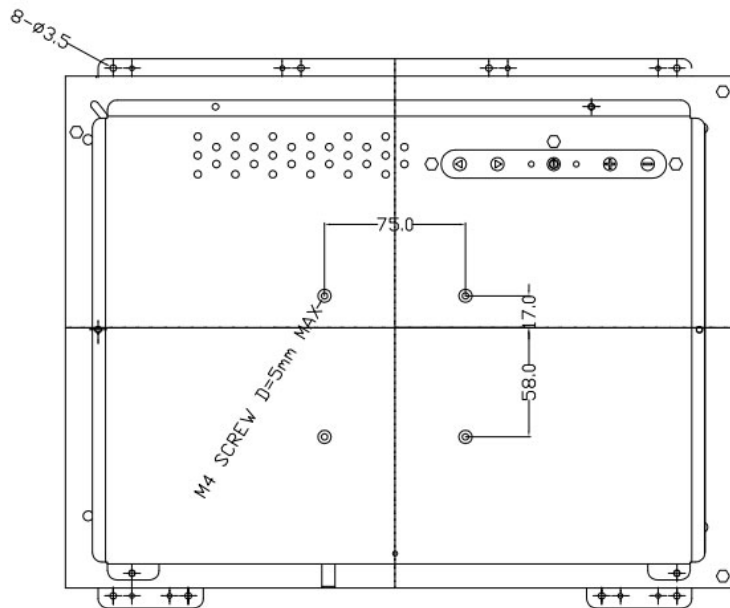

UNIT:mm

