





Open Frame LCD

Specifications


Model Name	WOP1500A2
Viewable Size image	15"
Active Display Area (mm)	304.128(H) x 228.096(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	700:1(typ.)
Display Color	16.2M(6bit+FRC)
Brightness(cd/m2)	350(typ.)
Viewing Angle(CR>=10)	-80~80(H);-80~60(V)
Response Time	8ms
Synchronization Range (Horizontal / Vertical)	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	15 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW, IR



Remarks: WOP1500A2 series= VGA input only
 WOP1500A2AV series= VGA+Video Input

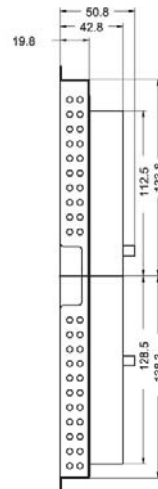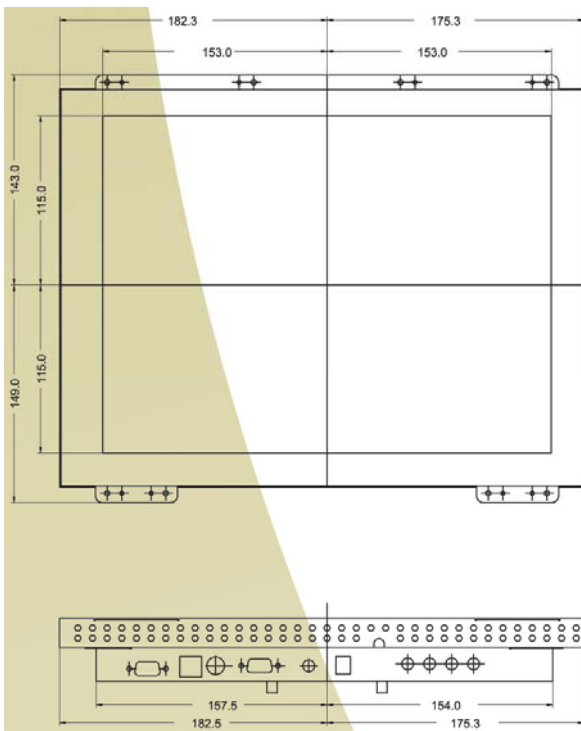

MECHANICAL DRAWING

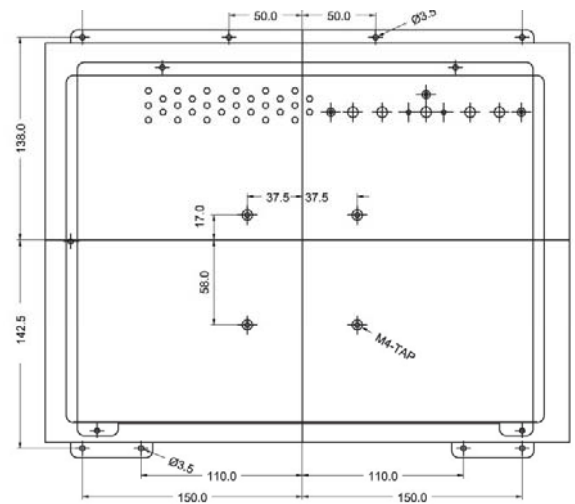

UNIT:mm

*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

