



Open Frame LCD


Specifications

Model Name	WOP1500M5HB
Viewable Size image	15"
Active Display Area (mm)	304.1(H)x228.1(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	700:1(typ.)
Display Color	16.7M(8bits/color)
Brightness(cd/m2)	800(typ.)
Viewing Angle(CR>=10)	-80~80(H); -70~70(V)
Synchronization Range (Horizontal / Vertical)	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	35 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW, IR



Remarks: WOP1500M5HB series= VGA input only
WOP1500M5HBAV series= VGA+Video Input

MECHANICAL DRAWING

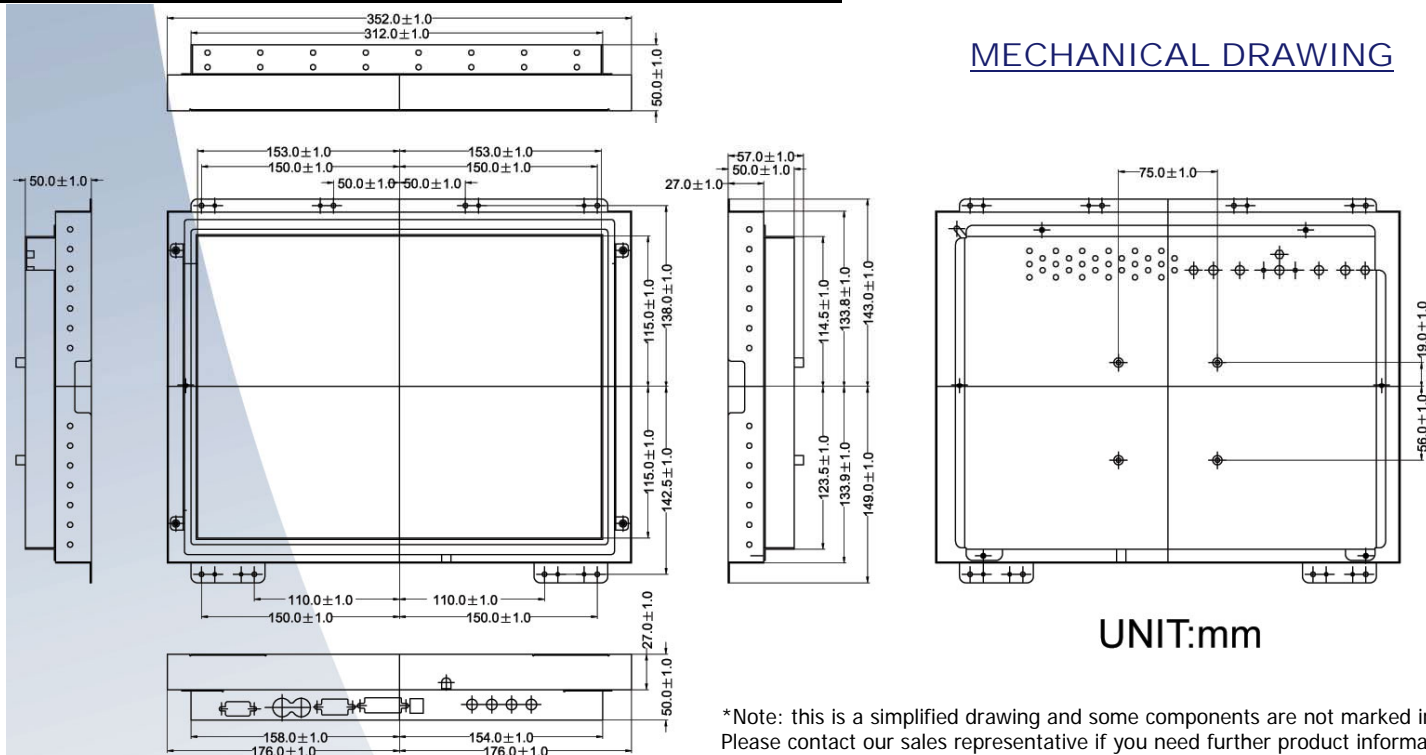

*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.