

Sunlight Readable Open Frame LCD



Specifications	
Model Name	WOPH1700A1
Viewable Size image	17"
Active Display Area (mm)	337.92(H)x270.34(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)
Number of Pixels	1280x1024
Contrast Ratio	1000:1(typ.)
Color Configuration	16.7M (8bits/color)
Brightness(cd/m2)	550 (typ.)
Viewing Angle(CR>=10)	-85~85(H);-80~80(V)
Synchronization Range (Horizontal / Vertical)	31.5~80.0KHz/60~75Hz
Recommended Resolution	1280 x1024@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12 V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	32 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW



Remarks: WOPH1700A1 = VGA input only
WOPH1700A1AV = VGA+Video Input



MECHANICAL DRAWING

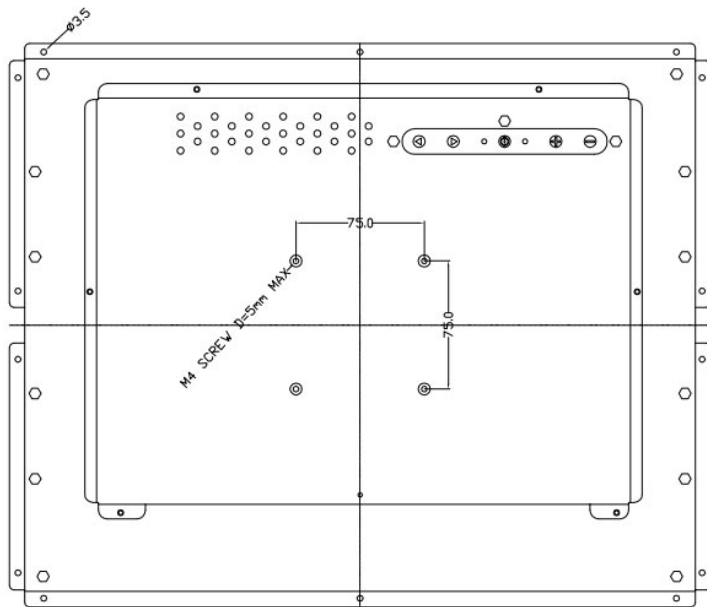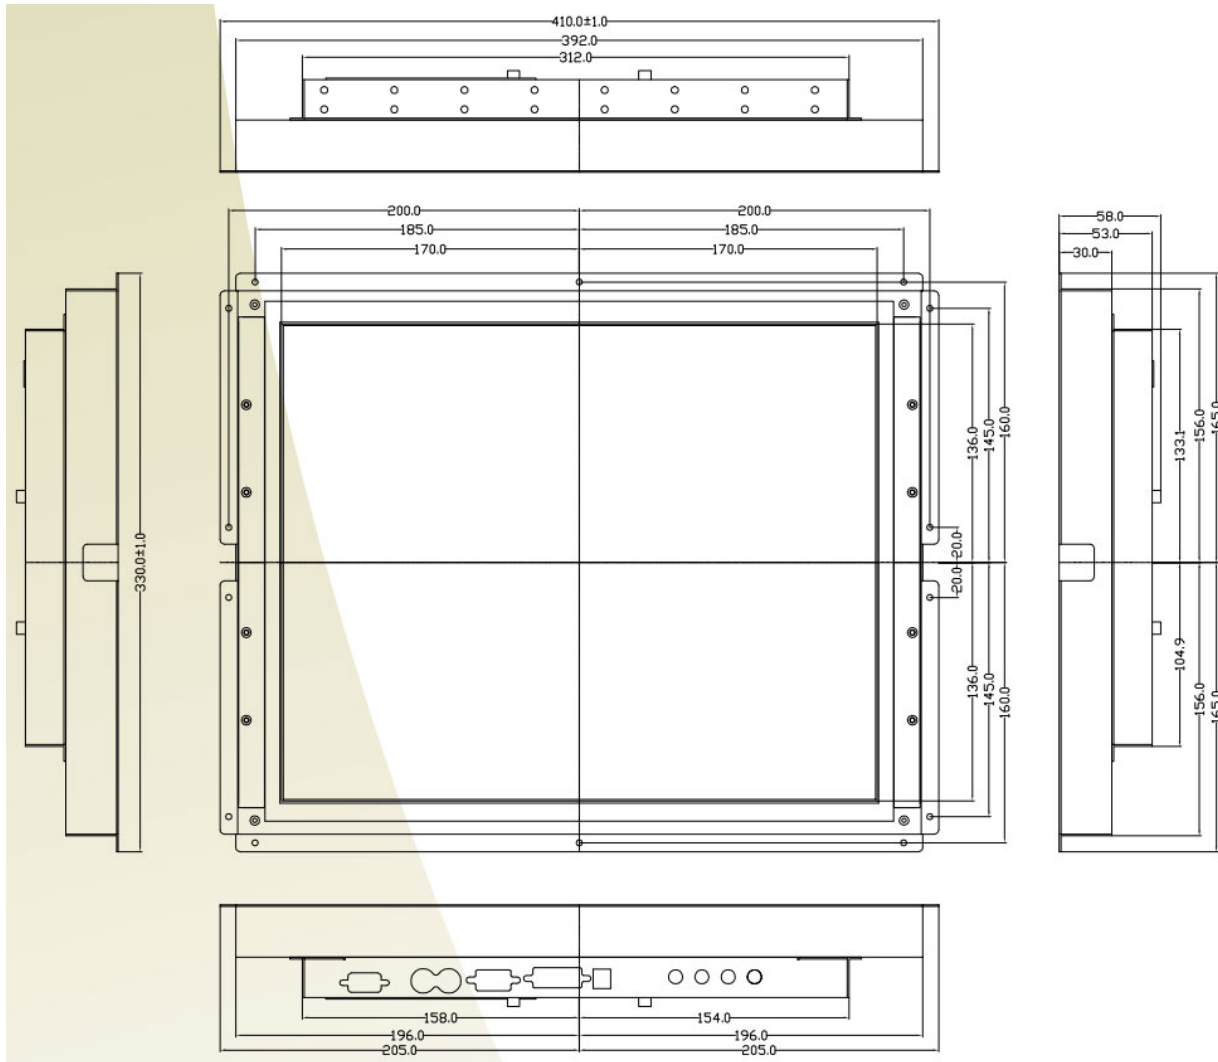

UNIT:mm

Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

