




Open Frame LCD

Specifications


| | |
|--|---|
| Model Name | WOPW3200A3 |
| Viewable Size image | 32"(16:9) |
| Active Display Area (mm) | 698.4 (H) x 392.85 (V) |
| Pixel Pitch(mm) | 0.3637(H) x 0.3637(V) |
| Number of Pixels | 1920x1080 |
| Contrast Ratio | 3000:1 (typ.) |
| Display Color | 16.7M(8bit/color) |
| Brightness(cd/m2) | 350(typ.) |
| Viewing Angle(CR>=10) | -89~89(H); -89~89(V) |
| Synchronization Range (Horizontal / Vertical) | 47~63KHz / 60~73Hz |
| Recommended Resolution | 1920x1080@60Hz |
| Signal Connector | 15 pin D-sub |
| Power Source | 24V DC in,with External AC to DC Adapter(100~240V AC) |
| Power Consumption | 75w typical,normal,operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | Yes |
| Optional Touch Screen | SAW |



Remarks: WOPW3200A3 series= VGA input only
 WOPW3200A3AV series= VGA+Video Input

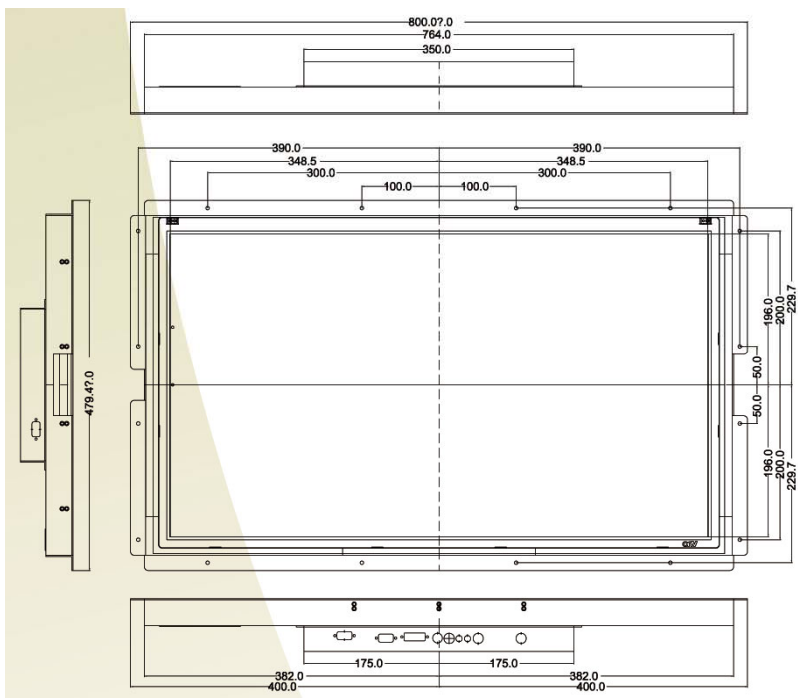

MECHANICAL DRAWING

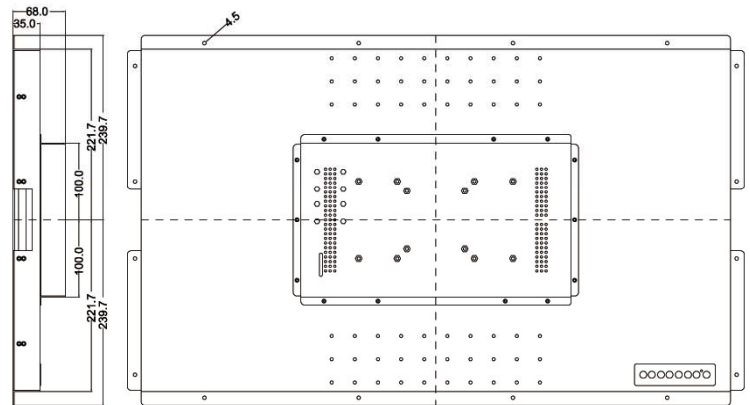

UNIT:mm

*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

