

# FULL IP5 PANEL PC

10.4" Rugged Full IP65 Panel PC, 1024x768, 350nits  
NXP A9 i.MX6 Dual Core 1GHz with Ultra-low power  
consumption and PCAP Multi-Touch

Model: WPC1040IP-N-FPCT



## FEATURES:

- 10.4" 1024 x 768 with PCAP touchscreen
- NXP A9 i.MX6 Dual Core 1GHz (Optional Quad Core)
- Fanless cooling system and Ultralow power consumption
- Onboard LPDDR3 1GB
- Onboard 16GB eMMC Flash
- Full IP65
- 1 x LAN, 1 x RS232, 1 x USB, 1 x USB OTG, 1 x Console, 1 x Micro SD




## SPECIFICATIONS

DISPLAY			
Resolution	1024x768	Size	10.4 inches
Contrast Ratio	1000:1	Panel Brightness	350 nits
View Angles	88,88,88,88		
Touch / Glass	Projected Capacitive Multi Touch Screen Protection Glass (Optional)		
SYSTEM SPECIFICATIONS			
Processor	NXP i.MX6 Dual Core, 1.0GHz	Memory	1GB 2GB (Optional)
Storage	Onboard 16GB eMMC Onboard 32GB eMMC (Optional)	Operating System	Linux Ubuntu 18.04 (Optional) Android 6.0 (Optional) Debian 7.0 (Optional) Linux 4.1.15 QT 5.5 (Optional)
ENVIRONMENT			
Operating Humidity	10% to 95% RH	Operating Temperature	-15°C ~ 55°C
Storage Temperature	-30°C ~ 60°C	Shock	40g for 11ms
Vibration	1.48/1.90/2.24 g rms for XYZ/ 5500Hz	IP rating	Full IP65
CERTIFICATION			
Certification	Compliant with MILSTD810F/ G for vibration / shock, CE, FCC		
IO PORTS			
USB Port	1 X USB 2.0 (M12 type) 1 x USB OTG (On side)	Serial Port	1 x RS232 (M12 type)(Optional 422/485) 1 x Console port (Linux Use) (On Side)
SD Card Slot	1 x Micro SD Card Slot		
LAN	1 x LAN10/100/1000 (M12 type)		
POWER			
Power Rating	12V DC (M12 type)		
ACCESSORIES			
Quick Start Guide (Hardcopy) Driver CD & User Manual M12 Power Cable M12 Serial Interface Cable M12 USB/ LAN Cable I/O Protective Cap x 3			

*\*Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS UNIT: MM

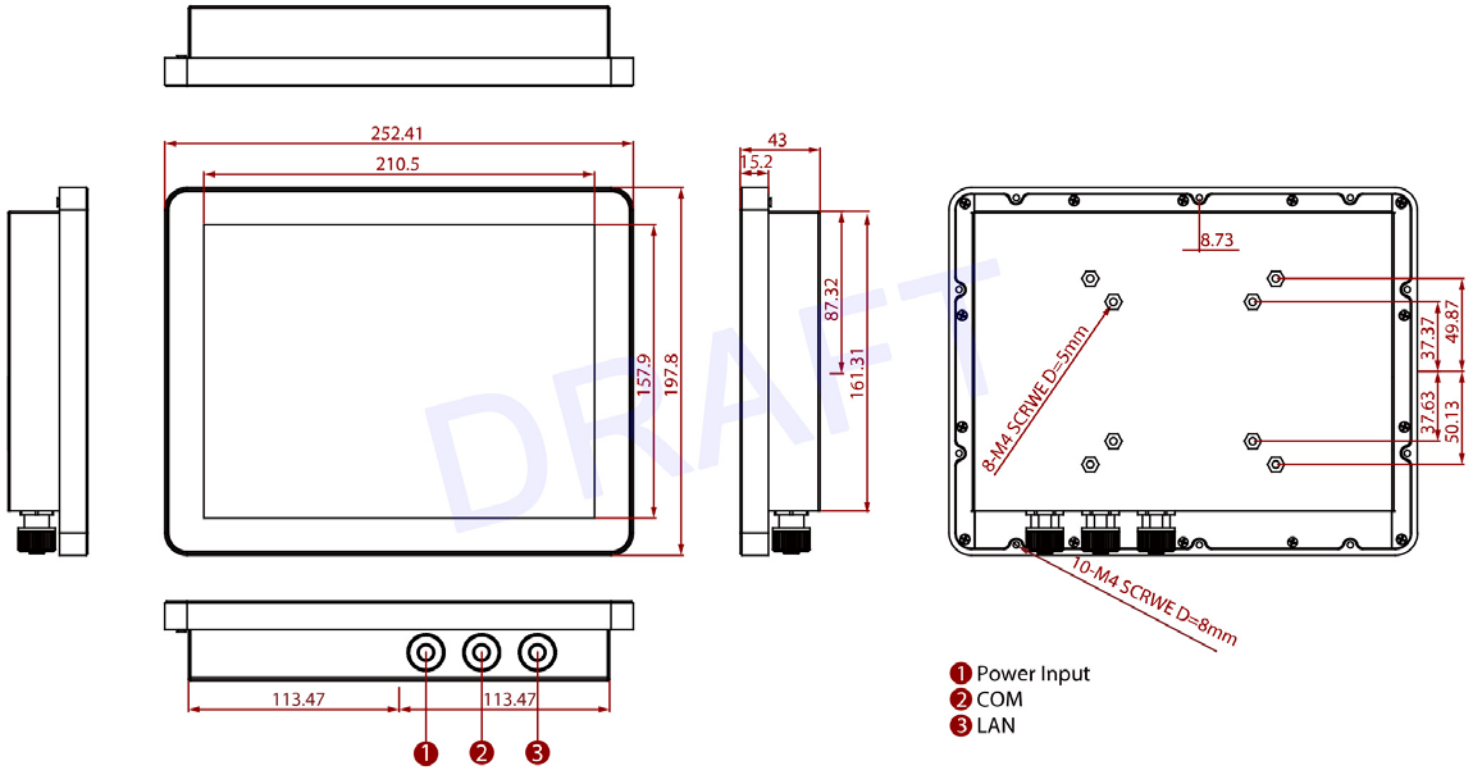

*This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.*