



# Model: WPM-MAR-1500M2

## 15" Rugged Transflective SunLight Readable Marine LCD

Dimming 0~100%	Sunlight Readable	PIP	IP65 Proof	8- to36V DC input	Anti- Corrosion (Option)	OSD from panel	AR Safety Glass (option)	Touch Screen
-------------------	----------------------	-----	------------	----------------------	--------------------------------	-------------------	--------------------------------	-----------------

### Features:

<b>Hyper Dimming:</b>	Dimming knob control backlight brightness from nearly 0% to 100%
<b>High Brightness LCD Panel</b>	High brightness TFT-LCD panel enhance the best visibility
<b>Ruggedized IP65 Proof:</b>	Panel (flush) mount IP65 aluminum housing with powder coating design (IP54 rear)
<b>Wide Voltage Range Input :</b>	8 to 36V DC to DC power input acceptable(AC power for option)
<b>Touchscreen :</b>	High quality touchscreen / AR protection glass for option
<b>Multiscan Function:</b>	PIP(picture in picture) function and multi-video inputs
<b>IP65 OSD front panel Design:</b>	Ease of use front panel OSD control
<b>Anti-shock and Vibration:</b>	Enhanced shock and vibration resistance

### TFT Characteristics

Pixel Number	1024x768
Pixel Pitch(R&B)	0.297 (H) x 0.297 (V)
Contrast Ratio	600 : 1(typ.)
Light Intensity	800 (typ.)
Viewable Angle	-75~75 (H); -60~50 (V)
Active Display Area	304.1 (H) x 228.1 (V)
Max Colors	16.7M (8bits/color)

### Certification and Approvals

Certification	CE, FCC
Approvals	DNV Type Approval (Pending)

### Input Signals

RGB Signal	D-SUB 15P connector(female)
Composite Video	RCA phono plug
S-Video Signal	S-Video (SVHS) plug
DVI-D Signal	DVI-D input 24pin connector
DC Power Signal	Screw terminal block
AC Power Signal (Optional)	Std IEC Inlet
Touch Screen (Optional)	D-SUB 9P connector (female)
Remote via RS-232 (Optional)	D-SUB 9P connector (female)

### User Controls

- Power On/Off via front button
- VR Brightness Knob Control
- On Screen Display control(OSD)
- OSD Remote Control via RS-232
- Power Mode Status LED

### Power Specification

Power Supply Options	8 to 36 V DC to DC power supply with terminal block. 90 to 265 V AC (optional)
Power Consumption	40 W typical, normal operation

### Environmental Considerations

Operating Temperature	-10 deg.C to 55 deg.C
Humidity	5% to 95% (non condensing)
Anti-Vibration	5Hz~500Hz / 1Grms/3 Axis
Anti-Shock	15G, 11ms duration

### Available Options

Mechanical Options	Panel (Flush) mount with IP65 (SAW touch for IP54)
Touch Screen Options	SAW, 5 Wire Resistive
AR Safety Glass Option	3mm Anti-reflective protection glass
	Yes




i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@i-techcompany.com](mailto:info@i-techcompany.com) • WEB: [www.i-techcompany.com](http://www.i-techcompany.com)




# Model: WPM-MAR-1500M2


## 15" Rugged Transflective SunLight Readable Marine LCD

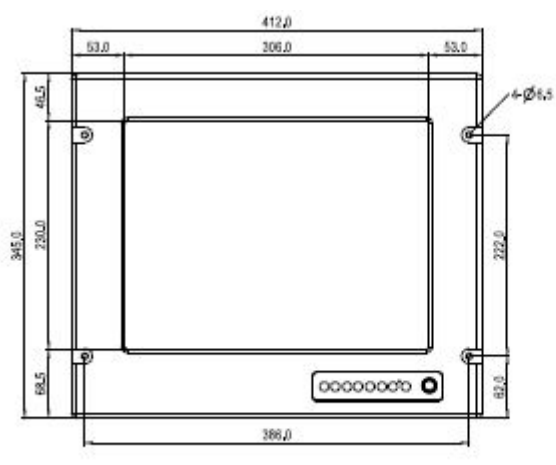



Front View

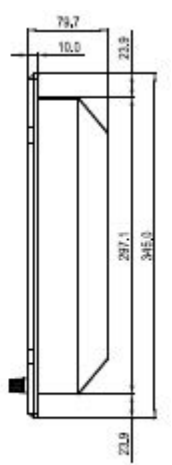


Side View

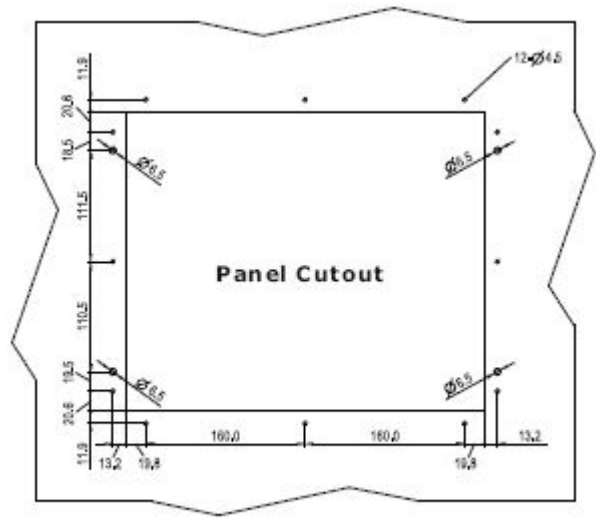

All Dimensions are  $\pm 0.5$  mm

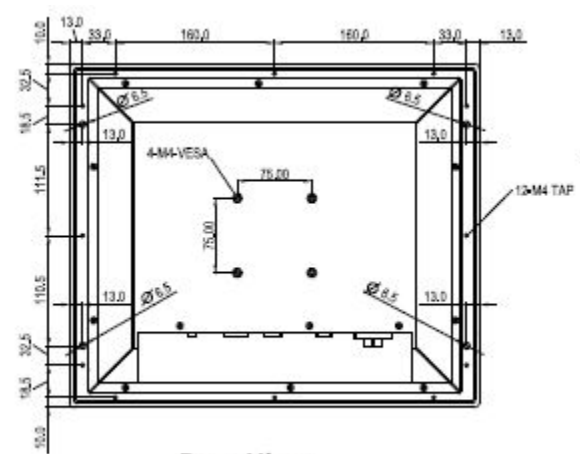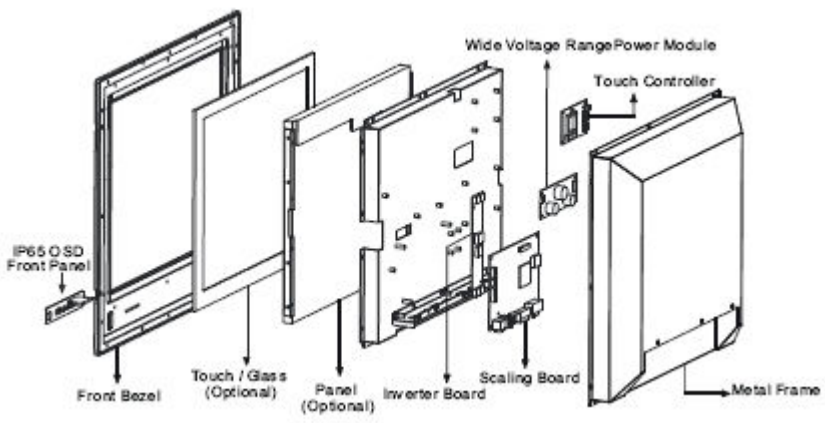

Rear View

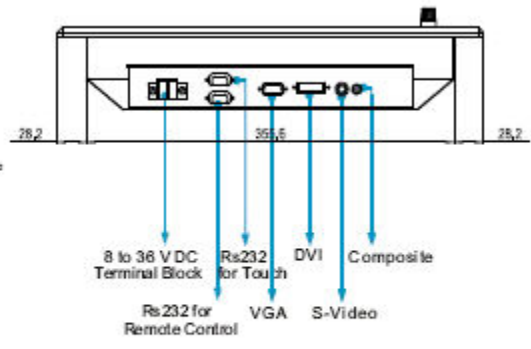

Bottom View

