


# Paper Mount LCD




Specifications	
Model Name	WPM1040OBP1
Viewable Size image	10.4"
Active Display Area (mm)	211.2(H)x158.4(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)(typ.)
Number of Pixels	800x600
Contrast Ratio	500:1(typ.)
Display Color	262,144(6bit/colors)
Brightness(cd/m2)	400
Viewing Angle(CR>=10)	-70~70(H);-55~65(V)
Synchronization Range (Horizontal / Vertical )	31.5~46.9KHz/60~75Hz
Recommended Resolution	800x600@60Hz, 75Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	18W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESADDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive,SAW, IR



**Remarks:** WPM1040OBP1 series= VGA input only  
WPM1040OBP1AV series= VGA+Video Input

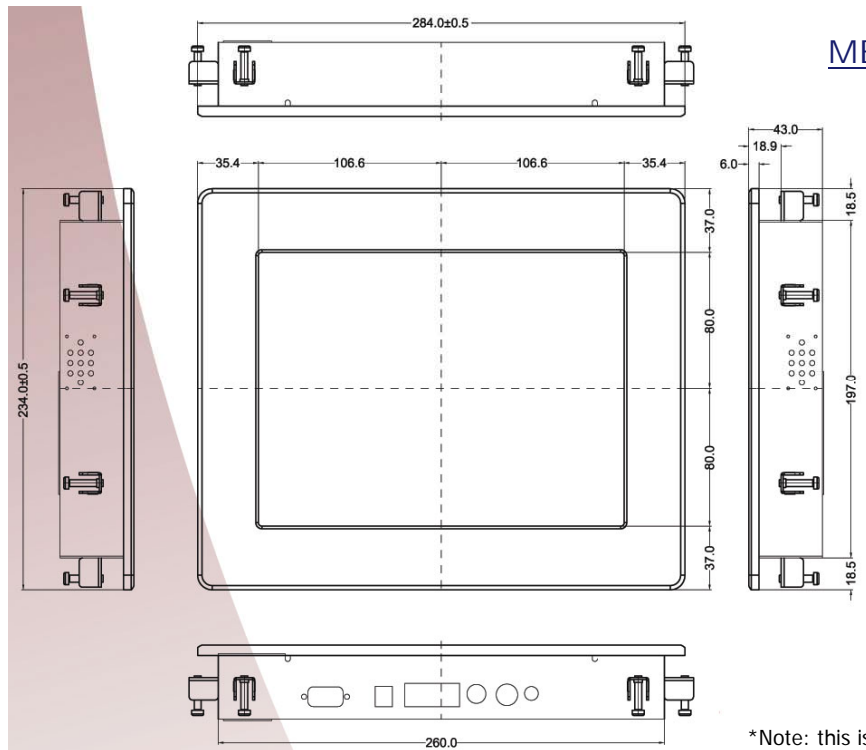

## MECHANICAL DRAWING

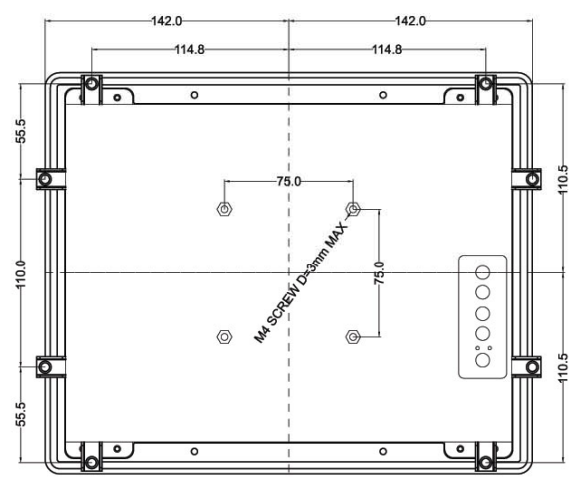

CUT OUT DIMENSION(264x210mm)  
UNIT:mm

\*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

