

Paper Mount LCD




Specifications

| | |
|--|---|
| Model Name | WPM570A1 |
| Viewable Size image | 5.7" |
| Active Display Area (mm) | 115.2(H)x86.4(V) |
| Pixel Pitch(mm) | 0.18(H)x0.18(V) |
| Number of Pixels | 640x480 |
| Contrast Ratio | 300:1(typ.) |
| Display Color | 262,144(6bit/colors) |
| Brightness(cd/m2) | 400 |
| Viewing Angle(CR>=10) | -70,70(H);-40,60(V)(typ.) |
| Synchronization Range (Horizontal / Vertical) | 31.5~37.5KHz/60~75Hz |
| Recommended Resolution | 640x480@60Hz, 75Hz |
| Signal Connector | 15 pin D-sub |
| Power Source | 12V DC in, with External AC to DC Adapter (100~240V AC) |
| Power Consumption | 12W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESADDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | No |
| Optional Touch Screen | Resistive |



Remarks: WPM570A1 series= VGA input only
WPM570A11AV series= VGA+Video Input

MECHANICAL DRAWING

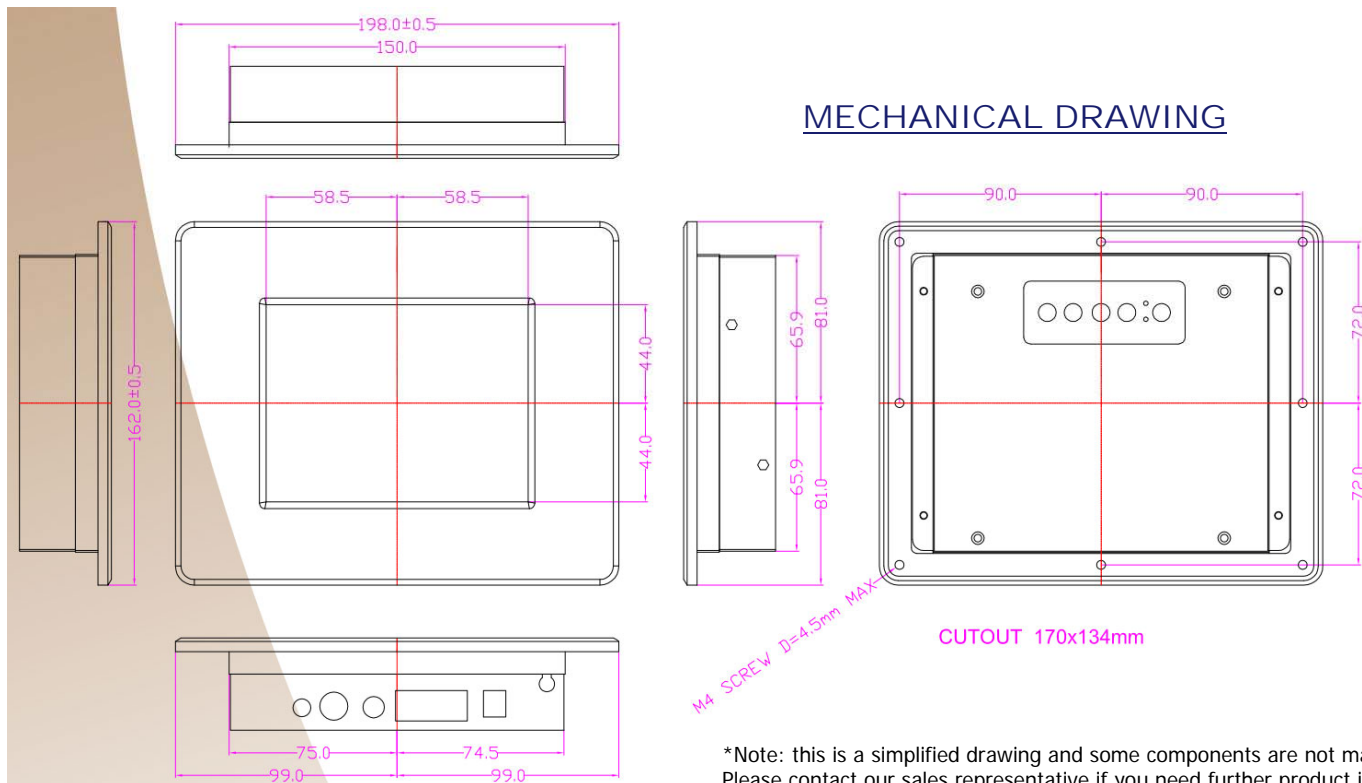

*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

