Panel Mount LCD

Sunlight Readable Panel Mount LCD

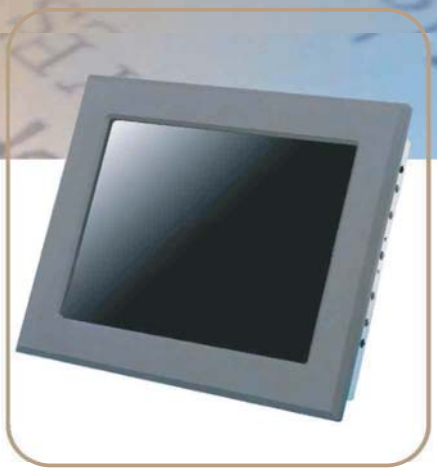

15"

Specifications

Model Name	WPMH1500A1
Viewable Size Image	15"
Active Display Area(mm)	204.128(H)x228.096(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	5000:1(typ.)
Display Color	16.2M(6bits+FRC)
Brightness(cd/m²)	625
Viewing Angle(CR>=10)	-70~70(H);-50~70(V)
Synchronization Range Horizontal/Vertical	31.5~60.0KHz/56~75Hz
Recommended Resolution	1024x768@ 60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	35W typical, normaloperation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, Capacitive, SAW,IR

Remarks:WPMH1500A1= VGA input only

WPMH1500A1AV= VGA+Video Input

Outdoor readability				
Ambient light(nit)	Brightness measure Angle	10,000	30,000	80,000
Brightness gain(BL0n)(nit)	35°	625	780	1,150
Reflectance(net)(%)		1%	0.98%	0.9%

Mechanical Drawing

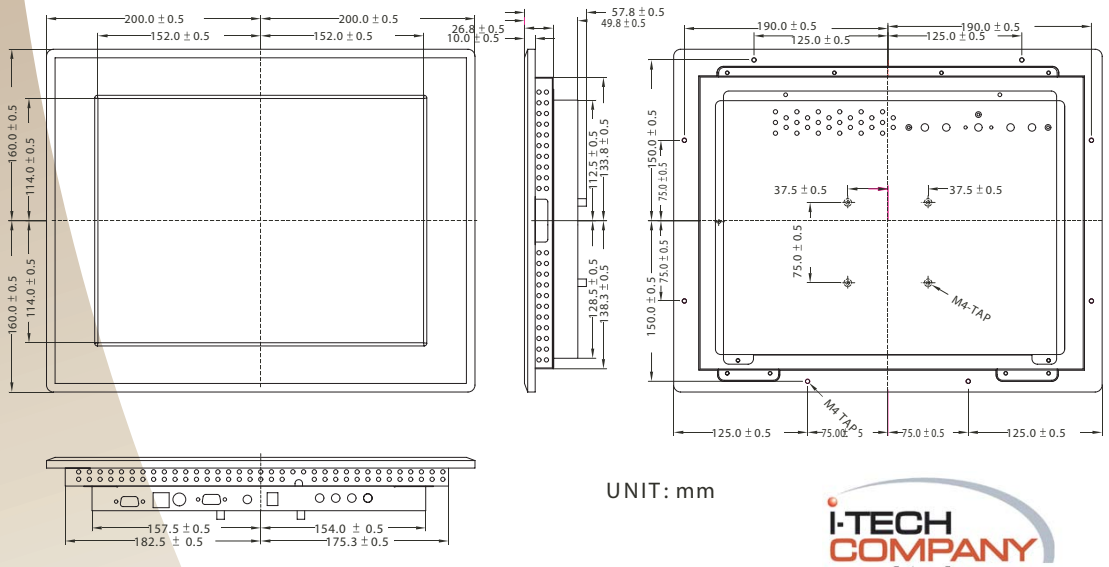

UNIT: mm

I-TECH COMPANY
www.i-techcompany.com
Toll Free: 1-888-483-2418
USA: 1-510-429-9288
Fax: 1-510-372-2736