






## 15" Panel Mount LCD TV

<b>Model</b>	<b>WPMV1500C3</b>	
<b>Panel</b>	Type	15" color active matrix TFT LCD
	Active Display Area(mm)	304.128(H) x 228.096(V)
	Pixel Pitch(mm)	0.297(H) x 0.297(V)
	Number of pixels	1024x768
	Contrast Ratio	700:1 (typ.)
	Display Color	16.2M (6bits+FRC)
	Brightness	250 cd/m2 (typ.)
	Viewing Angles	-70° ~ 70° (H); -65° ~ 60° (V) (CR 10)
	Response Time	8ms (Grey to Grey, typ.)
<b>INPUT</b>	TV (Analog)	1x F (or IEC) connector for ANTENNA or CATV signal
	Video	1x Composite (RCA) 1x S-video (4 pin Mini-DIN)
	PC	RGB analog 15 pin D-sub
	RGB Frequency	H: 31.5~80kHz, V: 60~75Hz
	Audio	1x 3.5mm stereo phone jack
	Digital	DVI-D
<b>AUDIO OUT</b>	Tuner	NTSC or PAL
	Speakers	2x2Watt
<b>POWER</b>	Voltage	AC 100~240V, Universal, 10%
<b>CONTROL FUNCTIONS</b>	Consumption	35 W typical, normal operation
	Basic	Power, Volume +/-, Channel +/-, Source, Menu
	TV Mode	MTS, TV/CATV, Auto Scan, Channel Memory, Channel Delete, Last Channel Recall, Timer for sleep(optional)
	PC Mode	Brightness, Contrast, Color Temperature, Gamma, Scaling, Auto Adjust, Phase, Clock, Position, Auto color, PIP/POP, Reset
	Video Mode	Brightness, Contrast, Scaling, Hue, Saturation, Sharpness, Color Temperature, PIP/POP, Reset
	Audio	Volume, Bass, Treble, Balance, Mute
<b>OPERATING CONDITIONS</b>	Temperature	0-50 C
	Humidity	5-90% (non-condensinal)

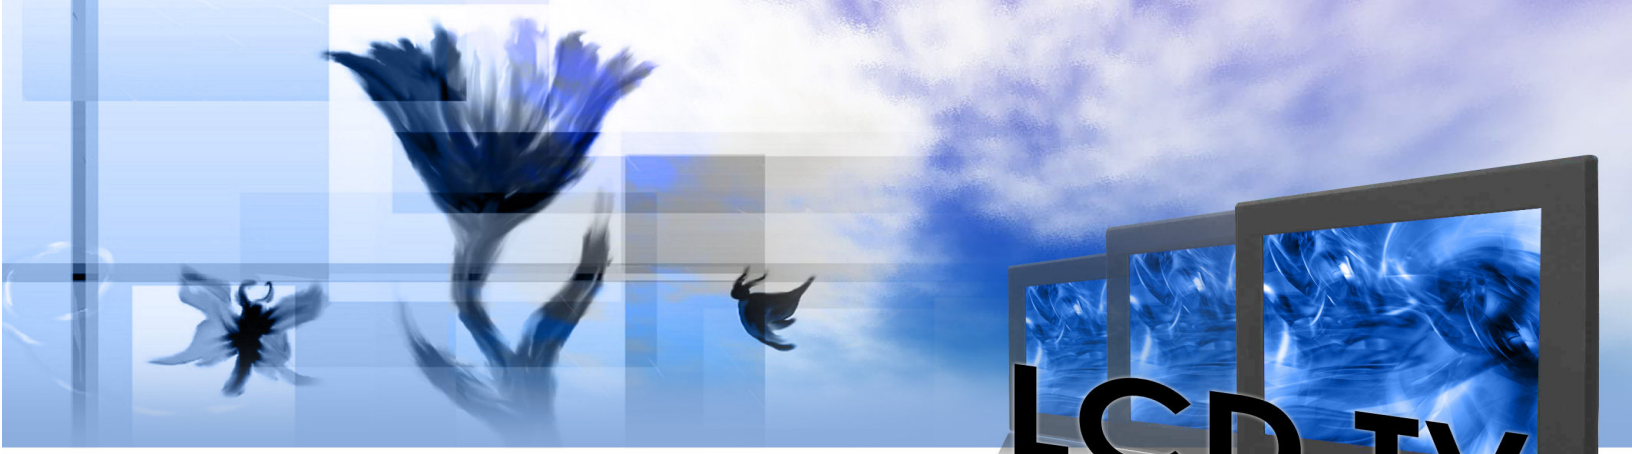


**Control Explanation:**

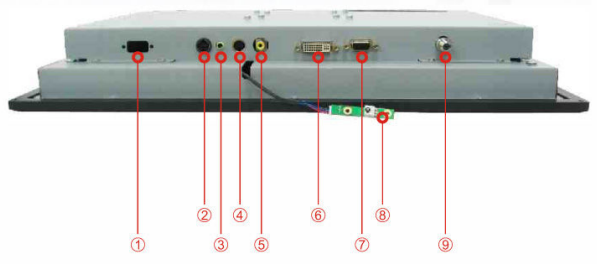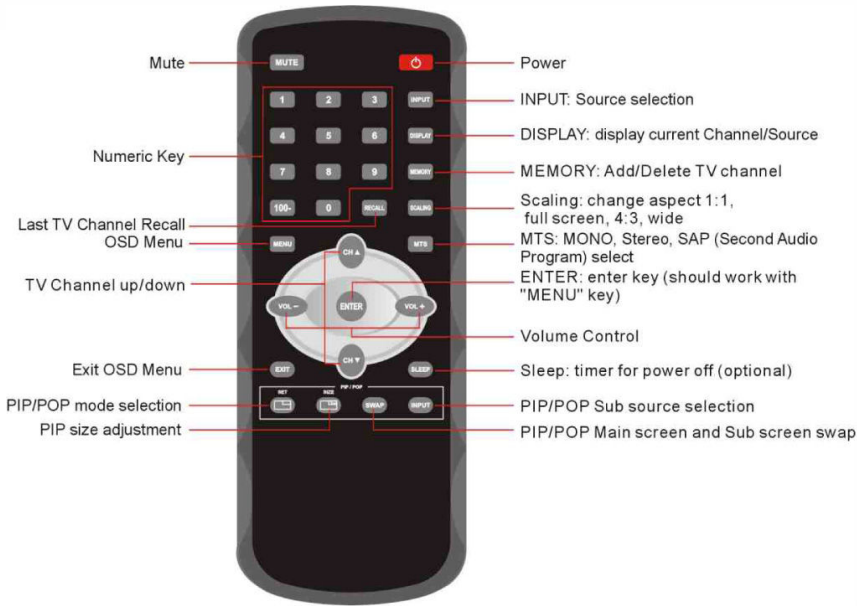

1. RS232 remote control (optional)
2. 12V DC Input
3. Audio Input
4. S-Video ( Y/C )
5. Composite video ( CVBS )
6. DVI-D Input
7. Standart VGA/SOG
8. IR sensor board
9. F (or IEC) connector for ANTENNA to CATV signal Input

**Mechanical Drawing:**

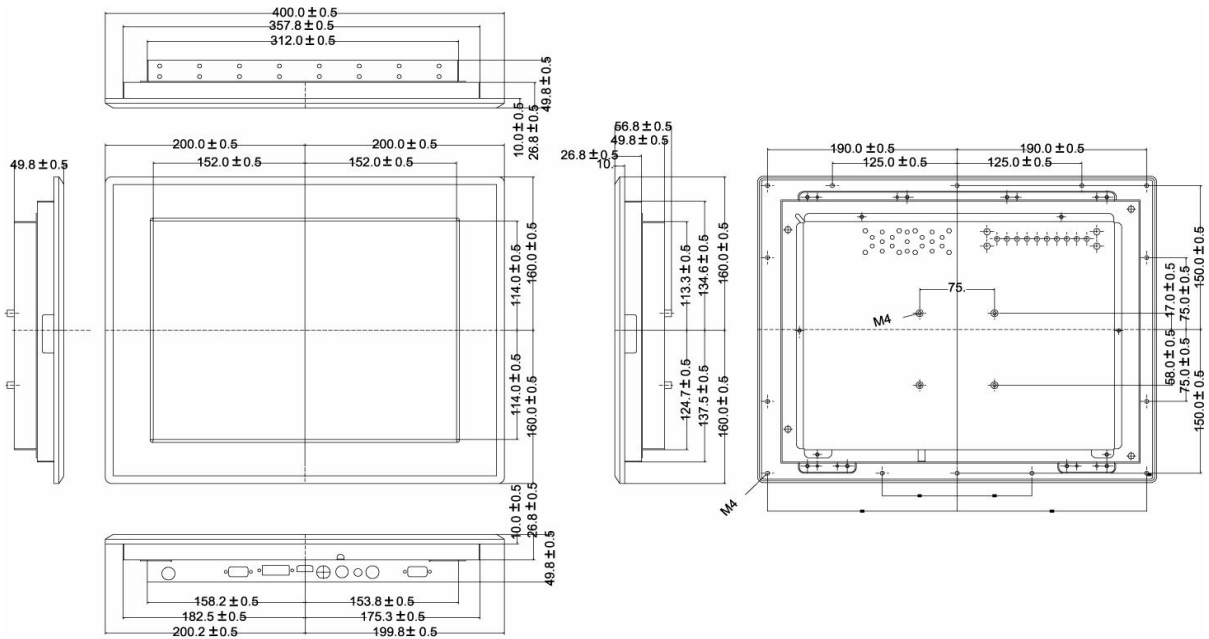

ote: this is a simplified drawing and some components are not marked in detail. please contact our sales representative if you need further product information.

