





## 32" Panel Mount LCD TV

<b>Model</b>	<b>WPMV3200A1</b>	
<b>Panel</b>	Type	32" color active matrix TFT LCD
	Active Display Area(mm)	697.685 (H) x 392.256 (V)
	Pixel Pitch(mm)	0.51075 (H) x 0.51075 (V)
	Number of pixels	1366x768
	Contrast Ratio	2000:1 (typ.)
	Display Color	16.7M (8bit/colors)
	Brightness	450 cd/m2 (typ.)
	Viewing Angles	-89° ~ 89° (H); -89° ~ 89° (V) (CR ≥ 10)
	Response Time	20ms (Grey to Grey, typ.)
<b>INPUT</b>	TV (Analog)	1x F (or IEC) connector for ANTENNA or CATV signal
	Video	1x Composite (RCA) 1x S-video (4 pin Mini-DIN) 1 x Component (YPbPr)
	PC	RGB analog 15 pin D-sub
	RGB Frequency	H: 31.5~80kHz, V: 60~75Hz
	Audio	1x 3.5mm stereo phone jack (for PC) , 1x L/R RCA (for Video)
	Digital	DVI-D
<b>AUDIO OUT</b>	Tuner	NTSC or PAL
	Speakers	2x10Watt
<b>POWER</b>	Voltage	AC 100~240V, Universal, ±10%
<b>CONTROL FUNCTIONS</b>	Consumption	140 W typical, normal operation
	Basic	Power, Volume +/-, Channel +/-, Source, Menu
	TV Mode	MTS, TV/CATV, Auto Scan, Channel Memory, Channel Delete, Last Channel Recall, Timer for sleep(optional)
	PC Mode	Brightness, Contrast, Color Temperature, Gamma, Scaling, Auto Adjust, Phase, Clock, Position, Auto color, PIP/POP, Reset
	Video Mode	Brightness, Contrast, Scaling, Hue, Saturation, Sharpness, Color Temperature, PIP/POP, Reset
<b>OPERATING CONDITIONS</b>	Audio	Volume, Bass, Treble, Balance, Mute
	Temperature	0-50 C
	Humidity	5-90% (non-condensina)

# LCD TV

## Control Explanation:

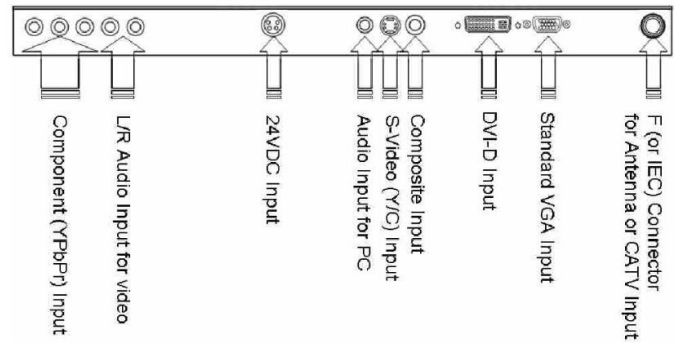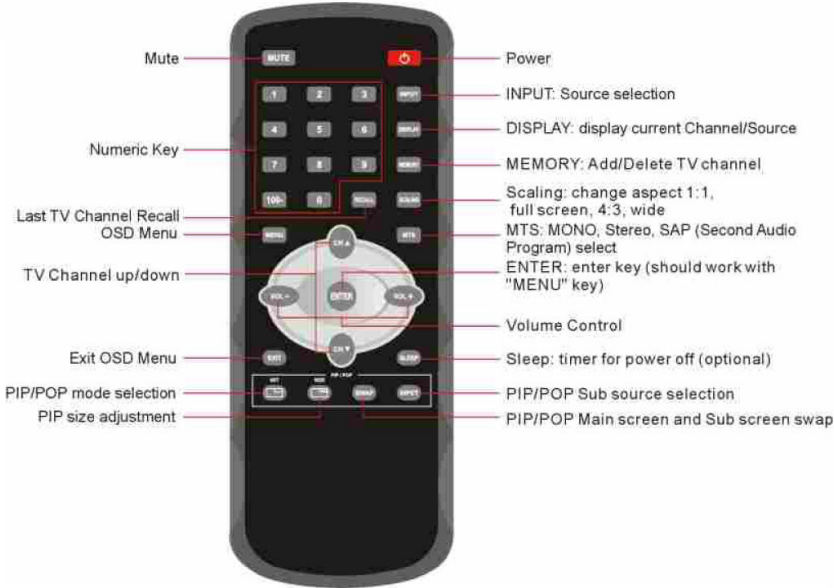

## Mechanical Drawing:

