



# Open Frame LCD

## Specifications


Model Name	WOP1210M2
Viewable Size image	12.1"
Active Display Area (mm)	245.76(H)x184.32(V)
Pixel Pitch(mm)	0.240(H)x0.240(V) (typ.)
Number of Pixels	1024x768
Contrast Ratio	700:1 (typ.)
Display Color	262,144 (6bits/color)
Brightness(cd/m2)	500 (typ.)
Viewing Angle(CR>=10)	-80~80(H); -70~70(V)
Synchronization Range (Horizontal / Vertical )	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	20W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, Capacitive, SAW, IR




**Remarks:** WOP1210M2 series= VGA input only  
WOP1210M2AV series= VGA+Video Input

## PHOTO GALLERY



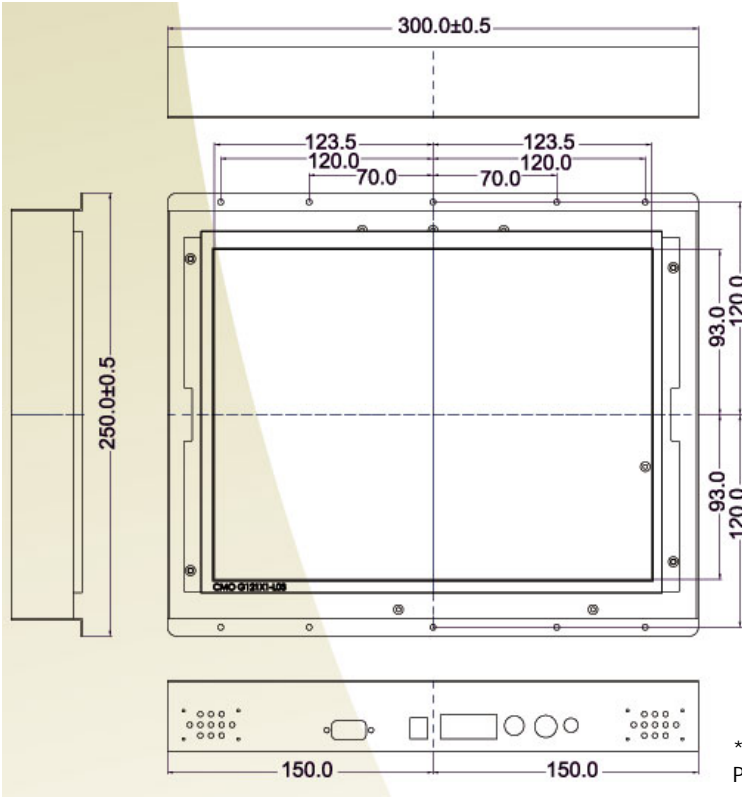

## MECHANICAL DRAWING

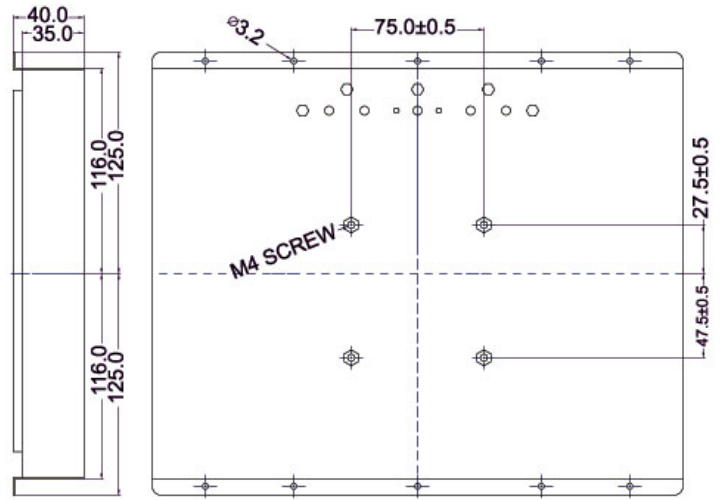

UNIT:mm

\*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.