

Open Frame LCD




Specifications

Model Name	WOP2010A2
Viewable Size image	20.1"
Active Display Area (mm)	408.0(H)x306.0(V)
Pixel Pitch(mm)	0.255(H)x0.255(V)
Number of Pixels	1600x1200(UXGA)
Contrast Ratio	800:1(typ.)
Display Color	16.7M(8bits+FRC)
Brightness(cd/m2)	300(typ.)
Viewing Angle(CR>=10)	-89~89(H); -89~89(V)
Synchronization Range (Horizontal / Vertical)	31.5~80.0KHz/60~75Hz
Recommended Resolution	1600x1200@ 60Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	60W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	SAW, Resistive



Remarks: WOP2010A2 series= VGA input only
WOP2010A2AV series= VGA+Video Input

MECHANICAL DRAWING

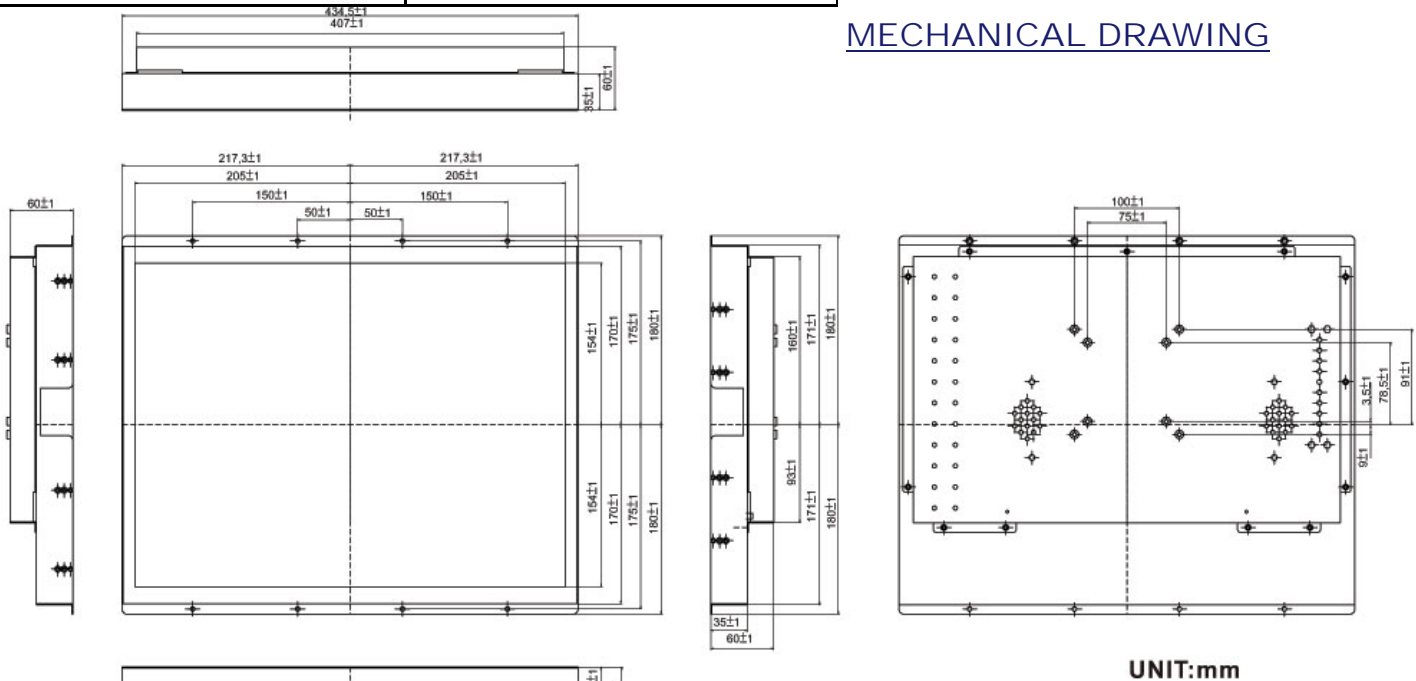

*Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: info@itechlcd.com • WEB: www.iTechLCD.com