

Sunlight Readable Open Frame LCD

Specifications	
Model Name	WOPHW700A4
Viewable Size image	7" (16:9)
Active Display Area (mm)	152.4(H)x91.44(V)
Resolution(DOT)	800x480
DOT Pitch(mm)	0.1905(H)x0.1905(V)
Number of Pixels	800(H)x480(V)
Color Configuration	R.G.B. Stripe
Contrast Ratio	1000:1 (typ.)
Brightness(cd/m2)	500 (typ.)
Viewing Angle(CR>=10)	-80~80 (H); -60~80 (V)
Power Source	AC100~240V, Universal, 10%
Power Consumption	8W typical, normal operation
Power Management	VESA DPMS Compliant
Video Input	S-Video, Composite, VGA
Plug & Play	Yes
Support Video Signal Type	NTSC/PAL
Optional DVI Input	No
Optional Touch Screen	4 Wire Resistive





Remarks: WOPHW700A4 = VGA input only
WOPHW700A4AV = VGA+Video Input

Outdoor readability **				
Ambient light(nit)	Brightness measure Angle	15,000	30,000	80,000
Brightness gain(nit)	35°	500	620	990
Reflectance(net)(%)		1.00%	0.90%	0.80%



MECHANICAL DRAWING

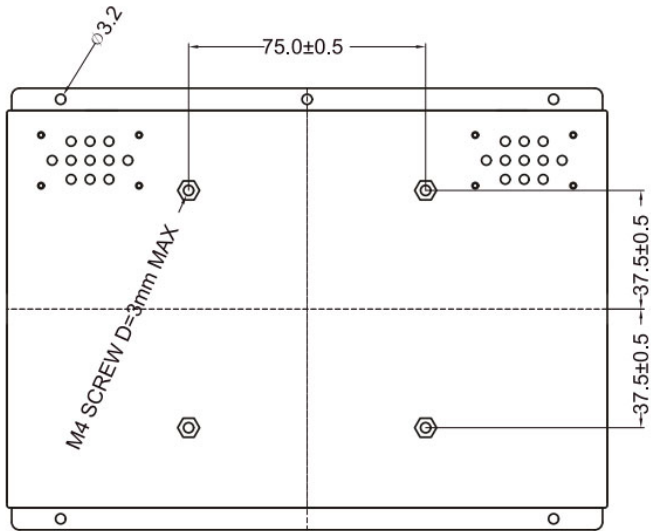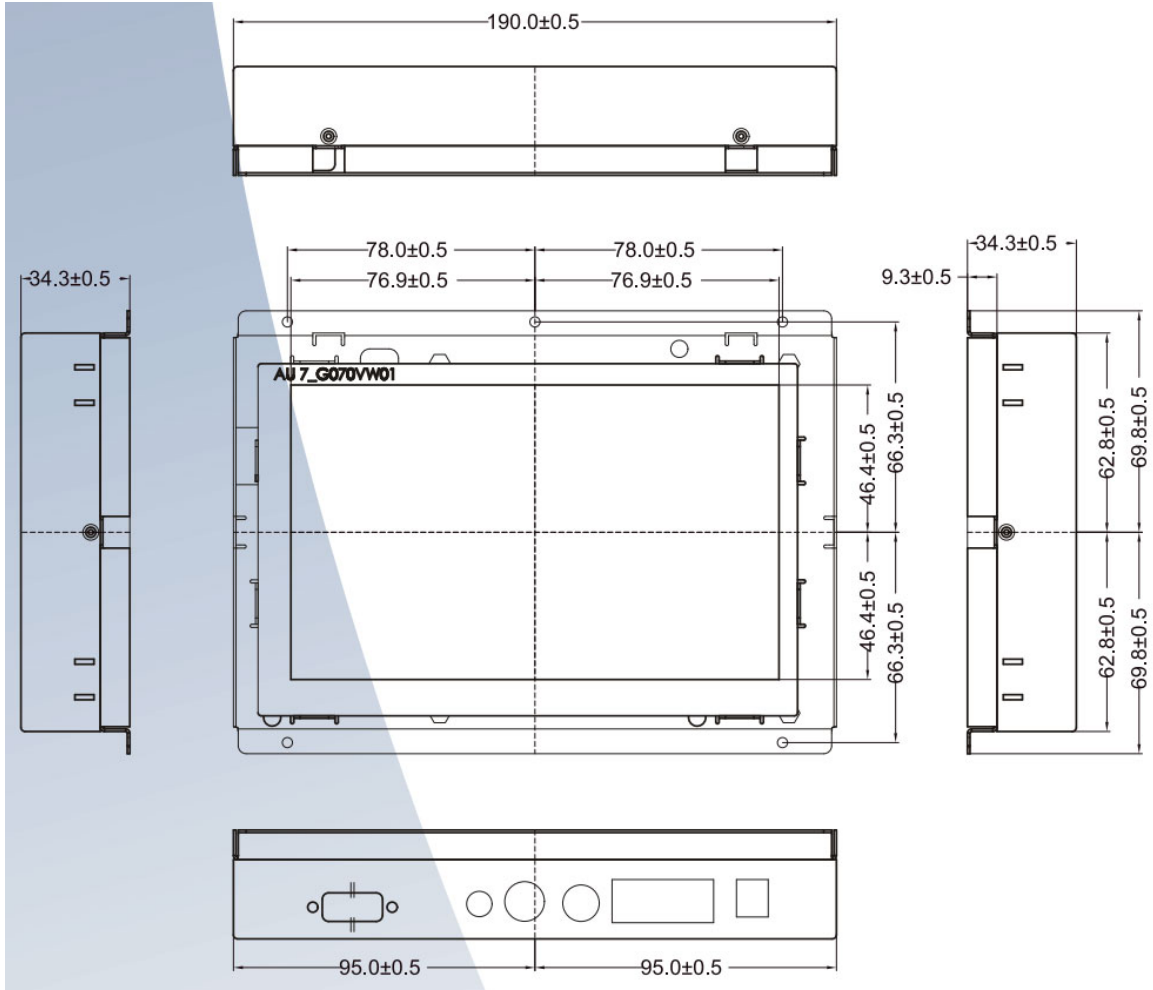

UNIT:mm

Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.