

# Paper Mount LCD




## Specifications


Model Name	WPM1210L1
Viewable Size image	12.1"
Active Display Area (mm)	246.0(H)x184.5(V)
Pixel Pitch(mm)	0.3075(H)x0.3075(V)
Number of Pixels	800x600
Contrast Ratio	600:1(typ.)
Display Color	262,144(6bit/colors)
Brightness(cd/m2)	400 (typ.)
Viewing Angle(CR>=10)	-70~70(H); -50~60(V)(typ.)
Synchronization Range (Horizontal / Vertical )	31.5~46.9KHz/60~75Hz
Recommended Resolution	800x600@60Hz, 75Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	15W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, Capacitive, SAW,IR



**Remarks:** WPM1210L1 series= VGA input only  
WPM1210L1AV series= VGA+Video Input

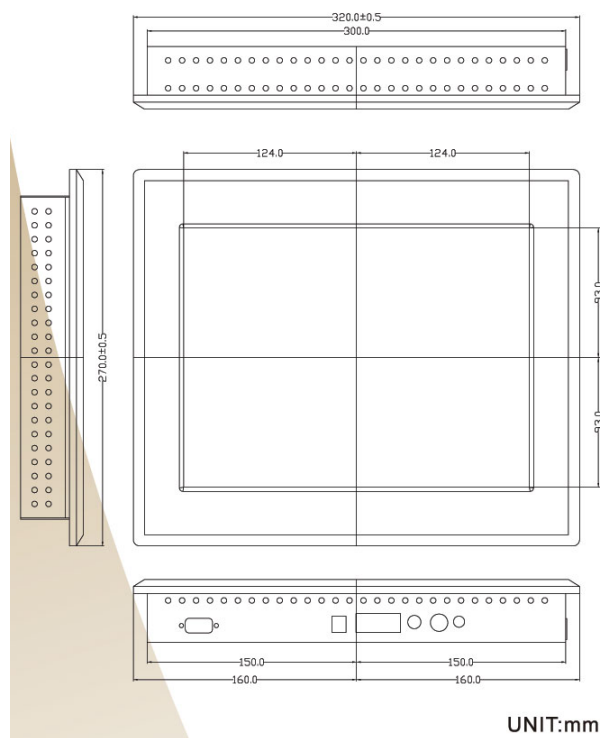

## MECHANICAL DRAWING

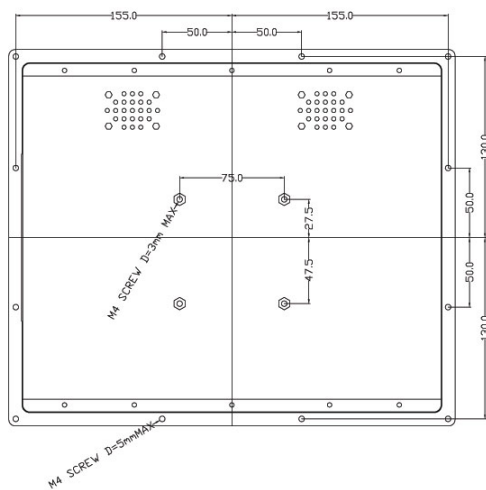

i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@itechlcd.com](mailto:info@itechlcd.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)