

# Paper Mount LCD





## Specifications

Model Name	WPM1500C3
Viewable Size image	15"
Active Display Area (mm)	304.1(H)x228.1(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	500:1(typ.)
Display Color	16.2M(6bit+FRC)
Brightness(cd/m2)	250 (typ.)
Viewing Angle(CR>=10)	-70~70(H); -60~65(V)
Synchronization Range (Horizontal / Vertical )	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW,IR



Remarks: WPM1500C3 series= VGA input only  
WPM1500C3AV series= VGA+Video Input

## MECHANICAL DRAWING

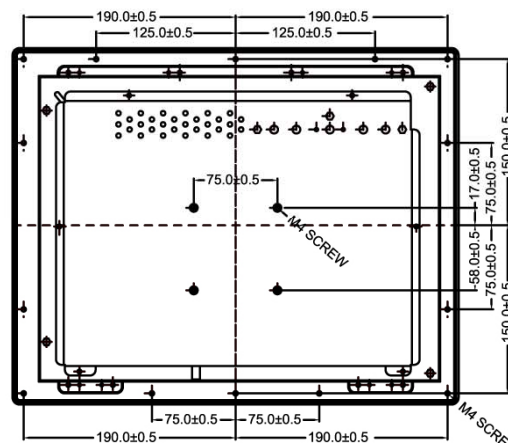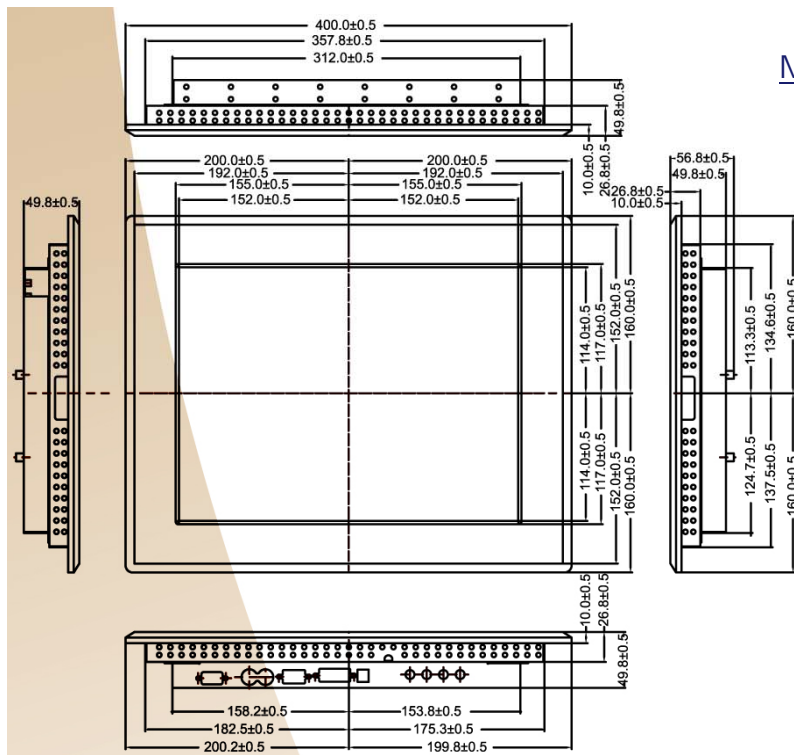

UNIT:mm

CUT OUT DIMENSION(360x280mm)



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@itechlcd.com](mailto:info@itechlcd.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)