

# Panel Mount LCD



## Specifications

Model Name	WPM1700M1
Viewable Size image	17"
Active Display Area (mm)	337.92(H)x270.34(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)
Number of Pixels	1280x1024
Contrast Ratio	1000:1 (typ.)
Display Color	16.7M
Brightness(cd/m2)	350 (typ.)
Viewing Angle(CR>=10)	-85~85(H); -80~80(V)
Synchronization Range (Horizontal / Vertical )	31.5~80.0KHz/60~75Hz
Recommended Resolution	1280x1024@60Hz, 75Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	36W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive. Capacitive. SAW




**Remarks:** WPM1700M1 series= VGA input only  
WPM1700M1AV series= VGA+Video Input




i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@itechlcd.com](mailto:info@itechlcd.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)

# MECHANICAL DRAWING

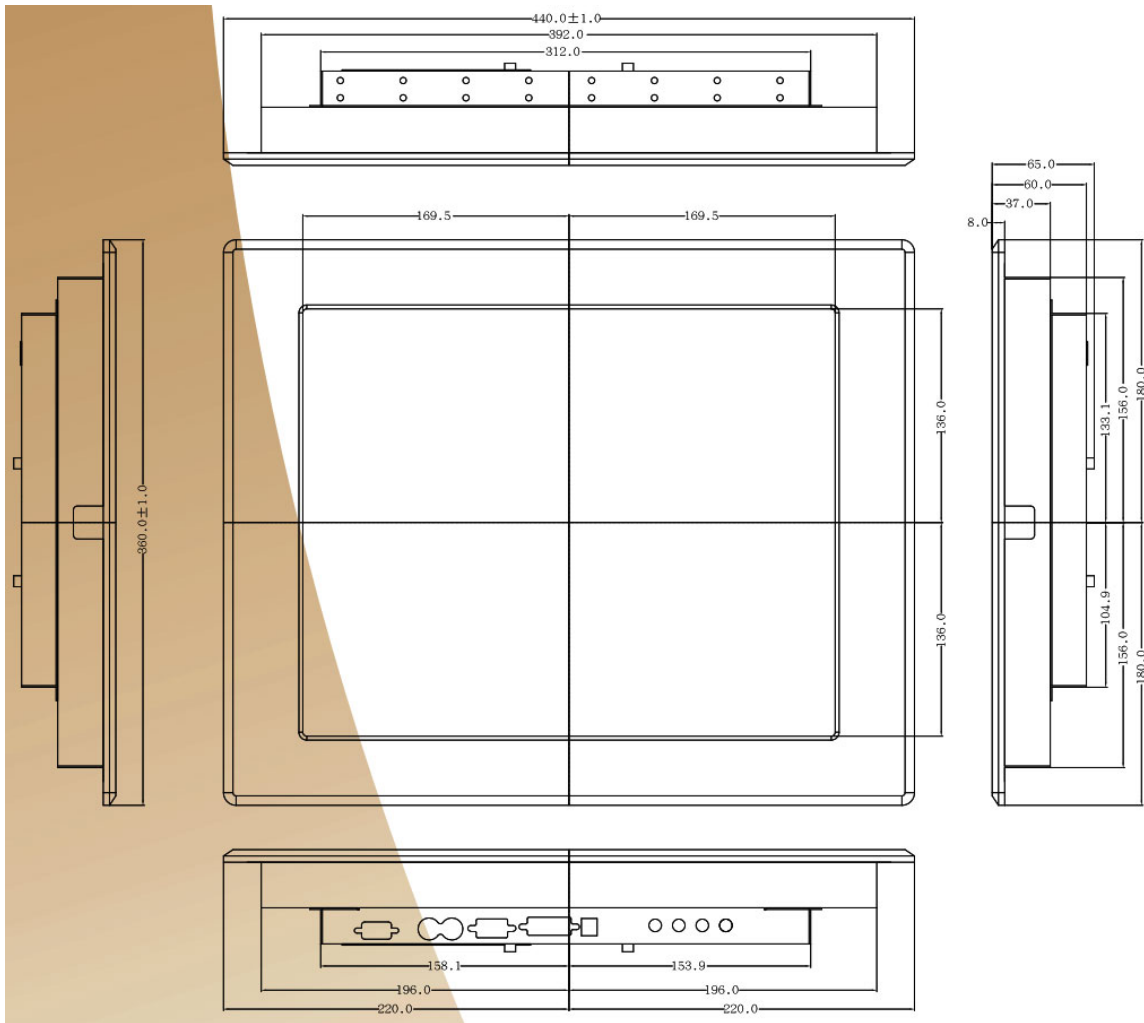

CUT OUT DIMENSION(412x332mm)  
UNIT:mm

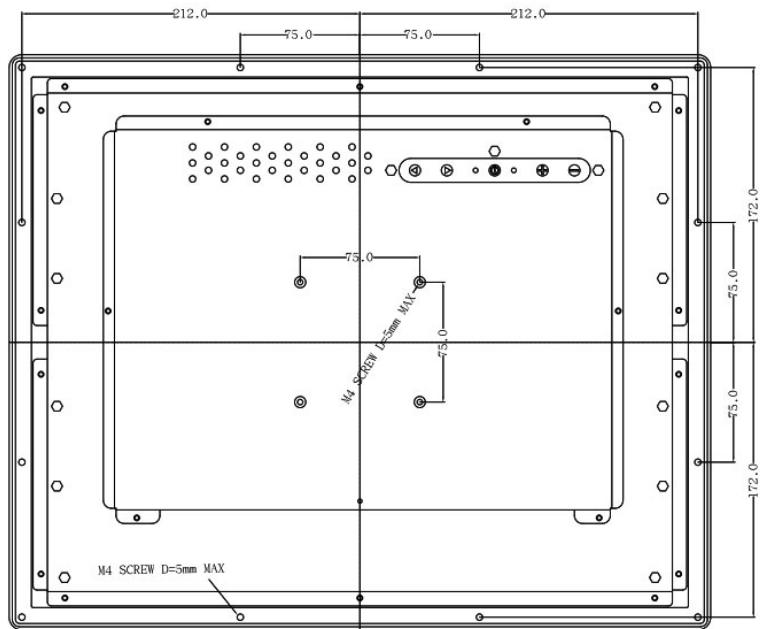

i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@itechlcd.com](mailto:info@itechlcd.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)