Specifications	
Model Name	WPM1900M2
Viewable Size image	19”
Active Display Area (mm)	376.32(H)x301.56(V)
Pixel Pitch(mm)	0.294(H)x0.294(V)
Number of Pixels	1280x1024
Contrast Ratio	1300:1(typ.)
Display Color	16.7M (8 bits/colors)
Brightness(cd/m2)	300 (typ.)
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Synchronization Range (Horizontal / Vertical)	31.5~80.0KHz/60~75Hz
Recommended Resolution	1280x1024@60Hz, 75Hz
Signal Connector	15 pin D-sub
Power Source	AC100~240V, Universal, 10%
Power Consumption	41W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW,IR

Remarks: WPM1900M2 series= VGA input only
WPM1900M2AV series= VGA+Video Input

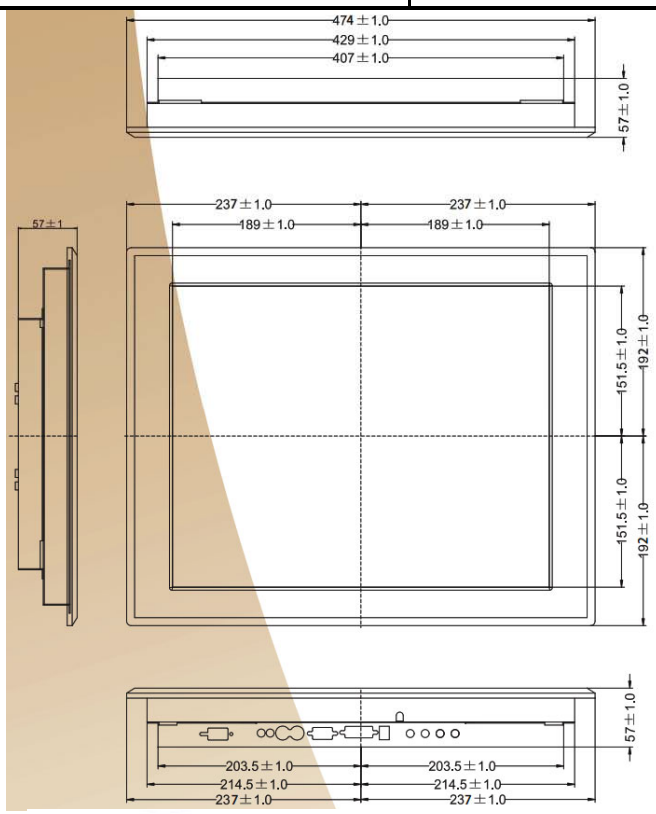

MECHANICAL DRAWING

8 mm front bezel with Resistive Touch, Glass

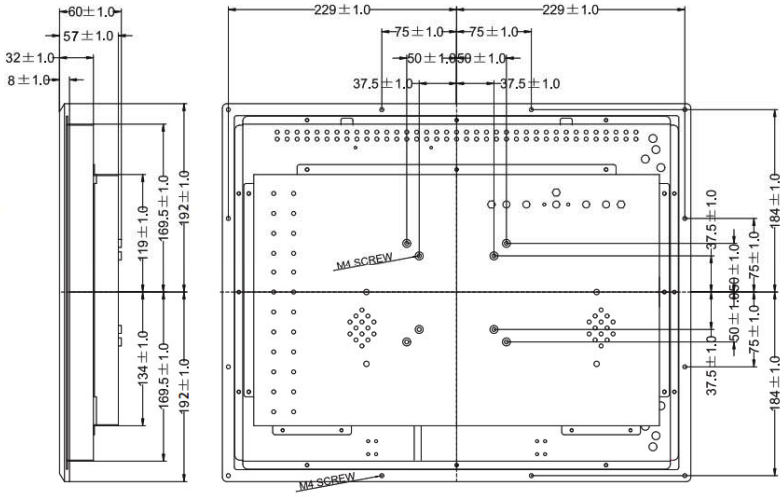

CUT OUT DIMENSION(446x356mm)
UNIT:mm

i-Tech Company LLC
TOLL FREE: (888) 483-2418 • EMAIL: info@itechlcd.com • WEB: www.iTechLCD.com