Specifications	
Model Name	WPMS1500C3
Viewable Size image	15”
Active Display Area (mm)	304.1(H)x228.1(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	500:1(typ.)
Display Colors	16.2M(6bit+FRC)
Brightness(cd/m)	250(typ.)
Viewing Angle(CR>=10)	-70~70; -60~65
Synchronization Range Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW, IR

Remarks: WPMS1500A1 series= VGA input only
WPMS1500A1AV series= VGA+Video Input

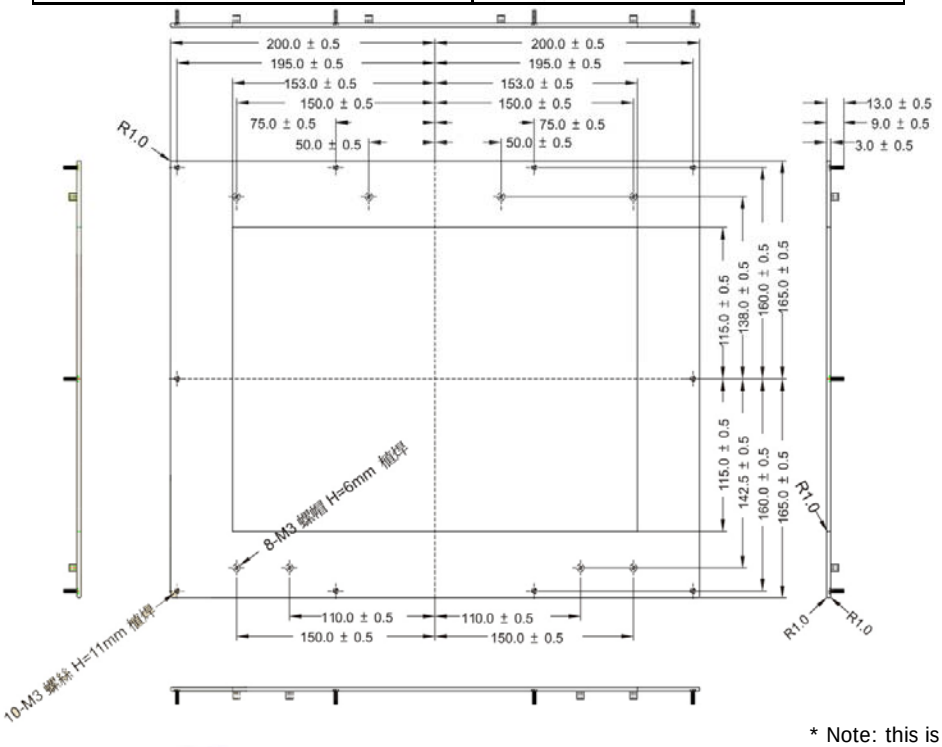

MECHANICAL DRAWING

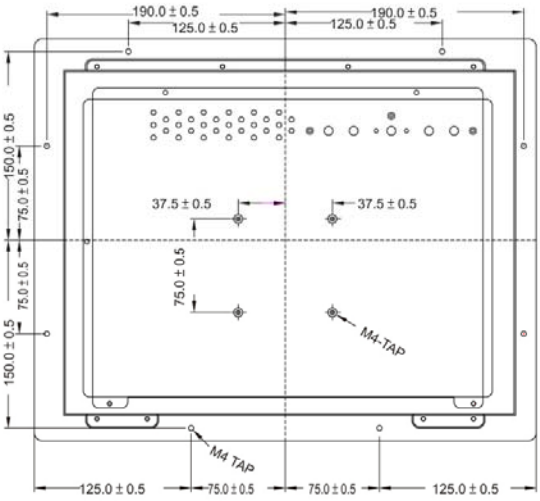

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

i-Tech Company LLC
TOLL FREE: (888) 483-2418 • EMAIL: info@iTechLCD.com • WEB: www.iTechLCD.com

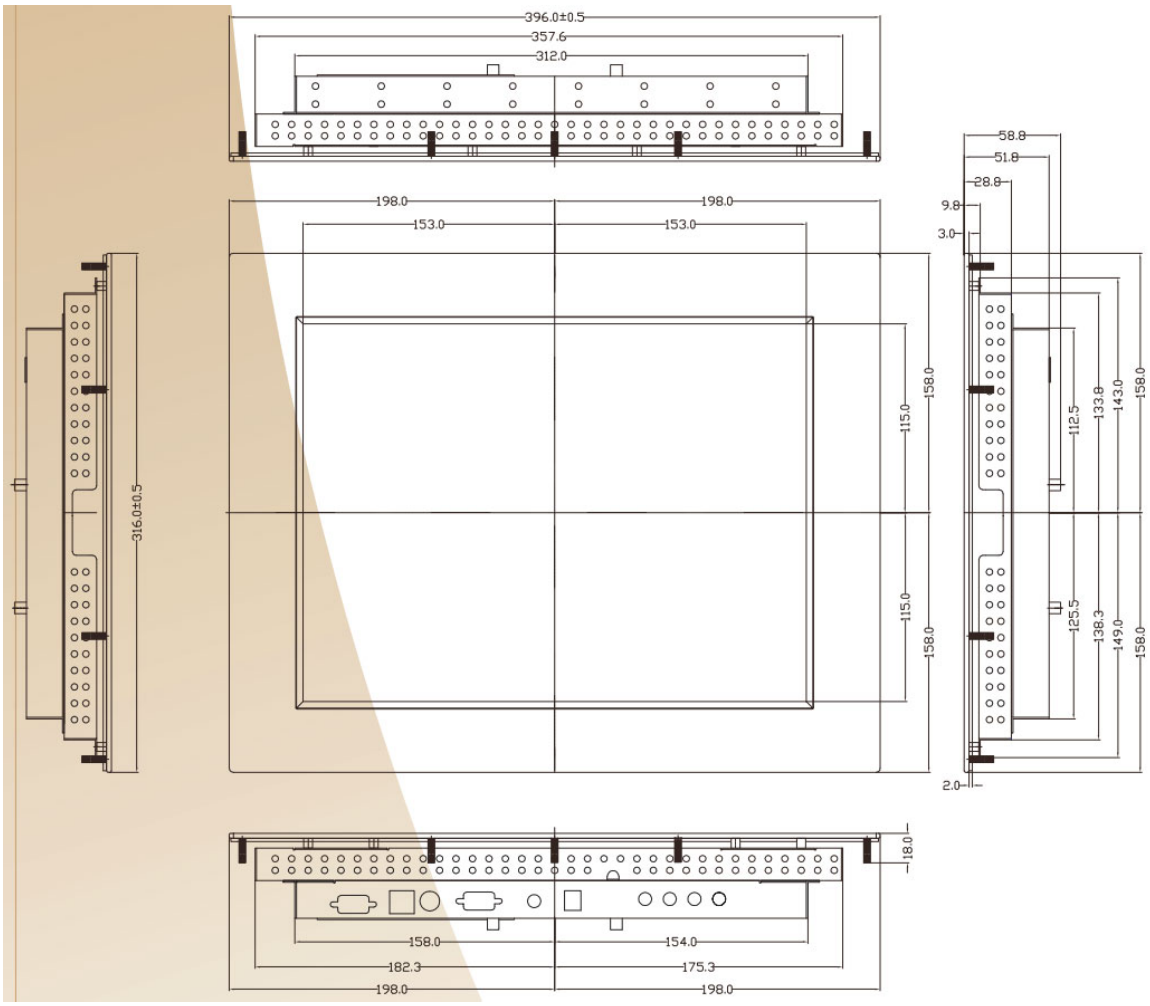
396.0±0.5
357.6
312.0
198.0
153.0
198.0
153.0
58.8
51.8
28.8
9.8
3.0
158.0
115.0
115.0
158.0
316.0±0.5
112.5
133.8
143.0
158.0
125.5
138.3
149.0
158.0
2.0
18.0
158.0
154.0
182.3
175.3
198.0
198.0

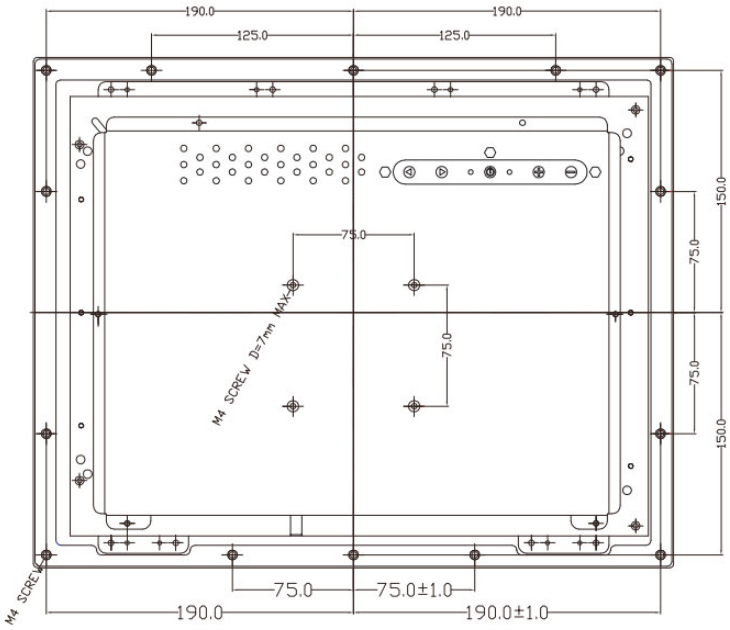
190.0
190.0
125.0
125.0
150.0
75.0
75.0
75.0
75.0
150.0
M4 SCREW D=7mm MAX
M4 SCREW
75.0
75.0±1.0
190.0
190.0±1.0