

# Stainless Steel LCD





Specifications	
Model Name	WPMS1700M1
Viewable Size image	17"
Active Display Area (mm)	337.92(H)x270.34(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)
Number of Pixels	1280x1024
Contrast Ratio	1000:1 (typ.)
Display Colors	16.2M(6bit+FRC)
Brightness(cd/m )	350(typ.)
Viewing Angle(CR>=10)	-80~80(H);-80~80(V)
Synchronization Range Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1280x1024@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	32W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW



Remarks: WPMS1700M1 series= VGA input only  
 WPMS1700M1AV series= VGA+Video Input

## MECHANICAL DRAWING

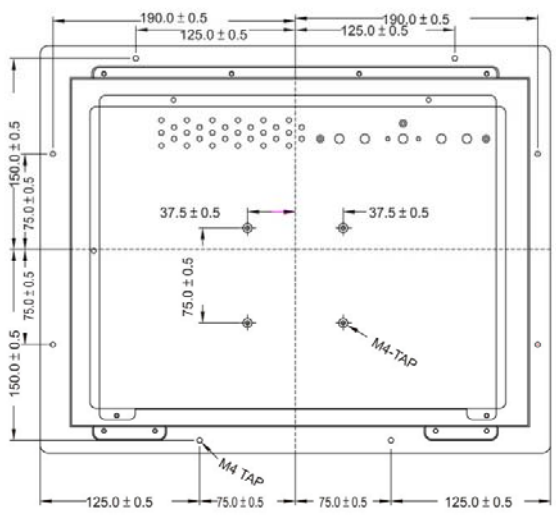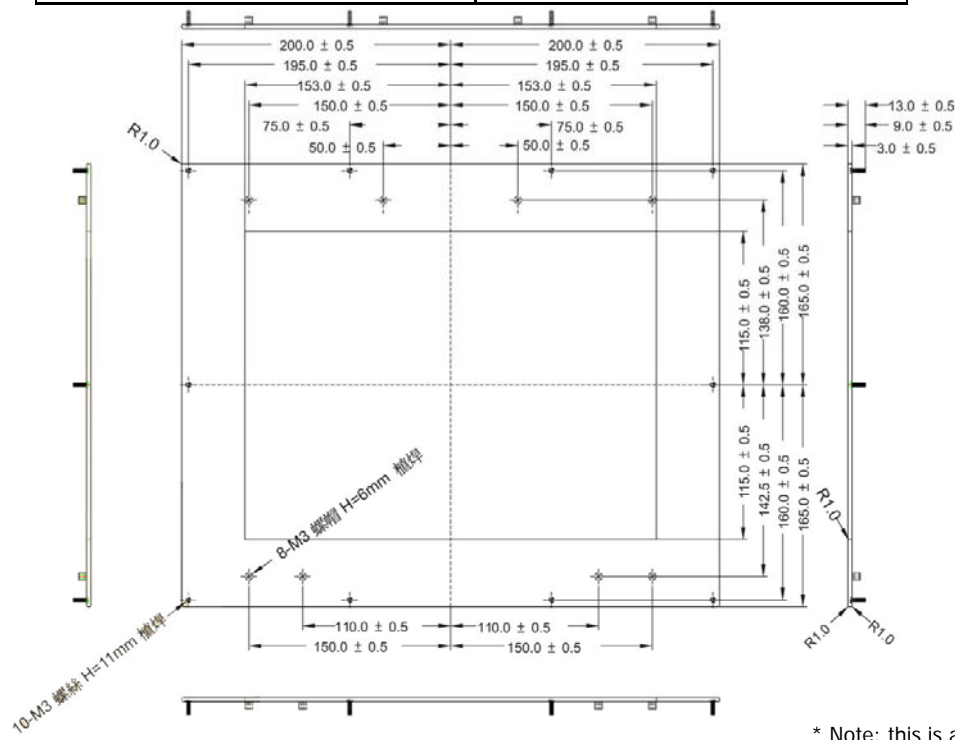

UNIT:mm

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

