

Ruggedized LCD Display

12.1" Wide Panel, 1280x800, Full IP65,
Anti-Corrosion Housing Fanless,
DC lockable connector, 400nits
(Model: WRD1210M9)

Product Features:


- High Quality 12.1" Wide panel, 1280 x 800 resolution, 400 nits
- 4 Wire resistive touch screen
- -20 ~ +55°C Wide Range Operating Temperature
- Anti-Corrosion housing with Fanless Design
- 9V ~ 36V DC Isolation Wide Range Power Input
- EN50155 Certified



Product Specifications:


Display	Model Name	WRD1210M9
	Size	12.1"
	Resolution (pixels)	1280 x 800
	Number of Colors	262K colors (RGB 6bits)
	Brightness (cd/m ²)	400
	Contrast Ratio	1000:1
	Viewing Angle	-88~88 (H) ; -88~88 (V)
	Active Area	261.12 (H) x 163.2 (V)
Touch (optional)	4 wire resistive	
Input / Output	1 x RS-232 for Touch (Optional) 1 x S-Video (Optional) 1 x Composite (Optional) 1 x VGA 1 x DVI-D (Optional) 1 x DC Lockable input (Optional) 1 x 9~36V DC Terminal Block (Default)	
Environment	Operating Temperature	-20 ~55°C
	Storage Temperature	-30 ~70°C
	Humidity	10 ~ 95% non-condensing
	Shock	EN50155
	Vibration	EN50155
	EMC	CE, FCC ClassB, EN50155 Certified
Safety	Compliance with EN50155, MIL-STD 810F	
Mechanical	Dimension(W x H x D)	310 x 215 x 45mm
Packing List	R2A AD Board User's Manual Touch's Driver CD	

I/O View:

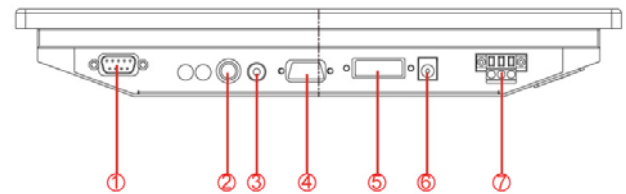

1. RS-232 for Touch(Optional)
2. S-Video(Optional)
3. Composite(Optional)
4. VGA
5. DVI-D(Optional)
6. DC Lockable input(Optional)
7. 9~36V DC Terminal Block(Default)

Front OSD Control Function:

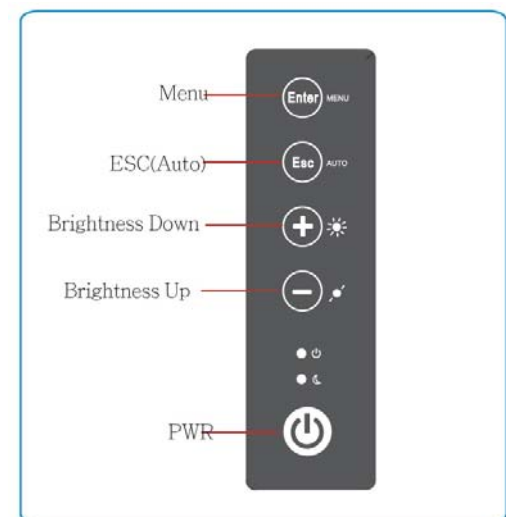

Model: WRD1210P3



Mechanical Drawing:

