

Panel Mount LCD



IP65 front Panel Mount (Metal-3mm), 24" LCD Monitor
1920 x 1080, 300 nits, VGA+DVI+HDMI, Side OSD, including
rear screw/Clamp/VESA Mount with 5 Wire Resistive Touch
Screen and USB Controller Integrated IP65 Front Panel
Integrated DC 90-125V DC Input (Built-in). Terminal Block "+" and "-"

MODEL: CPMW2400IP-TR-125DC

FEATURES:

- Modular construction for more flexibility in terms of product configuration as well easy maintenance
- Optional build-in touch screen for interactive application
- Available with auto-brightness sensor offers application in day and night
- VGA connector with optional AV,SV,AV-Looping
- Complete custom design/solution for OEM customers

SPECIFICATIONS:

| | | | |
|----------------------------|--|--|---|
| Panel | Cell Type / Glass Surface | TFT LCD / Black Anti-Glare, low reflection coating | |
| | Aspect Ratio/Size | Wide / 24" viewable diagonal area | |
| | Active Area / Pixel Pitch | 532.50(H) x 300(V) mm / 0.2768(H) x 0.2768(V) mm | |
| | Native Resolution / Colors | 1920(H) x 1080(V) / 16.7M | |
| | Brightness / Contrast | 300 cd/m2 (typ) / 1000 : 1 | |
| | Response Time | ≤ 15 ms | |
| | Viewing Angle (typical) | H.170° (- 85° ~ + 85°) , V. 160° (- 80° ~ + 80°) | |
| | Light Source | LED backlight, Long life, 35,000 hrs (typ) | |
| Input Sources | PC System | Signal | Analog RGB (0.7/1.0 V _{p,p} , 75 ohms) |
| | | Sync | Separate Sync, Composite Sync, Sync On Green |
| | | Frequency | F _H : 30 - 82Khz , F _V : 50 -75Hz |
| | Audio System | 2W Speaker x 2 | |
| Input Terminals | 1 x VGA, 1 x HDMI, 1 x DVI, 1 x PC Audio (Stereo Headphone Jack) , 1 x DC Power Plug | | |
| Convenient Features | Auto Calibration , Back Light Adjustment, Plug&Play (VESA DDC/CI, DDC 2B) | | |
| | OSD Multi-Languages , Wall Mount Ready (VESA Dimension - please refer to Drawing) | | |
| Power | Internal power supply with universal / Auto-Sensing, AC 90 to 260V, 50 / 60 Hz | | |
| Power Consumption | 18W ~ 20W | | |
| Operating Condition | Temperature / Humidity | 0°C ~ 50°C (32°F ~ 122°F), 10% ~ 90% (no condensation) | |
| Storage Condition | Temperature / Humidity | - 20°C ~ 60°C (- 4°F ~ 140°F), 10% ~ 90% (no condensation) | |
| Certification | | FCC,CE | |
| Dimensions | Physical | Please refer to Drawing | |
| | Carton | W x H x D = TBD | |
| Weight | N.W. / G.W. | 12 Kgs / 13.5 Kgs | |
| Container Loaded | 20ft / 40ft / 40ft HQ | TBD | |


**Specifications subject to change without notice, not responsible for typographical errors.*

OPTIONS:

- **Touch:** Resistive touch, Capacitive, SAW, Infrared, and Protected glass
- **Video/TV:** Video/TV, SV + AV, SV + AV + AV_Looping, SV + AV + TV
- **Enhanced Panel:** Panel with LED backlight, High brightness panel, Wide Temperature, Sunlight Readable
- **Others optional features:** Digital Signage (Standalone), Networking Digital Signage, Motion Sensor, Light Sensor, Auto-Dimming

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

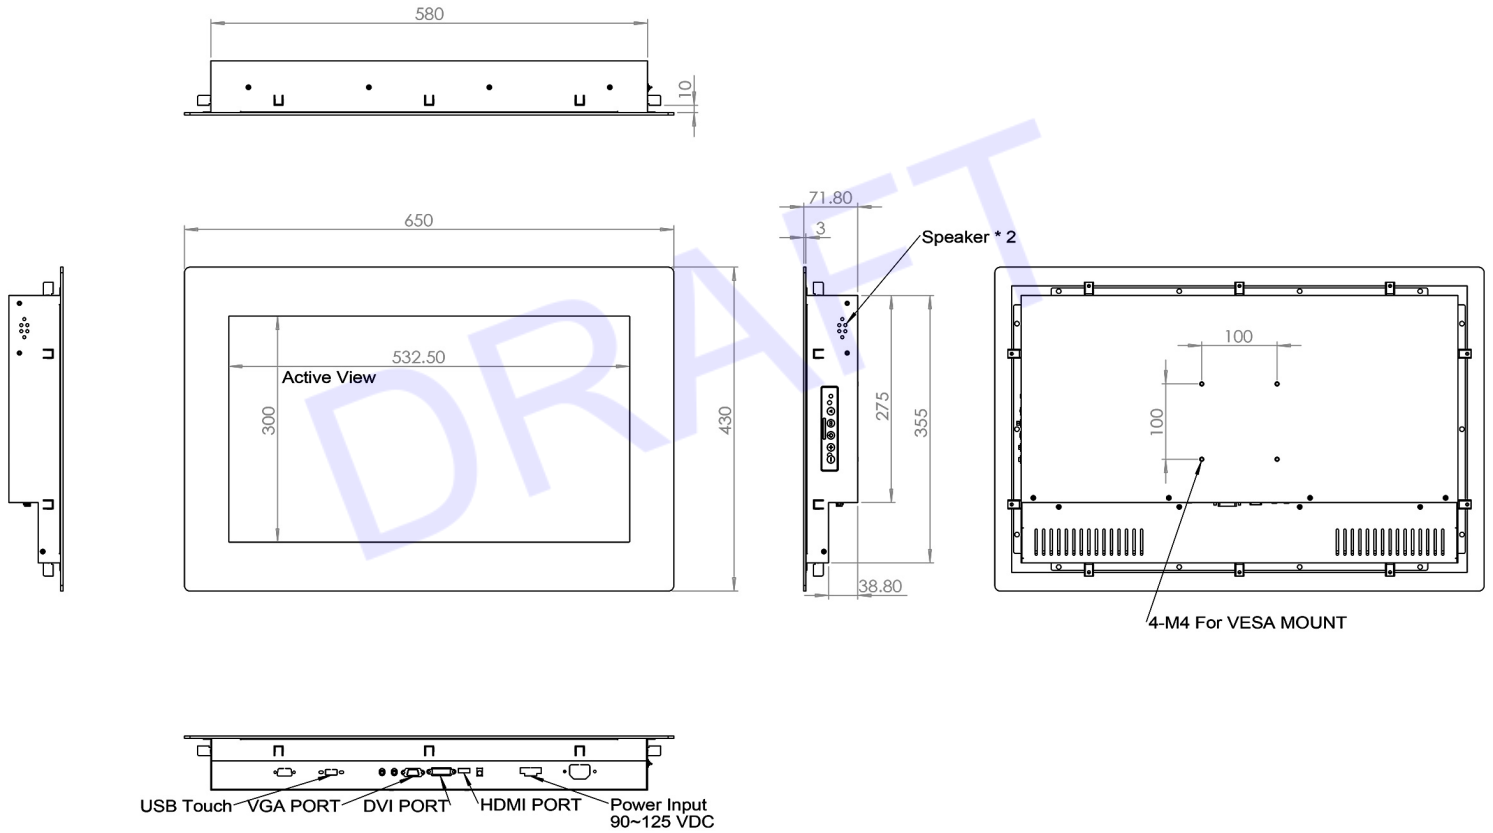

Drawing No.: CPMW2400IP-TR-125DC-10142022-V1

LCD OPTIONS:



LED Backlight Options

Introducing LED backlight options for monitors for energy efficiency and a brighter screen.



TouchScreen Options

Our LCD has a wide selection option to choose which touchscreen technology suits for you.

| | Four-Wire Resistive | Five-Wire Resistive | Pen Touch | Capacitive | Surface Wave(Saw) | Infrared Touch (Ir) |
|-------------------------------|--|--|--|--|--|--|
| PRODUCT SIZE | 1.7" - 24" | 10.4" - 24" | 15" - 19" | 12" - 24" | 10.4" - 30" | 10.4" - 42" |
| TOUCH LIFE | 1 - 2 million touches | 30 - 35million touches | 100 million touches | 100 million touches | 50 million touches | Long-term reliability |
| SCRATCH RESISTANCE | Hard Coated | Hard Coated | Hard Coated (SiO ²) | Hard Coated (SiO ²) | Glass Overlay Moh's hardness rating of 7 | Glass Overlay Moh's hardness rating of 7 |
| CONTAMINANT RESISTANCE | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers |
| INPUT METHOD | Finger, Gloved Hand, Stylus | Finger, Gloved Hand, Stylus | Stylus Pen | Finger | Finger, Gloved Hand, Soft pliable stylus | Finger, Gloved Hand, Stylus |
| CONTROLLER | USB, RS232 | USB, RS232 | USB, RS232 | USB, RS232 | USB, RS232 | USB, RS232 |



VIDEO Input Options:

For Video inputs options:

DVI, DVI+HDMI, SVideo+AV, SVideo+AV+DVI, AV+Looping, DVI+AV+Looping, HD-SDI, BNC(PAL/NTSC)



Optical Bonding Options

- Optical Bonding provides the best reduction of ambient light washout of any commercially available enhancement technology.
- Optical Bonding has a lower cost than most other competing technologies.
- Optical Bonding offers superior ruggedization, enhancing the display durability under vibration, shock and other environmental extremes.




RS-232 Remote Control Options

Remote Control Protocol: Command Code to set system



9-36V DC Input Options

iTech offers a selection of DC input from 9V to 36V



Light Sensor and Motion Sensor Options

iTech LCD offers Light and Motion Sensor

Privacy Filter

Front Glass Options:

- Anti Reflective AR Glass 3mm
- Anti Reflective AR Glass 6mm Vandal-Resistance
- Anti Reflective AR Glass 8mm Vandal-Resistance
- Anti Glare AG Glass 3mm