

# RACKMOUNT LCD DISPLAY

Rack Mount LCD display, 17"-1280x1024, LED-350nits  
 VGA+DVI+HDMI signal input ports  
 5 wires resistive touch, USB interface  
 OEM Drawing in 8U height with OSD & VR-Knob on front bezel  
 VR-Knob for brightness from 0~100%  
 Without handles and fitting with 19" rack mount frame  
 Built-in Power system with 110/220VAC input

**MODEL: DRP817-TR-KN**



## FEATURES:

- Modularize mechanical design provides flexible product configuration and easy maintenance
- Optional build-in touch screen for interactive application
- Available with auto-brightness sensor offers application in day and night
- VGA connector with optional AV,SV,AV-Looping
- Complete custom design/solution for OEM customers

## SPECIFICATION:



|                            |   |  |
|----------------------------|---|--|
| <b>Panel</b>               | Cell Type / Glass Surface   | TFT LCD / Black Anti-Glare, low reflection coating         |
|                            | Aspect Ratio / Size   | 4 : 3 / 17" viewable diagonal area                         |
|                            | Active Area / Pixel Pitch   | 339.2(H) x 271.6(V) mm / 0.264(H) x 0.264(V) mm            |
|                            | Native Resolution / Colors  | 1280(H) x 1024(V) / 16.7 M                                 |
|                            | Brightness / Contrast   | 350 cd/m <sup>2</sup> (typ) / 1000 : 1                     |
|                            | Response Time   | < 5 ms   |
|                            | Viewing Angle (typical)   | H. 170° (- 85° ~ + 85°) , V. 160° (- 80° ~ + 80°)          |
|                            | Light Source  | LED backlight, Long life, 35,000 hrs (typ)                 |
| <b>Input Sources</b>       | VGA+DVI+HDMI  |  |
| <b>Audio System</b>        | Optional for Speakers   |  |
| <b>Convenient Features</b> | Auto Calibration , Back Light Adjustment , Plug&Play (VESA DDC/CI, DDC 2B)        |  |
|                            | OSD Multi-Languages , Wall Mount Ready (VESA Dimension - please refer to Drawing) |  |
| <b>Power</b>               | Built-in Power system with 110/220VAC input                                       |  |
| <b>Power Consumption</b>   | Operation / Power Saving  | 33 watt , < 2 watt (Support DPMS)                          |
| <b>Operating Condition</b> | Temperature / Humidity  | -30°C ~ 80°C (-22°F ~ 176°F) , 10% ~ 90% (no condensation) |
| <b>Storage Condition</b>   | Temperature / Humidity  | -30°C ~ 80°C (-22°F ~ 176°F) , 10% ~ 90% (no condensation) |
| <b>Certification</b>       | FCC , CE  |  |
| <b>Dimensions</b>          | Physical  | Please refer to Drawing                                    |
|                            | Carton  | W x H x D = TBD  |
| <b>Weight</b>              | N.W. / G.W.   | 5 Kgs / 6 Kgs  |
| <b>Container Loaded</b>    | 20ft / 40ft / 40ft HQ   | TBD (Sets , By pallet)                                     |

|                |                  |                      |                          |                              |
|----------------|------------------|----------------------|--------------------------|------------------------------|
| <b>Options</b> | Touch            | Video / TV           | Enhanced Panel           | Others                       |
|                | Resistive touch  | SV + AV              | Panel with LED backlight | Digital Signage(Stand alone) |
|                | Capacitive touch | SV + AV + AV_Looping | High brightness panel    | Networking Digital Signage   |
|                | SAW touch        | SV + AV + TV         | Wide Temperature         | Motion Sensor                |
|                | Infrared touch   |                      | Sunlight Readable        | Light Sensor                 |
|                | Protected glass  |                      |                          | Auto-Dimming                 |

*\*Specifications subject to change without notice, not responsible for typographical errors.*

# MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

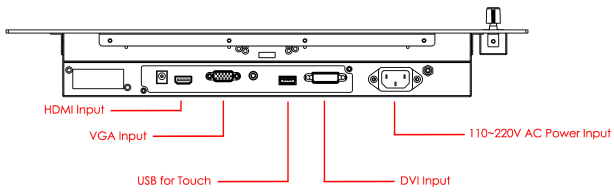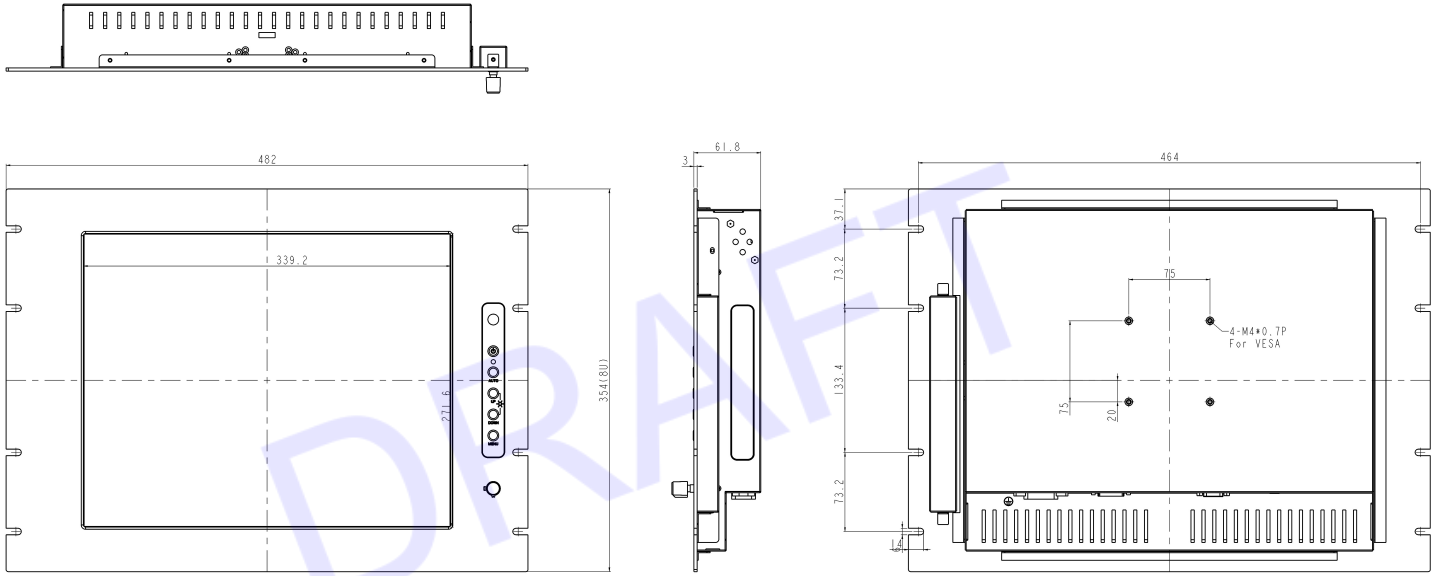

Drawing No.: DRP817-TR-KN-04152024-V1

