


## Chassis Mount 12.1" Wide LCD Monitor 1280x800, LED-350nits, CF / SD / USB Plug and Play

Model: EDDW1210



### FEATURES:

- Digital Signage LCD Frame
- Commercial Grade LCD with Metal housing
- CF / SD / USB Plug and Play
- High Definition Resolution 1280 x 800
- HD output 1080P
- LED backlit
- Play Video/Photo/Music
- JPG,MP3,MPG1/2/4,AVI ,DIVX
- Wide Viewing angle
- Auto-Play, Auto-repeat
- Support Timer to programming power on/off
- Support play list to specify files to play
- Support Programmable Photo Slide Timing
- Support Disconnection Memory to continuously play where it break
- Power Resume : Continue play the content from break point after power recover
- Power on password Setting
- Photo Rotation
- Full Function Remote Control
- Built in Speakers
- Optional High brightness 1000nits
- Optional Motion Sensors and Dimming Sensors
- Optional 6mm Vandal Proof Safety Glass
- Optional Stainless steel Front Bezel
- Optional Anti-Reflective AR 3mm Front Glass for protection

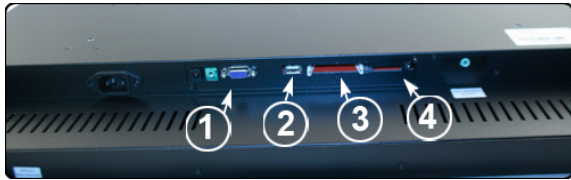

1. VGA Output Port
2. USB Plugin
3. CF Plugin
4. SD Card Plugin




### Plug-n-Play Solution

### Custom Digital Signage In 3 Easy Steps!

No Internet Connection Required.



1. Save image or video file to USB



2. Plug USB/CF/ SD Card into player



3. Play on screen!



Metal Chassis/Housing for higher Impact protection. (Optional for Front AR Glass or Vandal Resistant glass)

Built In Speakers

Side OSD buttons can prevent unnecessary setting changes.

Auto Video Signal ON / OFF  
Auto Always Power On

## LCD SPECIFICATIONS:


<b>Panel</b>	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating	
	Aspect Ratio / Size	Wide / 12" viewable diagonal area	
	Active Area / Pixel Pitch	261.1(H) x 163.2(V) mm / 0.204(H) x 0.204(V) mm	
	Native Resolution / Colors	1280(H) x 800(V) / 262 K	
	Brightness / Contrast	350 cd/m <sup>2</sup> (typ) / 350 : 1	
	Response Time	≤ 15 ms	
	Viewing Angle (typical)	H. 130o (- 65o ~ + 65o) , V. 115o(- 60o ~ + 55o)	
	Light Source	LED backlight, Long life, 35,000 hrs (typ)	
<b>Power</b>	Internal power supply with	universal / Auto-Sensing, AC 90 to 260V, 50 / 60 Hz	
<b>Power Consumption</b>	Operation / Power Saving	18 watt , < 1 watt (Support DPMS)	
<b>Operating Condition</b>	Temperature / Humidity	0°C ~ 50°C (32°F ~ 122°F) , 10% ~ 90% (no condensation)	
<b>Storage Condition</b>	Temperature / Humidity	- 20°C ~ 60°C (- 4°F ~ 140°F) , 10% ~ 90% (no condensation)	
<b>Certification</b>		FCC , CE	
<b>Dimensions</b>	Physical	W x H x D = 314.7 x 214.7 x 57 mm	
	Carton	W x H x D = TBD	
<b>Weight</b>	N.W. / G.W.	3.0 Kgs / 4.0 Kgs	
<b>Container Loaded</b>	20ft / 40ft / 40ft HQ	TBD (Sets , By pallet)	

<b>Options</b>	<i>Touch</i>	<i>Video/TV</i>	<i>Enhanced Panel</i>	<i>Others</i>
	Resistive touch	SV + AV	Panel with LED backlight	Digital Signage(Stand alone)
	Capacitive touch	SV + AV + AV_Looping	High brightness panel	Networking Digital Signage
	SAW touch	SV + AV + TV	Wide Temperature	Motion Sensor
	Infrared touch		Sunlight Readable	Light Sensor
	Protected glass			Auto-Dimming


## MEDIA PLAYER SPECIFICATIONS:

<b>Video Function</b>	MPEG-1 video playback
	MPEG-2 video playback
	MPEG-4 at full screen D1 video playback
	AVI
	<b>Video Bandwidth -ASF simple profile 320 x 240 video</b>
<b>Photo Function</b>	Motion JPEG playback
	JPEG photo playback
	Progressive JPEG photo playback
	<b>Photo Bandwidth -</b>
	<b>Motion JPEG Maximum 10 fps</b>
<b>Audio Function</b>	<b>JPEG minimum 16x16 pixels, Maximum 5120x3840 pixels</b>
	MP3 music playback
	DIVX
	WMA music playback
	AAC audio decode and playback
<b>Media Card Supported</b>	<b>Audio bandwidth - MP3 minimum 32Kbps, Maximum 256Kbps</b>
	CF / SD / USB
<b>Convenient Features (By Remote Controller)</b>	Auto-Play, Auto-repeat
	Support Timer to programming power on/off
	Support play list to specify files to play
	Support calendar
	Support Disconnection Memory to continuously play where it break
	Support auto copy content from USB disk to CF card with password
	Play/Pause , Stop
	Page up , Page Down
	Photo Zoom In/Out
	Photo Rotation
	Programmable Photo Slide Timing

## Picture Mode to Display

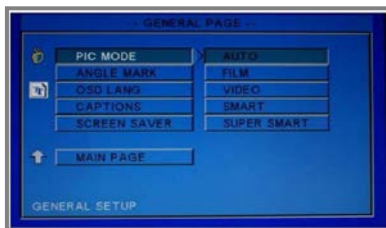

## Play list setting

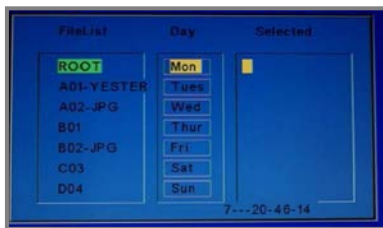

## Preferences Setting








## Time and Date



## Timer setting to weekly turn on/off power



## MECHANICAL DRAWINGS:

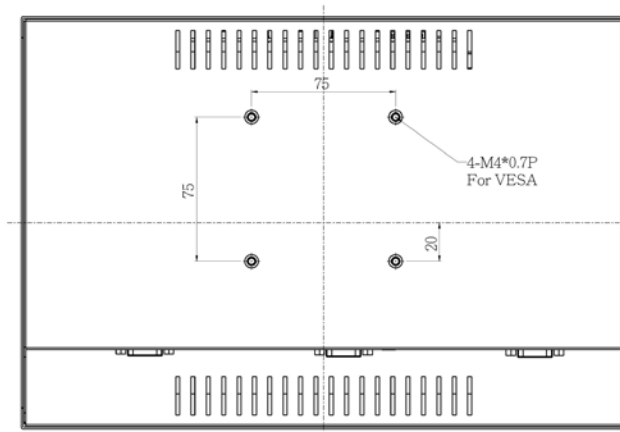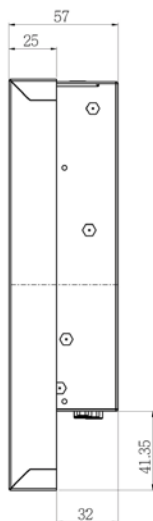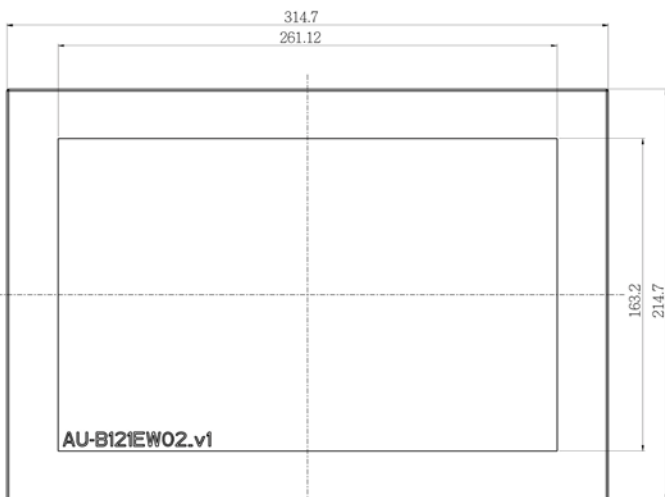

*"These I/O are for references only, the actual power and video input might vary"*



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@iTechLCD.com](mailto:info@iTechLCD.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)

"These high-definition LED Displays are simple to use and are purpose built for commercial environments"