

# Model: ECHW2200-SW

Chassis, 22" LCD monitor, 1680x1050,  
LED 250 nits, VGA input with SAW  
Touch

**ECH Series:** Industrial Chassis Wall/Surface Mount Metal Housing LCD Monitor  
(Optional Integrated Touch Screen/PC/ DC Input/Front NEMA4x/Front Stainless steel bezel and more...)

## Feature Highlights:




Metal Chassis/Housing for higher Impact protection.  
(Optional for Front AR Glass or Vandal Resistant glass)

Built-in speaker built-in speakers that allow the convenience  
Audio output.

Side OSD buttons can prevent unnecessary setting  
changes.

Above 24" LCD will include Front IR Sensor and Remote  
controller.

Auto Video Signal ON / OFF  
Auto Always Power On

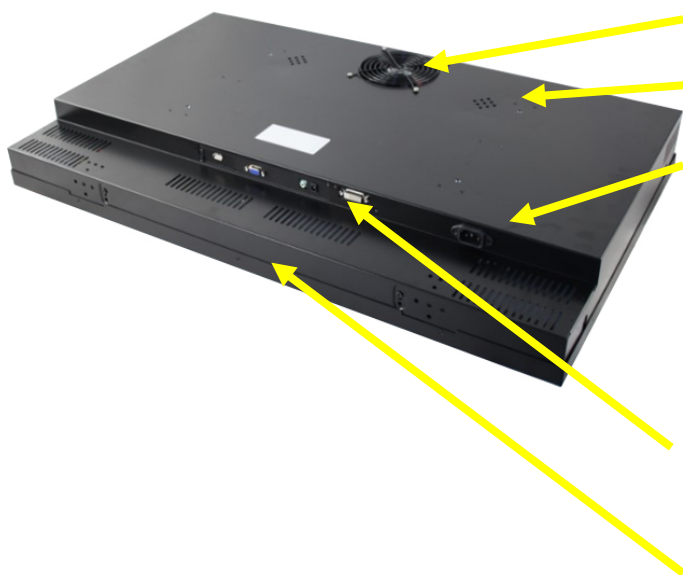

Ultra low speed/Noise fan for extra cooling  
(24" LCD or above)

VESA Mounting Hole Pattern

Reliable built-in Power supply for 15" or above  
(Optional for 9-36V DC input)



Standard VGA Input  
(Optional for DVI, HDMI, AV, BNC, AV looping and SDI)

Optional for RS232 Remote Control Protocol: Command  
Code to set system

## Model: ECHW2200



## Features:


- Modularize mechanical design provides flexible product configuration and easy maintenance
- Optional build-in touch screen for interactive application
- Available with auto-brightness sensor offers application in day and night
- VGA connector with optional AV,SV,AV-Looping
- Complete custom design/solution for OEM customers.

## Specification:

|                     |  |   |   |
|---------------------|--|---|---|
| Panel               | Cell Type / Glass Surface  | TFT LCD / Black Anti-Glare, low reflection coating          |   |
|                     | Aspect Ratio / Size  | Wide / 22" viewable diagonal area                           |   |
|                     | Active Area / Pixel Pitch  | 473.8(H) x 296.1(V) mm / 0.282(H) x 0.282(V) mm             |   |
|                     | Native Resolution / Colors   | 1680(H) x 1050(V) / 16.7M                                   |   |
|                     | Brightness / Contrast  | 250 cd/m <sup>2</sup> (typ) / 1000 : 1                      |   |
|                     | Response Time  | ≤ 5 ms  |   |
|                     | Viewing Angle (typical)  | H.170° (- 85o ~ + 85o) , V. 160o(- 80o ~ + 80o)             |   |
|                     | Light Source   | LED backlight, Long life, 35,000 hrs (typ)                  |   |
| Input Sources       | PC System  | Signal  | Analog RGB (0.7/1.0 V <sub>p-p</sub> , 75 ohms)         |
|                     |  | Sync  | Separate Sync, Composite Sync, Sync On Green            |
|                     |  | Frequency   | F <sub>h</sub> : 30 - 82Khz , F <sub>v</sub> : 50 -75Hz |
|                     | Audio System   | 2W speaker x 2  |   |
| Input Terminals     | 1 x VGA (15 Pin Female D-Sub) , 1 x PC Audio (Stereo Headphone Jack) , 1 x DC Power Plug |   |   |
| Convenient Features | Auto Calibration , Back Light Adjustment , Plug&Play (VESA DDC/CI, DDC 2B)               |   |   |
|                     | OSD Multi-Languages , Wall Mount Ready (VESA Dimension - please refer to Drawing)        |   |   |
| Power               | Internal power supply with universal / Auto-Sensing, AC90 to 260V, 50/60 Hz              |   |   |
| Power Consumption   | Operation / Power Saving   | 24.7 watt , < 1 watt (Support DPMS)                         |   |
| Operating Condition | Temperature / Humidity   | 0°C ~ 50°C (32°F ~ 122°F) , 10% ~ 90% (no condensation)     |   |
| Storage Condition   | Temperature / Humidity   | - 20°C ~ 60°C (- 4°F ~ 140°F) , 10% ~ 90% (no condensation) |   |
| Certification       |  | FCC , CE  |   |
| Dimensions          | Physical   | Please refer to Drawing                                     |   |
|                     | Carton   | W x H x D = TBD   |   |
| Weight              | N.W. / G.W.  | 9 Kgs / 10.5 Kgs  |   |
| Container Loaded    | 20ft / 40ft / 40ft HQ  | TBD (Sets , By pallet)                                      |   |

| Options | Touch            | Video/TV             | Enhanced Panel           | Others                       |
|---------|------------------|----------------------|--------------------------|------------------------------|
|         | Resistive touch  | SV + AV              | Panel with LED backlight | Digital Signage(Stand alone) |
|         | Capacitive touch | SV + AV + AV Looping | High brightness panel    | Networking Digital Signage   |
|         | SAW touch        | SV + AV + TV         | Wide Temperature         | Motion Sensor                |
|         | Infrared touch   |                      | Sunlight Readable        | Light Sensor                 |
|         | Protected glass  |                      |                          | Auto-Dimming                 |

## Mechanical Drawing:

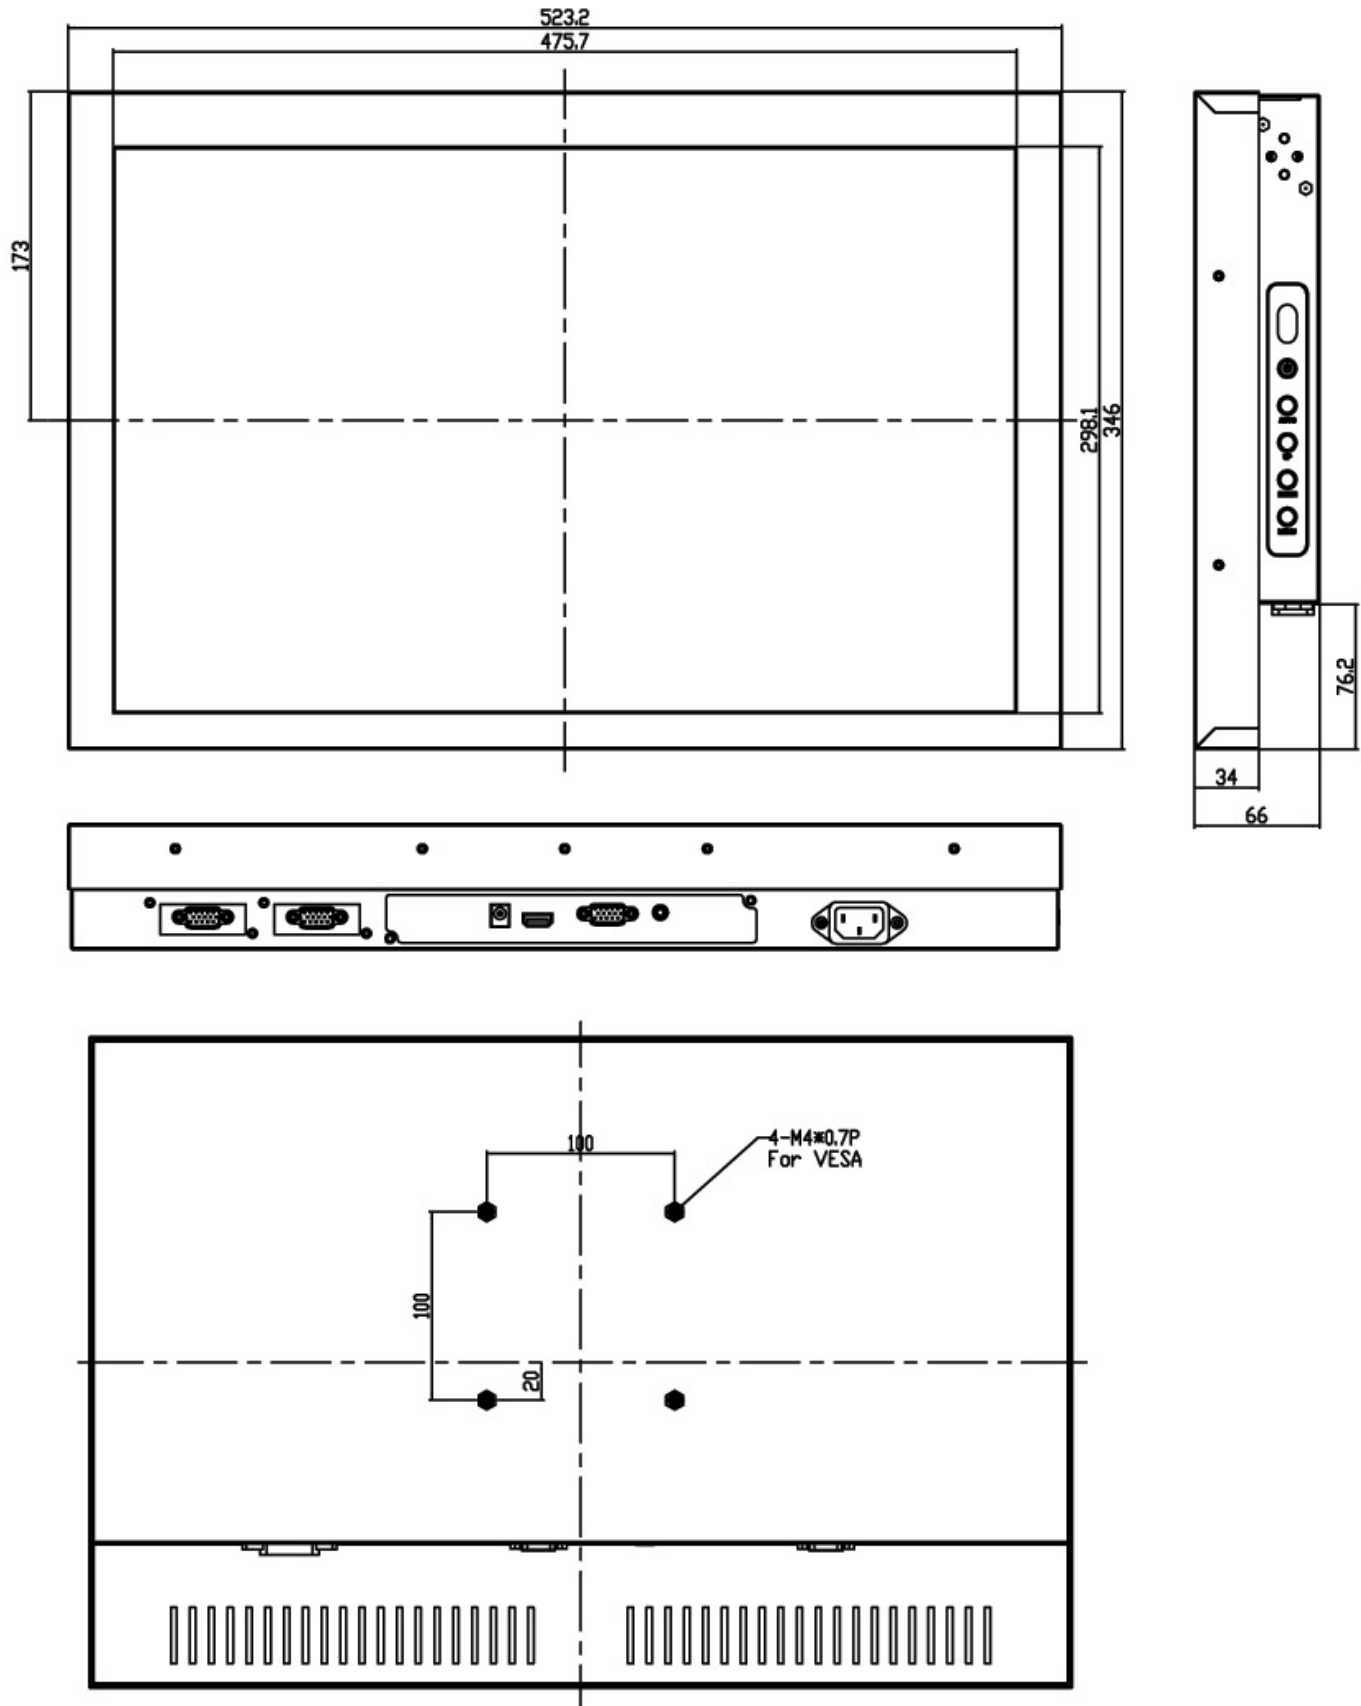


## LCD Options:



### LED Backlight Options

Introducing LED backlight options for monitors for energy efficiency and a brighter screen.



### TouchScreen Options

Our LCD has a wide selection option to choose which touchscreen technology suits for you.

|                        | Four-Wire Resistive  | Five-Wire Resistive  | Pen Touch  | Capacitive   | Surface Wave(Saw)  | Infrared Touch (Ir)  |
|------------------------|--|--|--|--|--|--|
| PRODUCT SIZE           | 1.7" - 24"   | 10.4" - 24"  | 15" - 19"  | 12" - 24"  | 10.4" - 30"  | 10.4" - 42"  |
| TOUCH LIFE             | 1 - 2 million touches  | 30 - 35million touches   | 100 million touches  | 100 million touches  | 50 million touches   | Long-term reliability  |
| SCRATCH RESISTANCE     | Hard Coated  | Hard Coated  | Hard Coated (SiO <sub>2</sub> )  | Hard Coated (SiO <sub>2</sub> )  | Glass Overlay<br>Moh's hardness rating of 7                                | Glass Overlay<br>Moh's hardness rating of 7                                |
| CONTAMINANT RESISTANCE | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers |
| INPUT METHOD           | Finger, Gloved Hand, Stylus  | Finger, Gloved Hand, Stylus  | Stylus Pen   | Finger   | Finger, Gloved Hand, Soft pliable stylus                                   | Finger, Gloved Hand, Stylus  |
| CONTROLLER             | USB, RS232   | USB, RS232   | USB, RS232   | USB, RS232   | USB, RS232   | USB, RS232   |



### VIDEO Input Options:


For Video inputs options:

DVI, DVI+HDMI, SVideo+AV, SVideo+AV+DVI, AV+Looping, DVI+AV+Looping, HD-SDI, BNC(PAL/NTSC)



### Optical Bonding Options

- Optical Bonding provides the best reduction of ambient light washout of any commercially available enhancement technology.
- Optical Bonding has a lower cost than most other competing technologies.
- Optical Bonding offers superior ruggedization, enhancing the display durability under vibration, shock and other environmental extremes.




### RS-232 Remote Control Options

**Remote Control Protocol: Command Code to set system**



### 9-36V DC Input Options

iTech offers a selection of DC input from 9V to 36V



### Light Sensor and Motion Sensor Options

iTech LCD offers Light and Motion Sensor

### Privacy Filter

Front Glass Options:

- Anti Reflective AR Glass 3mm
- Anti Reflective AR Glass 6mm Vandal-Resistance
- Anti Reflective AR Glass 8mm Vandal-Resistance
- Anti Glare AG Glass 3mm



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@itechlcd.com](mailto:info@itechlcd.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)