




## Model: EOPW5000-3D

Open Frame Metal Housing , 50" LCD monitor, 1920 x 1080, 350 nits/ 3000:1 , VGA+DVI+HDMI, Side OSD, Active Shutter 3D

**EOP Series:** EOP Series: Industrial Open Frame Metal Housing LCD Monitor (Optional for High Brightness and LED backlight)

### Features highlights:

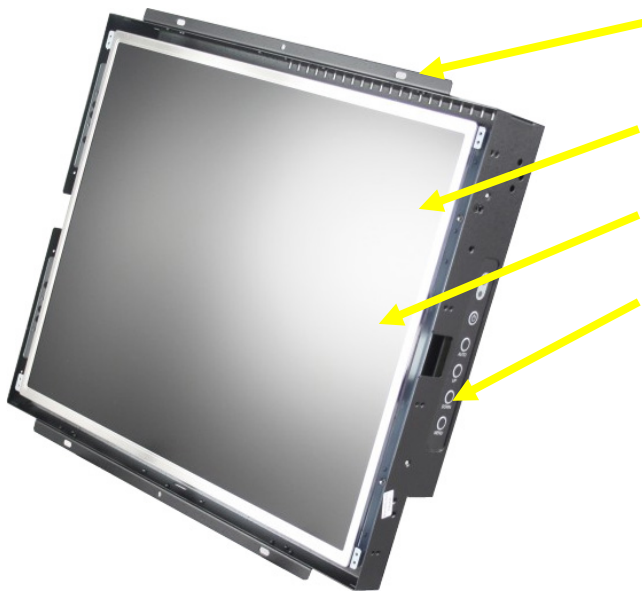

Easy to Mount Open Frame, metal chassis (top & bottom flanges)

Optional for Resistive/ Capacitive/ SAW/ IR/ Projective Capacitive Touch screen

Auto Video Signal ON / OFF  
Auto Always Power On

Side OSD buttons can prevent unnecessary setting changes.



Ultra low speed/Noise fan for extra cooling (24" LCD or above)

VESA Mounting Hole Pattern

Reliable built-in Power supply for 15" or above (Optional for 9-36V DC input)



Standard VGA Input (Optional for DVI, HDMI, AV, BNC, AV looping and SDI)

Optional for RS232 Remote Control Protocol: Command Code to set system

## Features:


- Modular mechanism design provides flexible product configuration and easy maintenance.
- Available with auto-brightness sensor offers application in day and night.
- Optional to built-in touch screen for interactive application.
- Active Shutter 3D
- Complete custom design/solution for OEM customers

## Specification:

|                            |  |   |   |
|----------------------------|--|---|---|
| <b>Panel</b>               | Cell Type / Glass Surface  | TFT LCD / Black Anti-Glare, low reflection coating          |   |
|                            | Aspect Ratio / Size  | Wide / 50" viewable diagonal area                           |   |
|                            | Active Area / Pixel Pitch  | 1103(H) x 622.4(V) mm / 0.57(H) x 0.57(V) mm                |   |
|                            | Native Resolution / Colors   | 1920(H) x 1080(V) / 16.7Million                             |   |
|                            | Brightness / Contrast  | 350 cd/m <sup>2</sup> (typ) / 3000 : 1                      |   |
|                            | Response Time  | ≤ 8 ms  |   |
|                            | Viewing Angle (typical)  | H. 176o (- 88o ~ + 88o) , V. 176o(- 88o ~ + 88o)            |   |
|                            | Light Source   | LED backlight, Long life, 35,000 hrs (typ)                  |   |
| <b>Input Sources</b>       | PC System  | Signal  | Analog RGB (0.7/1.0 V <sub>p-p</sub> , 75 ohms)         |
|                            |  | Sync  | Separate Sync, Composite Sync, Sync On Green            |
|                            |  | Frequency   | F <sub>h</sub> : 30 - 82Khz , F <sub>v</sub> : 50 -75Hz |
|                            | Audio System   | 2W speaker x 2  |   |
| <b>Input Terminals</b>     | 1 x HDMI, 1 x PC Audio (Stereo Headphone Jack) , 1 x DC Power Plug             |   |   |
| <b>Convenient Features</b> | Auto Calibration , Back Light Adjustment , Plug&Play (VESA DDC/CI, DDC 2B)     |   |   |
|                            | OSD Multi-Languages , Wall Mount Ready (VESA 75 x 75 mm)                       |   |   |
| <b>Power</b>               | Internal power supply with universal / Auto-Sensing, AC 90 to 260V, 50 / 60 Hz |   |   |
| <b>Power Consumption</b>   | Operation / Power Saving   | 120 watt , < 2 watt (Support DPMS)                          |   |
| <b>Operating Condition</b> | Temperature / Humidity   | 0°C ~ 50°C (32°F ~ 122°F) , 10% ~ 90% (no condensation)     |   |
| <b>Storage Condition</b>   | Temperature / Humidity   | - 20°C ~ 60°C (- 4°F ~ 140°F) , 10% ~ 90% (no condensation) |   |
| <b>Certification</b>       |  | FCC , CE  |   |
| <b>Dimensions</b>          | Physical   | With Flanges : W x H x D = 1218.4 x 745 x 136.3 mm          |   |
|                            |  | Without Flanges : W x H x D = 1168.4 x 695 x 136.3 mm       |   |
|                            | Carton   | W x H x D = TBD   |   |
| <b>Weight</b>              | N.W. / G.W.  | 43.5 Kgs / 46.5 Kgs   |   |
| <b>Container Loaded</b>    | 20ft / 40ft / 40ft HQ  | TBD (Sets , By pallet)                                      |   |

| <b>Options</b> | Touch            | Video / TV           | Enhanced Panel           | Others                       |
|----------------|------------------|----------------------|--------------------------|------------------------------|
|                | Resistive touch  | SV + AV              | Panel with LED backlight | Digital Signage(Stand alone) |
|                | Capacitive touch | SV + AV + AV Looping | High brightness panel    | Networking Digital Signage   |
|                | SAW touch        | SV + AV + TV         | Wide Temperature         | Motion Sensor                |
|                | Infrared touch   |                      | Sunlight Readable        | Light Sensor                 |
|                | Protected glass  |                      |                          | Auto-Dimming                 |

# Mechanical Drawing:

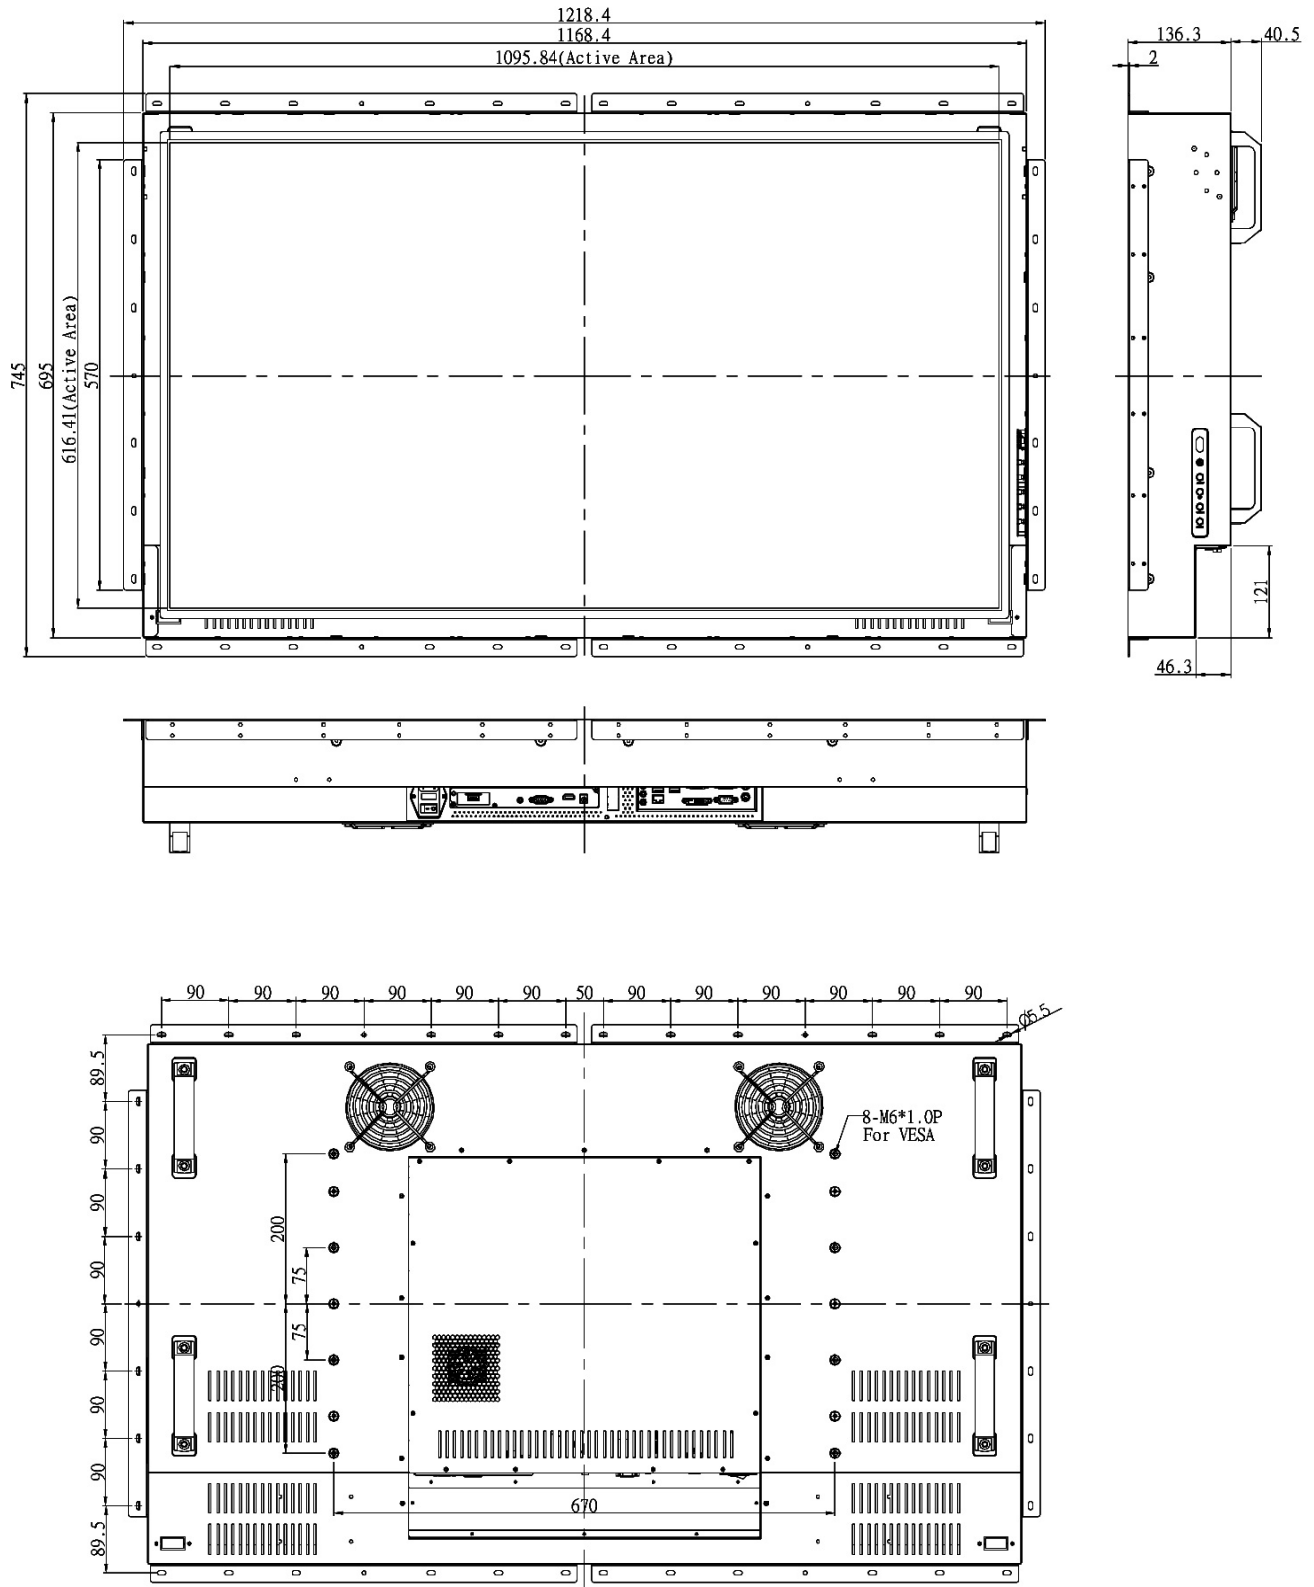

## LCD Options:



### LED Backlight Options

Introducing LED backlight options for monitors for energy efficiency and a brighter screen.



### TouchScreen Options

Our LCD has a wide selection option to choose which touchscreen technology suits for you.

|                               | Four-Wire Resistive  | Five-Wire Resistive  | Pen Touch  | Capacitive   | Surface Wave(Saw)  | Infrared Touch (Ir)  |
|-------------------------------|--|--|--|--|--|--|
| <b>PRODUCT SIZE</b>           | 1.7" - 24"   | 10.4" - 24"  | 15" - 19"  | 12" - 24"  | 10.4" - 30"  | 10.4" - 42"  |
| <b>TOUCH LIFE</b>             | 1 - 2 million touches  | 30 - 35million touches   | 100 million touches  | 100 million touches  | 50 million touches   | Long-term reliability  |
| <b>SCRATCH RESISTANCE</b>     | Hard Coated  | Hard Coated  | Hard Coated (SiO <sub>2</sub> )  | Hard Coated (SiO <sub>2</sub> )  | Glass Overlay<br>Moh's hardness rating of 7                                | Glass Overlay<br>Moh's hardness rating of 7                                |
| <b>CONTAMINANT RESISTANCE</b> | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers | Resists moisture, dirt, vinegar, ammonia based food products and cleansers |
| <b>INPUT METHOD</b>           | Finger, Gloved Hand, Stylus  | Finger, Gloved Hand, Stylus  | Stylus Pen   | Finger   | Finger, Gloved Hand, Soft pliable stylus                                   | Finger, Gloved Hand, Stylus  |
| <b>CONTROLLER</b>             | USB, RS232   | USB, RS232   | USB, RS232   | USB, RS232   | USB, RS232   | USB, RS232   |



### VIDEO Input Options:

For Video inputs options:

DVI, DVI+HDMI, SVideo+AV, SVideo+AV+DVI, AV+Looping, DVI+AV+Looping, HD-SDI, BNC(PAL/NTSC)



### Optical Bonding Options

- Optical Bonding provides the best reduction of ambient light washout of any commercially available enhancement technology.
- Optical Bonding has a lower cost than most other competing technologies.
- Optical Bonding offers superior ruggedization, enhancing the display durability under vibration, shock and other environmental extremes.




### RS-232 Remote Control Options

**Remote Control Protocol: Command Code to set system**



### 9-36V DC Input Options

iTech offers a selection of DC input from 9V to 36V



### Light Sensor and Motion Sensor Options

iTech LCD offers Light and Motion Sensor

### Privacy Filter

Front Glass Options:

- Anti Reflective AR Glass 3mm
- Anti Reflective AR Glass 6mm Vandal-Resistance
- Anti Reflective AR Glass 8mm Vandal-Resistance
- Anti Glare AG Glass 3mm



i-Tech Company LLC

TOLL FREE: (888) 483-2418 • EMAIL: [info@itechlcd.com](mailto:info@itechlcd.com) • WEB: [www.iTechLCD.com](http://www.iTechLCD.com)