

Model: EMC1500-i5

Panel PC IP65 Front 15" LCD Monitor, Intel® Core™ H61 i5-2390T Processor 3.5 GHz



Features:

- 15" LCD panel, 1024 x 768, 250 nits
- Intel® Core™ i5 Processor
- Intel® QM57
- 2 x DDR3 SO-DIMM Up to 8GB 800/1066 MHz SDRAM
- 1 x VGA, 1 x DVI, 6 x USB, 2 x COM, 2 x LAN
- 1 x PS2, Mic-in, Line-in, Line-out




Specification:

Panel	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating
	Aspec Ratio / Size	4 : 3 / 15" viewable diagonal area
	Active Area / Pixel Pitch	304.13(H) x 228.10(V) mm / 0.297(H) x 0.297(V) mm
	Native Resolution / Color	1024(H) x 768(V) / 16.2 Million
	Brighness / Contrast	250 cd/m ² (typ) / 700 : 1
	Response Time	≤ 35 ms
	Viewing Angle (Typical)	H. 140° (- 70° ~ + 70°) , V. 120°(- 60° ~ + 60°)
	Light Source	LED, Long life, 35,000 hrs (typ)
System	CPU	Intel® Core™ i5 Processor; FSB 1066MHz
	BIOS	AMI
	System / Graphic Chipset	Intel® QM57 / HD Graphics Integrated
	System Memory	2 x DDR3 SO-DIMM Up to 8GB 800/1066 MHz SDRAM
	HDD	6 x SATA
	I/O Ports	1 x VGA, 1 x DVI
		6 x USB
		2 x COM
2 x LAN		
	1x(K/B and Mouse)	
	Mic-in, Line-in, Line-out	
Expension	1 x Mini PCI-e	
Power	Power Input	24V DC-IN (4-Din Connector)
	Power Consumption	60 Watt, <1 Watt
Environmental	Operating Temperature	-5°C~60°C (23°F~140°F)
	Operating Humidity	0%~95%(non-condensing)

Options	Touch	Enhanced Pane	Other	
	Resistive(With Glass)	High Brightness Panel	WiFi	Networking Digital Signage
Capacitive	Panel-LED Backlight	3G	Web Cam	
SAW	Wide Temperature	Bluetooth	Motion Sensor	
	Wide Viewing Angle	RFID	Auto LightSensor	
	Sunlight Readable		Auto-Dimming	

Photo Gallery:

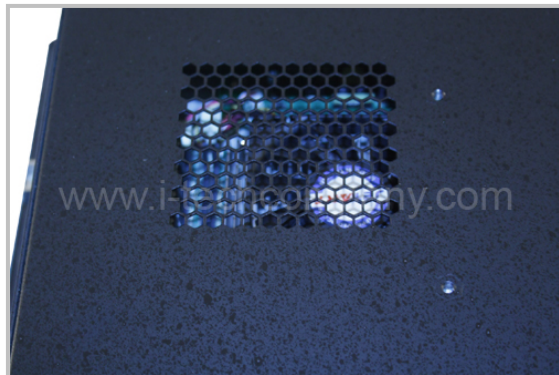

Mechanical Drawing:

