



Zero Bezel Panel Mount, 15" LCD Monitor  
1024 x 768, LED 350 nits, VGA input, Wide View  
Angle and Wide Temperature

**Model: EPM1500WTWV-J-F**



## FEATURES:



- Modularize mechanical design provides flexible product configuration and easy maintenance
- Optional build-in touch screen for interactive application
- Intel® Celeron J1900
- Intel® Atom BayTrail
- Dual Channel DDR3 1333 MHz SDRAM, Max up to 8GB
- 1 x VGA, 1 x HDMI, 3 x COM, 2 x LAN, 2 x USB 2.0, 2 x USB 3.0

## SPECIFICATIONS:




<b>Panel</b>	Cell Type / Glass Surface	TFT LCD
	Aspect Ratio / Size	4 : 3 / 15" viewable diagonal area
	Active Area / Pixel Pitch	304.13(H) x 228.10(V) mm / 0.297(H) x 0.297(V) mm
	Native Resolution / Colors	1024(H) x 768(V) / 16.2 M
	Brightness / Contrast	350 cd/m <sup>2</sup> (typ) / 1500 : 1
	Response Time	< 35 ms
	Viewing Angle (typical)	H. 170° (- 85° ~ + 85°) , V. 170° (- 85° ~ + 85°)
	Light Source	LED backlight, Long life, 35,000 hrs (typ)
<b>System</b>	CPU	Intel® Celeron J1900 Processor
	BIOS	UEFI
	System / Graphic Chipset	Intel® Gen7 Intel Graphics DX 11*, OGL3.2
	System Memory	Dual Channel DDR3 1333 MHz SDRAM, Max up to 8GB
	HDD	2 x SATA
	I/O port	1 x VGA, 1 x HDMI
		2 x USB 2.0, 2 x USB 3.0
		3 x COM (RS232/422/485)
Expansion	2 x LAN, Mic-in, Line-out	
<b>Power</b>	Expansion	1 x Mini PCI-e
	Power Input	12V DC input with adapter
	Power Consumption	30 Watt, <1 Watt
<b>Operating Condition</b>	Temperature / Humidity	-15°C ~ 65°C (5°F ~ 149°F) , 10% ~ 90% (no condensation)
<b>Dimensions</b>	Physical	Please refer to Drawing
	Carton	W x H x D = TBD

Options	Touch	Video / TV	Enhanced Panel	Others
	Projected Capacitive	SV + AV	Panel with LED backlight	Digital Signage(Stand alone)
	Protected glass	SV + AV + AV_Looping	High brightness panel	Networking Digital Signage
		SV + AV + TV	Wide Temperature	Motion Sensor
			Sunlight Readable	Light Sensor
				Auto-Dimming

MECHANICAL DRAWING:

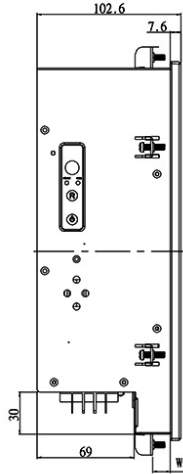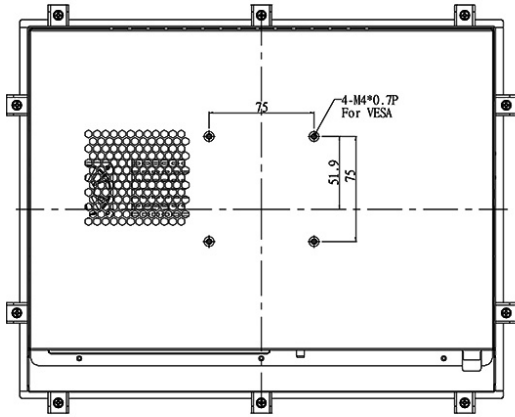

Wall Max Depth is 12mm.

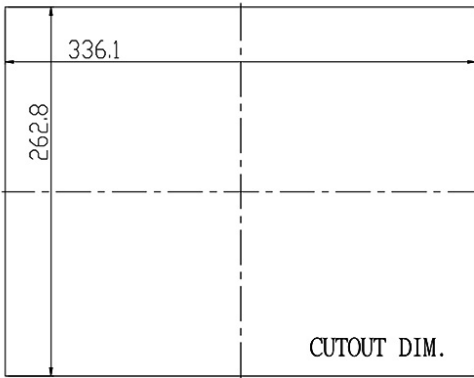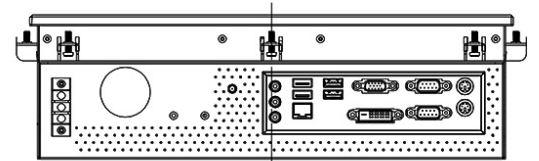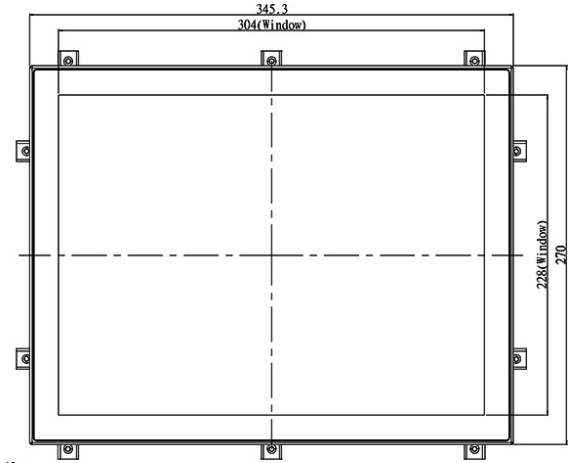

**LCD OPTIONS:**



**LED Backlight Options**

Introducing LED backlight options for monitors for energy efficiency and a brighter screen.



**TouchScreen Options**

Our LCD has a wide selection option to choose which touchscreen technology suits for you.

	Four-Wire Resistive	Five-Wire Resistive	Pen Touch	Capacitive	Surface Wave(Saw)	Infrared Touch (Ir)
<b>PRODUCT SIZE</b>	1.7" - 24"	10.4" - 24"	15" - 19"	12" - 24"	10.4" - 30"	10.4" - 42"
<b>TOUCH LIFE</b>	1 - 2 million touches	30 - 35million touches	100 million touches	100 million touches	50 million touches	Long-term reliability
<b>SCRATCH RESISTANCE</b>	Hard Coated	Hard Coated	Hard Coated (SiO <sup>2</sup> )	Hard Coated (SiO <sup>2</sup> )	Glass Overlay Moh's hardness rating of 7	Glass Overlay Moh's hardness rating of 7
<b>CONTAMINANT RESISTANCE</b>	Resists moisture, dirt, vinegar, ammonia based food products and cleansers	Resists moisture, dirt, vinegar, ammonia based food products and cleansers	Resists moisture, dirt, vinegar, ammonia based food products and cleansers	Resists moisture, dirt, vinegar, ammonia based food products and cleansers	Resists moisture, dirt, vinegar, ammonia based food products and cleansers	Resists moisture, dirt, vinegar, ammonia based food products and cleansers
<b>INPUT METHOD</b>	Finger, Gloved Hand, Stylus	Finger, Gloved Hand, Stylus	Stylus Pen	Finger	Finger, Gloved Hand, Soft pliable stylus	Finger, Gloved Hand, Stylus
<b>CONTROLLER</b>	USB, RS232	USB, RS232	USB, RS232	USB, RS232	USB, RS232	USB, RS232



**VIDEO Input Options:**

For Video inputs options:

DVI, DVI+HDMI, SVideo+AV, SVideo+AV+DVI, AV+Looping, DVI+AV+Looping, HD-SDI, BNC(PAL/NTSC)



**Optical Bonding Options**

- Optical Bonding provides the best reduction of ambient light washout of any commercially available enhancement technology.
- Optical Bonding has a lower cost than most other competing technologies.
- Optical Bonding offers superior ruggedization, enhancing the display durability under vibration, shock and other environmental extremes.



**RS-232 Remote Control Options**

**Remote Control Protocol: Command Code to set system**



**9-36V DC Input Options**

iTech offers a selection of DC input from 9V to 36V



**Light Sensor and Motion Sensor Options**

iTech LCD offers Light and Motion Sensor

**Privacy Filter**

Front Glass Options:

- Anti Reflective AR Glass 3mm
- Anti Reflective AR Glass 6mm Vandal-Resistance
- Anti Reflective AR Glass 8mm Vandal-Resistance
- Anti Glare AG Glass 3mm

