


World Leader • In-Rack • Audio & Video Monitoring

# WOHLER AMP2-AMPPM

Premium Quality, Analog Self-Powered Speaker System with True PPM Meters

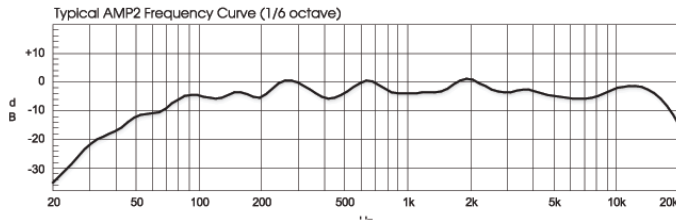

## Features:

- Premium Quality Drivers for Superior Reproduction
- 2 Balanced Analog Inputs (1 Stereo)
- 2 Unbalanced Analog Inputs (1 Stereo)
- Use Either Balanced or Unbalanced Inputs
- Powerful 104dB SPL at 2 feet (0.6m)
- 2 Premium Mechanical PPM Meters (EBU or BBC Scales)
- Exceeds ANSI PPM Meter Specifications
- Excellent Frequency Response and Low Distortion
- Focused Sound, Reduces Adjacent Bay Crosstalk
- Audible Indication of Phase/Polarity Problems
- Innovative LED Display of Phase/Polarity Relationships
- Thorough Magnetic Shielding for Placement next to Video Monitors
- Compact & Convenient, all this Power in only 2U of rack space
- Headphone Jack, Mutes Speakers
- Blowout Proof Speakers
- Quick and Simple Installation

The AMP2-AMPPM is a complete exceptionally high quality stereo audio monitoring system for monitoring 2 analog channels (1 stereo channel) in a compact two rackspace cabinet. The AMP2-AMPPM features two mechanical PPM level meters for accurate level-metering. This unit contains three audiophile-quality drivers and three power amplifiers; two speakers and amplifiers reproduce midrange and high frequency information in stereo, while the third amp/driver combination handles summed LF information below the 500 Hz crossover point.

The unique design provides optimally focused sound for operators in an Ultra Near Field (1 to 3 ft.) working environment and offers performance comparable to that of many separate monitor pairs, yet does so without the installation hassles, awkward speaker placements and "added-on" look. This provides for a higher SPL for the operator while reducing overall ambient sound and adjacent bay crosstalk.

Excellent HF response reveals potential problems with audio whine or hiss and electronic rather than acoustic cancellation of bass frequencies provides positive audible detection of out-of-phase (reversed polarity) audio feeds. A headphone jack is provided on the front panel, usage automatically mutes the speakers. The front panel features an innovative LED Display of Phase/Polarity Relationships. Output limiter circuits are incorporated to protect the speakers, and extensive magnetic shielding allows placement immediately adjacent to video monitors with no color impurities.

The AMP2-AMPPM is ideally suited for use in VTR bays, mobile production vehicles, teleconferencing installations, multimedia systems, satellite link and cable TV facilities, and on-air radio studios. Built and rigorously tested in the USA, the AMP2A-AMPPM is backed by a strong warranty and a "Satisfaction Guaranteed" return policy.

**i-TECH**  
**COMPANY**  
www.i-techcompany.com  
Toll Free: 1-888-483-2418  
USA: 1-510-429-9288  
Fax: 1-510-372-2736

Audio Monitoring

Level Metering

Alarm Systems

Video Monitoring


**Wohler**

January 27, 2004


# WOHLER AMP2-AMPPM

Premium Quality, Analog Self-Powered Speaker System with True PPM Meters

## Rear Panel:

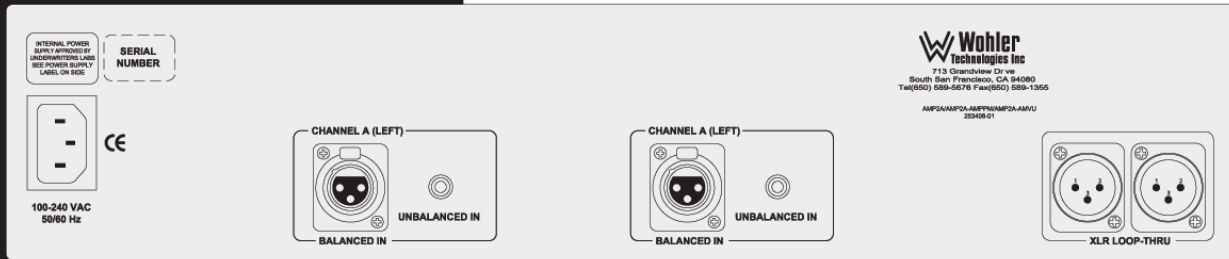

## System Diagram:

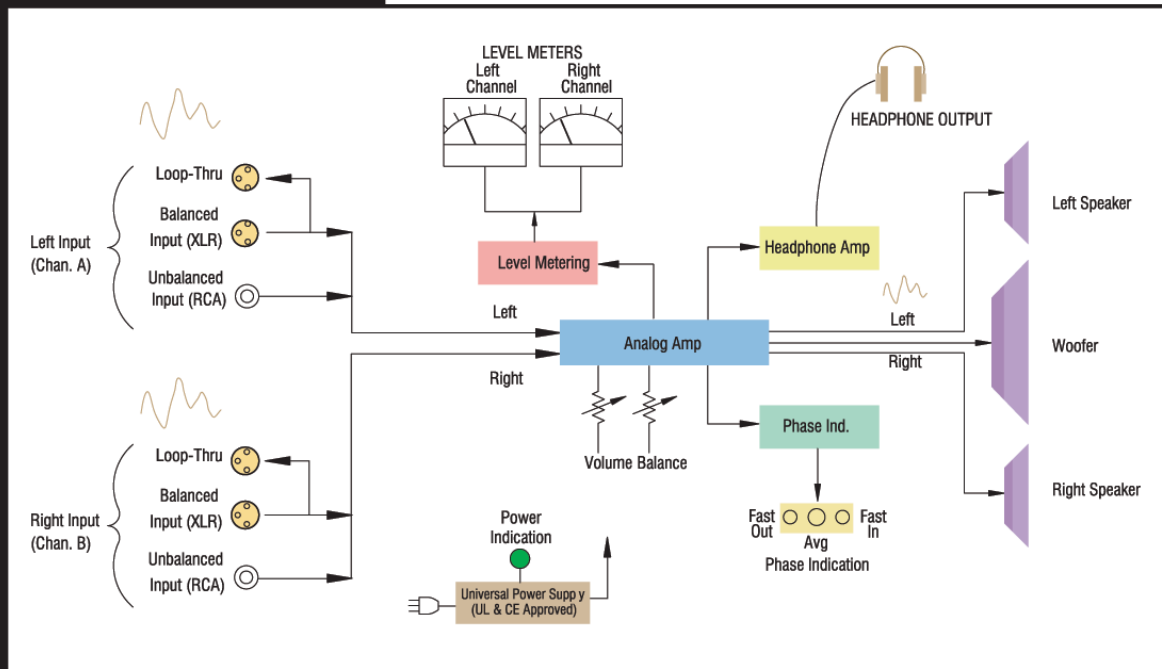

## Specifications:

Input	1 stereo balanced (XLR) or unbalanced (RCA) analog
Output	loop-through of balanced analog input - XLR
Level meters	2 x mechanical PPM meters
Level meter scale	specify BBC (1 to 7), EBU type I & II
Level meter threshold	-6, 0, +4, or +8 dB; DIP switch selectable
Level meter dynamics	BBC or EBU
Analog input impedance	>40 kOhms balanced 10 kOhms unbalanced
Peak acoustic output @ 2 feet	104dB SPL
Frequency response (1/6 octave)	.80Hz - 16kHz (±5dB) (-10dB @ 40Hz, 20kHz)
Power output	RMS each side (4 Ohms) - 10W, 14W peak RMS center WOOFER (4 Ohms) - 25W, 35W peak
Electrical distortion	<0.15% at any level below limit threshold
Acoustic distortion	.6% or less worst case frequencies above 120Hz including cabinet resonance, typically < 1.5%
Hum and noise	better than -68dB below full output
Magnetic shielding	<0.8 gauss any adjacent surface
Power consumption (AVG. MAX.)	.45W
Dimensions (HxWxD)	.3.5 x 19 x 12" (89 x 483 x 305mm)
Weight (approx.)	18lbs (8.2kg)
Power supply	100 to 240VAC, 50/60Hz universal input CE and UL approved

All specifications are subject to improvement

