


SUNLIGHT READABLE CHASSIS/SURFACE MOUNT LCD MONITOR

INDUSTRIAL CHASSIS/VESA METAL HOUSING HIGH BRIGHTNESS

15.6" 1366x768, 1000nits LED Sunlight Readable Wide Temp 0C to 60C
9-36DC input VGA+DVI+HDMI Input, 5 Wires Resistive Touch
with USB Controller with Aluminum Housing

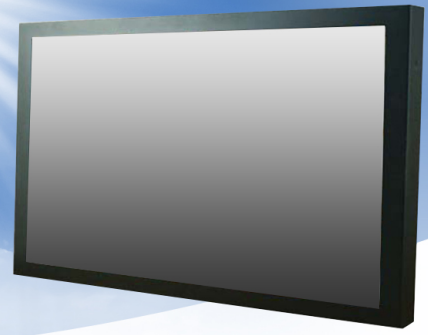

Model: YCHW1560-TR-SK01

FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 1920*1080.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.


SPECIFICATIONS:

Panel Type	15.6" TFT LCD
Screen Diagonal	15.6"
Active Display Area (mm)	344.23(H) x 193.53(V)
Pixel Pitch (mm)	0.17925 x 0.17925
Number of Pixels	1366x768
Contrast Ratio	500:1
Display Color	16.2M Colors (RGB 6-bits +2FRC)
Brightness (cd/m)	1000 cd/m (Without Touch)
Viewing Angle(Typ.)	85/85/80/80(R/L/U/D)
Signal Connector	VGA, DVI, HDMI
Power Source	DC 9-36V
Power Management	VESA DPMS Compliant
Operating Temperature	0 ~ + 60°C
Storage Temperature	-20 ~ +60°C
Plug & Play	VESA DDC 1/2B
Touch Type	5 Wires Resistive Touch
Transparency	> 85% (typ.)
Hardness of surface	7H
Linearity	±1.5%(max.)

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

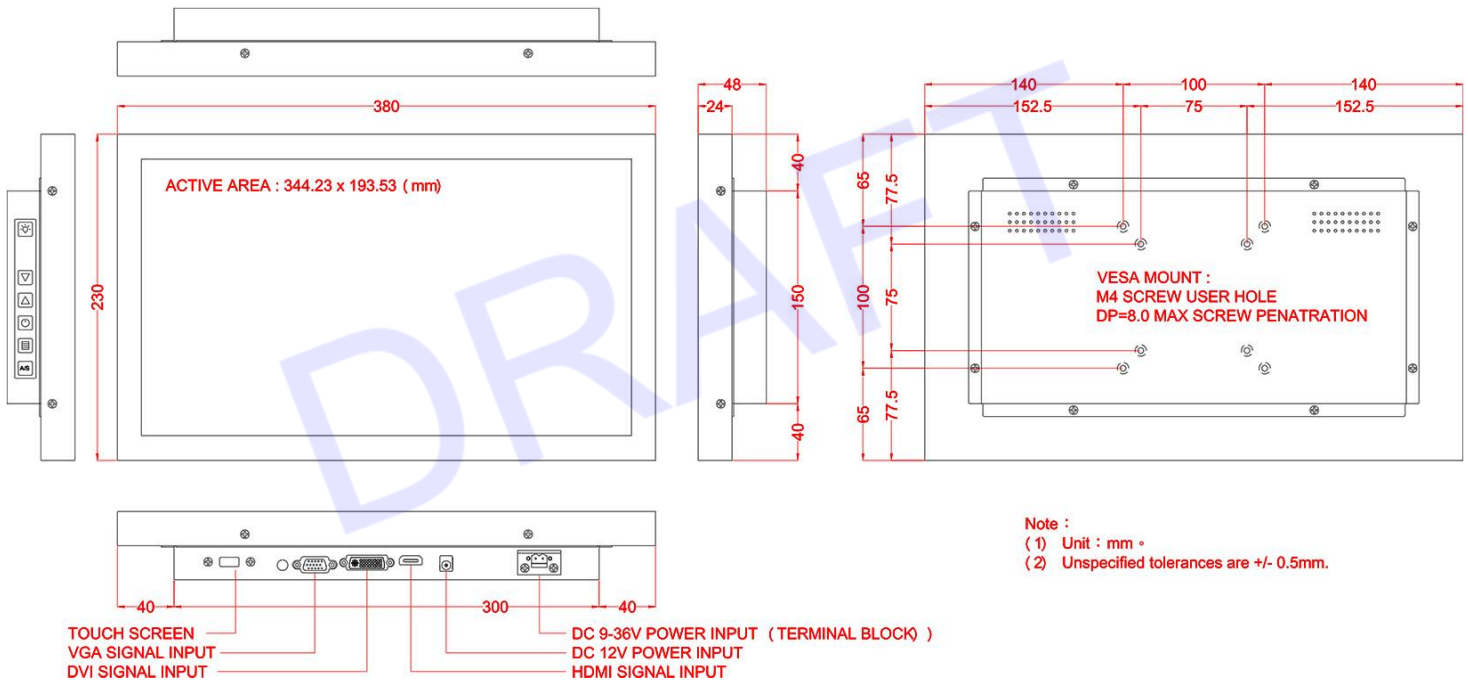

Drawing No.: YCHW1560-TR-SK01-07282023-V1