


SUNLIGHT READABLE CHASSIS / WALL MOUNT HIGH BRIGHTNESS

True Flat Design / Aluminum Front Housing / 15.6" 1920x1080 / 1000 nits LED /
VGA+DVI+HDMI input / 2W Speaker / 3mm AG coating Glass PCAP Touch with USB
controller / 10-points Multi-Touch / Operating Temperature -30 ~ +85C
Hardness of surface 7H / VESA Mount

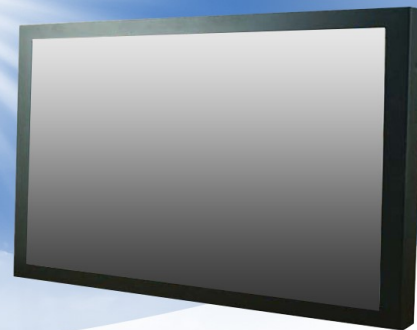

Model: YCHW1560HB-PCT

FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 1920*1080.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.


SPECIFICATIONS:

Panel Type	15.6-inch TFT LCD
Screen Diagonal	15.6-inch
Active Display Area (mm)	344.16(H) x 193.59(V)
Pixel Pitch (mm)	0.17925 x 0.17925
Number of Pixels	1920 x 3(RGB) x 1080
Contrast Ratio	500:1
Display Color	16.2M Colors (RGB 6-bits +2FRC)
Brightness (cd/m)	1000 cd/m
Viewing Angle(Typ.)	70 / 70 / 60 / 60 (R/L/U/D)
Signal Connector	VGA + DVI + HDMI
Power Source	DC +12V(+/-10%)
Power Management	VESA DPMS Compliant
Operating Temperature	-30 ~ +85°C
Storage Temperature	-20 ~ +70°C
Plug & Play	VESA DDC 1/2B
Touch Type	Projected Capacitive Touch
Transparency	> 85% (typ.)
Hardness of surface	7H
Linearity	±1.5%(max.)
Other option:	
DC 9-36V Wide Voltage Input	

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

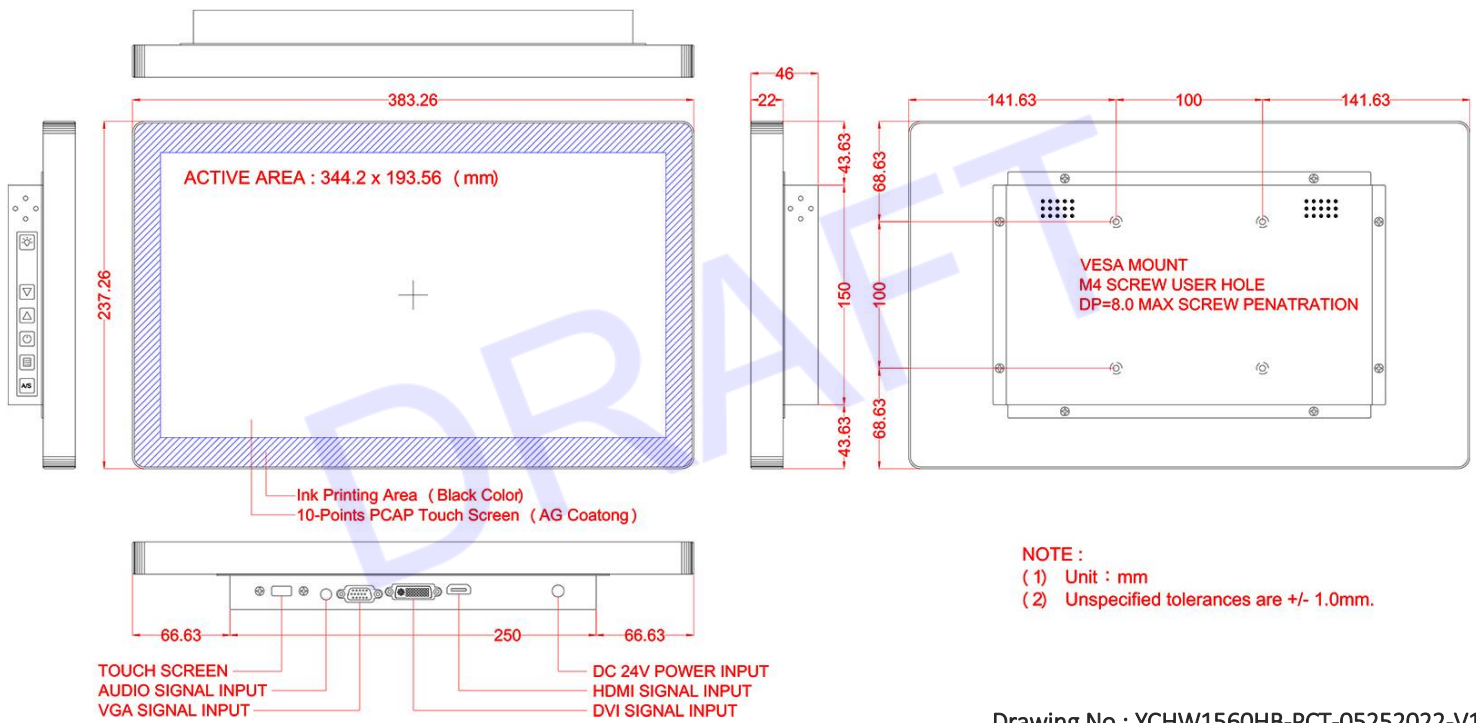

NOTE :
(1) Unit : mm
(2) Unspecified tolerances are +/- 1.0mm.

Drawing No.: YCHW1560HB-PCT-05252022-V1