


Sunlight Readable Chassis / Wall Mount High Brightness LCD

Industrial Chassis VESA mount True Flat 15.6" 1920x1080 / 1000nits / LED backlight / VGA+DVI+HDMI input / 3mm Glass PCAP Touch with USB controller /10-points Multi-Touch Operating Temperature -10 ~ +70 C Hardness of surface 7H

Model: YCHW1560HB-TPCT

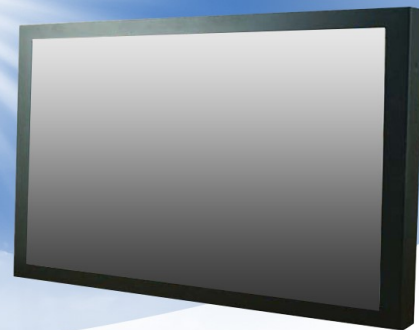


FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 1920*1080.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.

SPECIFICATIONS:

| | |
|-----------------------------|----------------------------------|
| Panel Type | 15.6-inch TFT LCD |
| Screen Diagonal | 15.6-inch |
| Active Display Area (mm) | 344.16(H) x 193.59(V) |
| Pixel Pitch (mm) | 0.17925 x 0.17925 |
| Number of Pixels | 1920 x 3(RGB) x 1080 |
| Contrast Ratio | 500:1 |
| Display Color | 16.2M Colors (RGB 6-bits +2FRC) |
| Brightness (cd/m) | 1000 cd/m (Without Touch) |
| Viewing Angle(Typ.) | 70 / 70 / 60 / 60 (R/L/U/D) |
| Signal Connector | 15 PIN D-Sub,DVI-D,HDMI |
| Power Source | DC +12V(+/-10%) |
| Power Management | VESA DPMS Compliant |
| Operating Temperature | -10 ~ +70°C |
| Storage Temperature | -20 ~ +70°C |
| Plug & Play | VESA DDC 1/2B |
| Touch Type | Projected Capacitive Touch |
| Transparency | > 85% (typ.) |
| Hardness of surface | 7H |
| Linearity | ±1.5%(max.) |
| Other option: | |
| DC 9-36V Wide Voltage Input | |

MECHANICAL DRAWINGS:

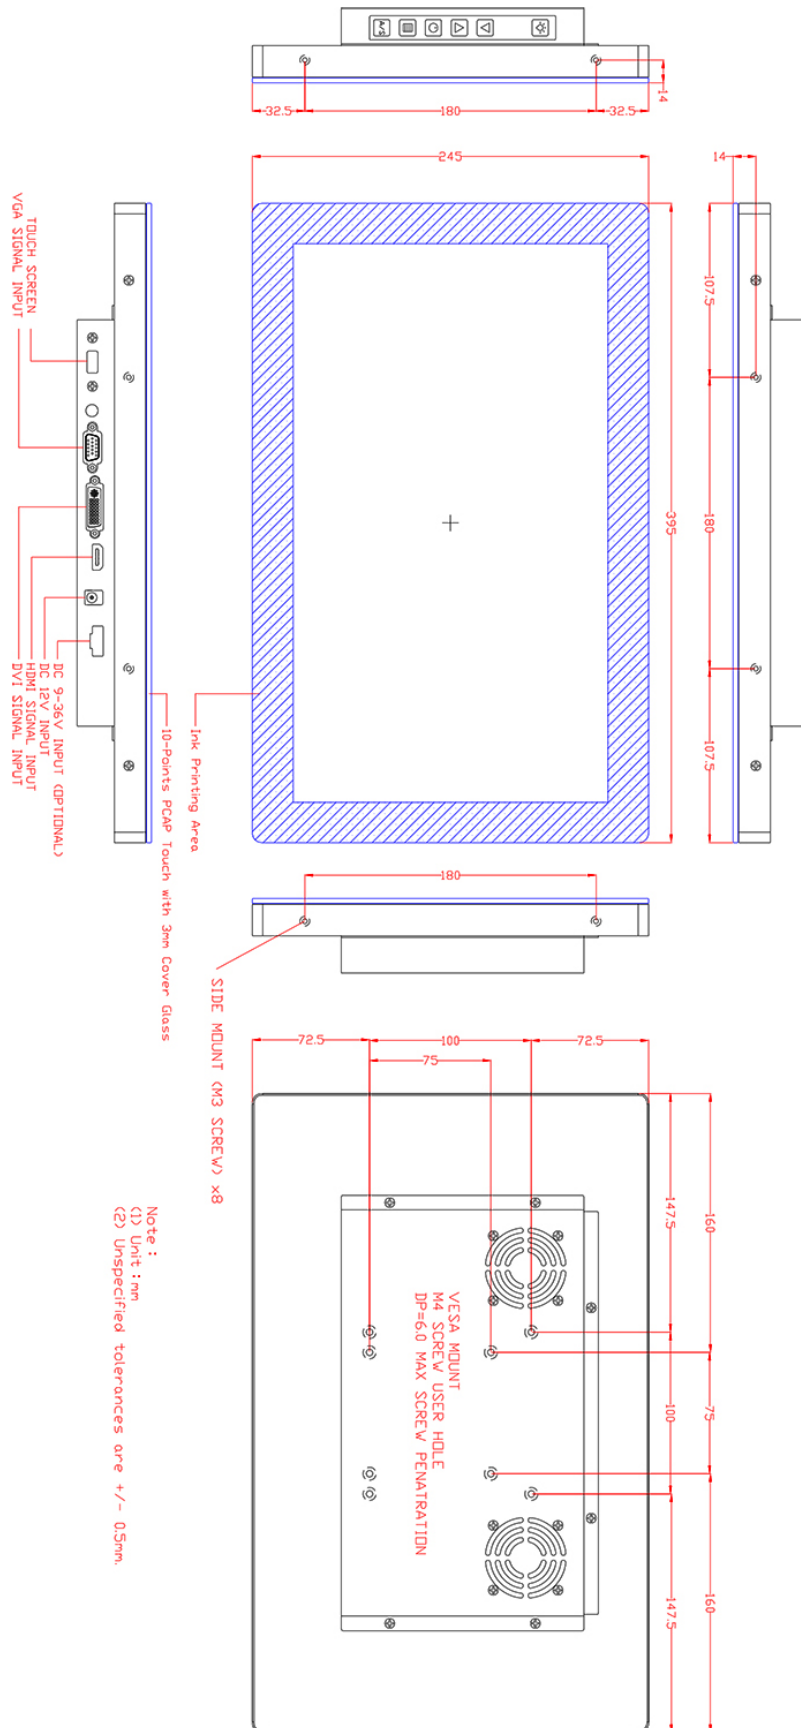

Note :
 (1) Unit : mm
 (2) Unspecified tolerances are +/- 0.5mm.