

Chassis Mount Metal Housing High Brightness LCD

Industrial Chassis Mount Metal Housing High Brightness

65" LCD 2500nitsLED Backlight 1920 x 1080, Brightness Backlight HDMI+DVI+VGA input (Panel Enhancement to prevent isotropic blackout under direct Sun up to 85C) Contrast Ratio 4000:1, 110V AC, Operating Temp 32F to 122F (0C to 50C) One(1) Year Return to Depot Warranty, Life time 60K hours, operating Time 20 hours/Per day, Anti Shock 30G, Anti Vibration 1G (2-200Hz)



Model: YCHW6500HBWT

2500nits

FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 1920 x 1080.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.


SPECIFICATIONS:

Item	Specification
Panel Type	65.0-inch TFT LCD
Screen Diagonal	65.0-inch
Active Display Area (mm)	1428.48(H) x 803.52(V)
Pixel Pitch (um)	0.21 (H) x 0.63(W)
Number of Pixels	1,920x1,080
Contrast Ratio	4000:1
Color Arrangement	R.G.B. Vertical Stripe
Brightness (cd/m ²)	2500 cd/m ²
Viewing Angle(Typ.)	89/89/89/89 (R/L/U/D)
Signal Connector	15 PIN D-Sub, DVI-D, HDMI
Power Source	AC 100 ~ 240V, Universal +/- 10%
Power Management	VESA DPMS Compliant
Operating Temperature	0°C ~+50°C
Storage Temperature	-20 ~ +60°C
Plug & Play	VESA DDC 1/2B

*Specifications subject to change without notice, not responsible for typographical errors.

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

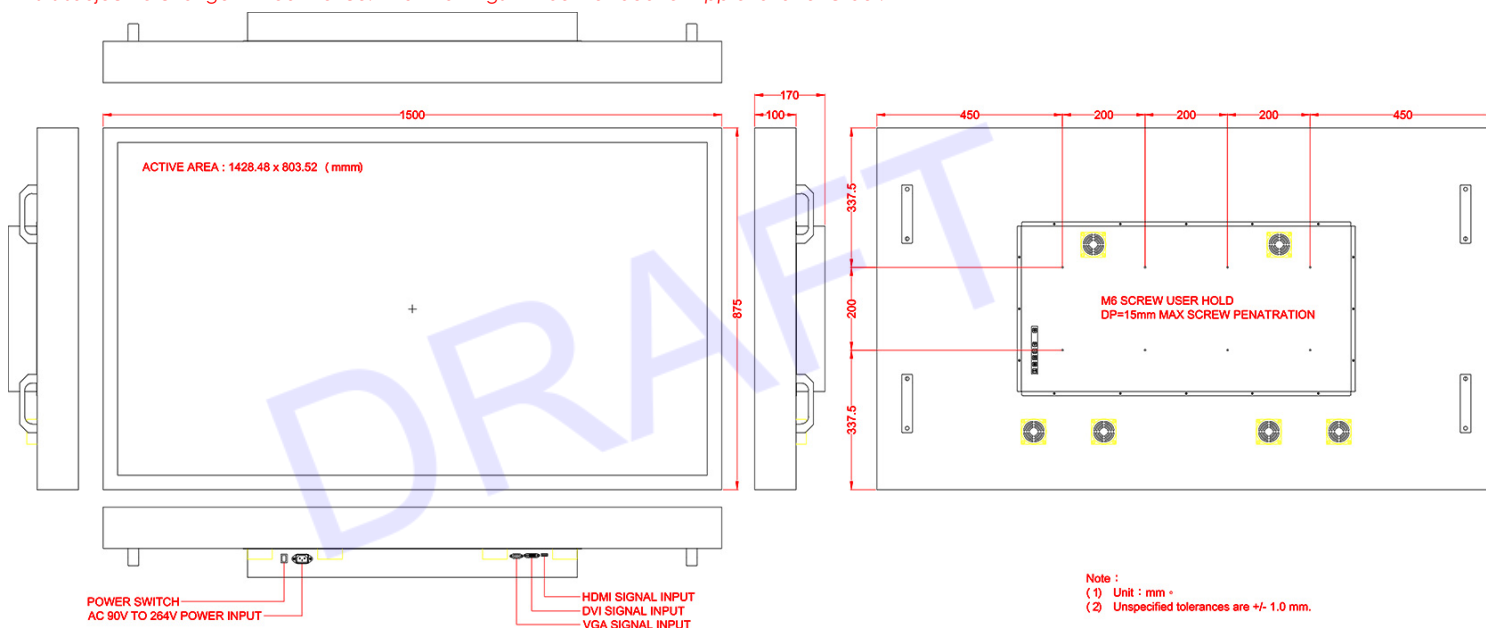

Drawing No.: YCHW6500HBWT-01172023-V1