


INDUSTRIAL HIGH BRIGHTNESS LCD

IP65 Front Flush Mount (Aluminum 6mm), 20.1" LCD monitor, 1600 x 1200 , LED, 800 nits, Front Side OSD membrane with "Up" and "Down" to Control Brightness directly. VGA+DVI+HDMI input / AR Glass / DC 9~36V input

Model: YFM2010HB

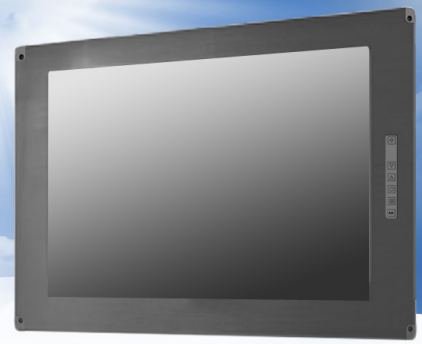

FEATURES:

- Sunlight Readable.
- 20.1" Full-HD TFT LCD with resolution up to 1600x1200.
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.

SPECIFICATIONS

Active Area	408x306mm
Pixels H x V	1600x1200
Pixel Arrangement	R.G.B. Vertical Stripe
Display Mode	TN Mode. Normally White
White Luminance	800 (center, Typ) cd/m ²
Contrast Ratio	1000 : 1 (Typ)
Optical Response Time	5 ms(Typ, on/off) msec
Power Input	DC 9~36V
Signal Input	VGA+DVI+HDMI
Surface Treatment	Anti-Glare, 3H
Support Color	16.7M colors (RGB 6-bit data + HiFRC data)
Physical Size (H x V x D)	500 (H) x 380 (V) 17 (D) (Typ) mm
Temperature Range Operating	0°C ~ 50 °C
Storage (Non-Operating)	-20°C ~ 60 °C
RoHS Compliance	RoHS Compliance

Mechanical Drawing

