

SUNLIGHT READABLE HIGH BRIGHTNESS

IP66 Front Flush Mount (Aluminum-6mm)

Front Flush Mount IP66/ 7" 6mm Aluminum front bezel / True flat design / 800x480 / 400nits LED / VGA+DVI+HDMI input / Rear OSD / Panel mount / DC 12V Power input

PCAP Touch with USB controller (10-points touch for Win 7/WIN 10) / -30-70C



Model: YFMW0700PWT-PCAP

FEATURES:


- High contrast color TFT-LCD Monitor support resolution up to 800*480.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.

SYSTEM SPECIFICATIONS:

Panel Type	7-inch TFT LCD
Screen Diagonal	7-inch
Active Display Area (mm)	152 (H) x 91 (V)
Pixel Pitch (mm)	0.1905 x 0.1905
Number of Pixels	800 * 480
Contrast Ratio	400:1
Color Arrangement	R.G.B. Vertical Stripe
Brightness (cd/m ²)	400 cd/m ²
Viewing Angle(Typ.)	65/65/70/70 (R/L/U/D)
Signal Connector	VGA + DVI + HDMI
Power Source	AC110 ~ 220V, Universal +/- 10%
Power Management	VESA DPMS Compliant
Operating Temperature	-30 ~ 70°C
Plug & Play	VESA DDC 1/2B

**Specifications subject to change without notice, not responsible for typographical errors.*

Clamp Mount

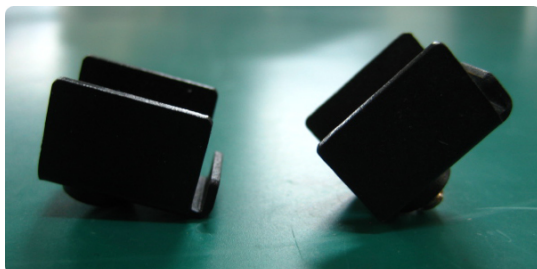

MECHANICAL DRAWING:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

