


INDUSTRIAL HIGH BRIGHTNESS LCD

IP65 Front Flush Mount (Aluminum 6mm), 21.5" LCD monitor, 1920 x 1080, LED, 1500 nits, Front Middle OSD membrane with "Up" and "Down" to Control Brightness directly. DC 9-36V input

Model: YFMW2150HB2

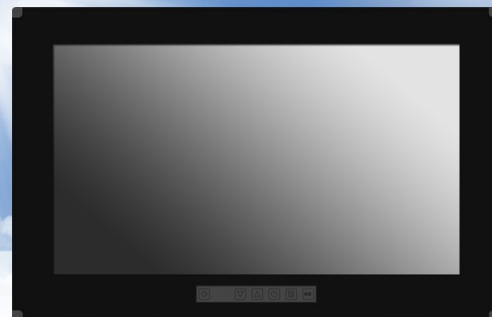

FEATURES:

- Sunlight Readable.
- 21.5" Full-HD TFT LCD with resolution up to 1920x1080.
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.

SPECIFICATIONS

Active Area	476.64 (H) x 268.11 (V)
Pixels H x V	1920 x 1080
Pixel Pitch	248.25 (per one triad) x 248.25
Pixel Arrangement	R.G.B. Vertical Stripe
Display Mode	TN Mode. Normally White
White Luminance	1500 (center, Typ) cd/m ²
Contrast Ratio	1000 : 1 (Typ)
Optical Response Time	5 ms(Typ, on/off) msec
Nominal Input Voltage VDD	+5.0 V Volt
Electrical Interface	Dual channel LVDS
Surface Treatment	Anti-Glare, 3H
Support Color	16.7M colors (RGB 6-bit data + HiFRC data)
Physical Size (H x V x D)	495.6 (H) x 292.2 (V) 16.35 (D) (Typ) mm
Temperature Range Operating	0 to +50 °C
Storage (Non-Operating)	-20 to +60 °C
RoHS Compliance	RoHS Compliance

Mechanical Drawing

