

SUNLIGHT READABLE OPEN FRAME HIGH BRIGHTNESS LCD

12.1" Open Frame (with sponge) / 1000nits LED / 1024x768 / VGA+DVI+HDMI
Signal input / 5 Wires Resistive Touch screen with USB controller / -30 ~ +70C,
12V DC input with external Power adapter.



Model: YOP1210PHBTR-A1

FEATURES:

- Sunlight Readable.
- LED Backlight.
- 12.1" SVGA TFT LCD with resolution up to 1024x768
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.


SYSTEM SPECIFICATIONS

Brightness (cd/m ²)	1000
Display Resolution (pixel)	SVGA(1024x768)
Display Color	262K / 16.2M
Viewing Angles (CR≥10)	80/80/80/60 (R/L/U/D)
Contrast Ratio	600:1
Response Time (msec)	35
Backlight Unit	LED
Temperature	-30°C ~ 70°C
Power Source	12V DC input with external Power adapter.
Touch	5 Wires Resistive Touch screen with USB controller

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

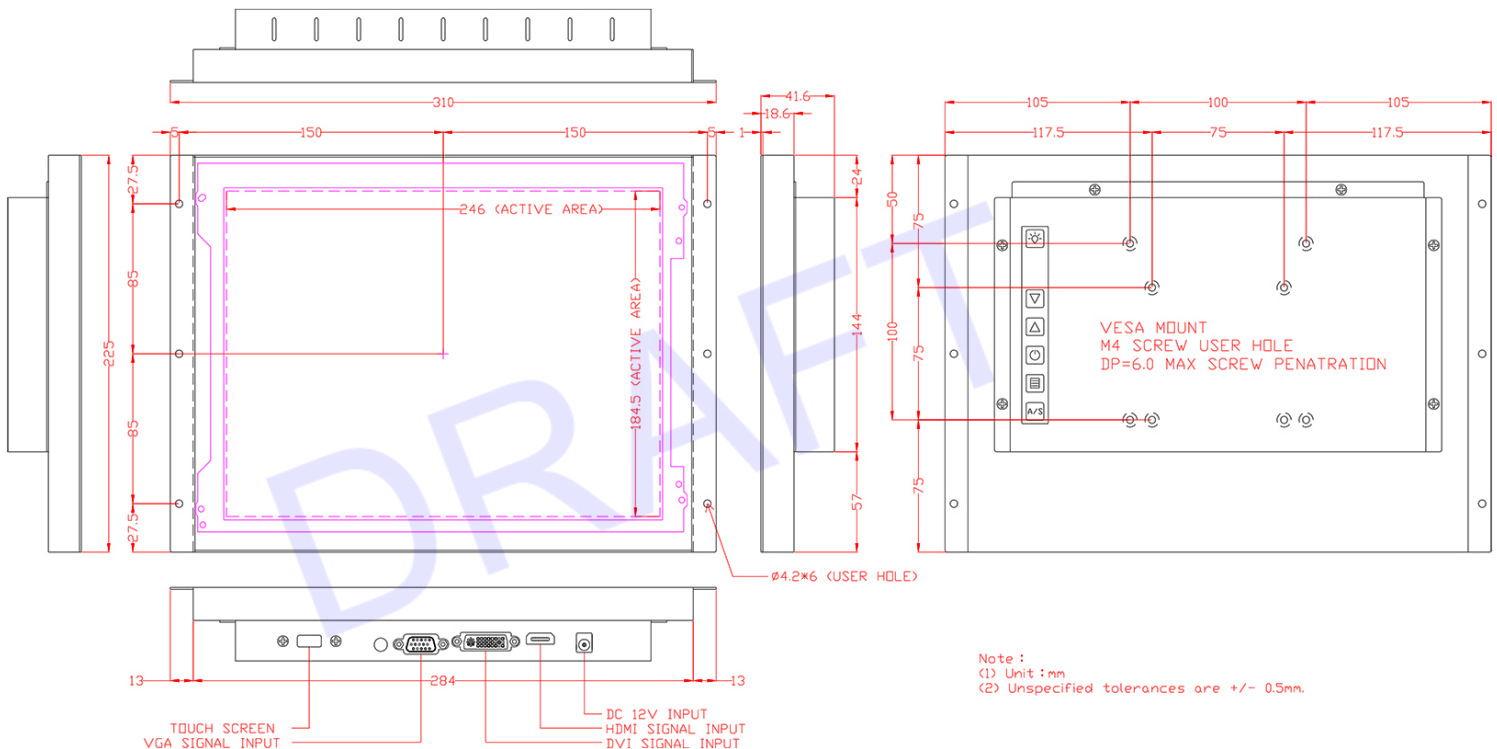

Note:
(1) Unit : mm
(2) Unspecified tolerances are +/- 0.5mm.

Drawing No.: YOP1210PHBTR-A1-03082023-V1