

Industrial Open Frame LCD

Open Frame Metal Housing , 4:3, 21.3" LCD monitor, 1600x1200, 800 nits, 1200:1 Operating temp 0-60, VGA+DVI +HDMI (DAC001) input, SVideo, composite Video x1, RS232 for remote control OSD ,Side OSD with PIP



Model: YOP2130CHB-PIP





FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 1600*1200.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.

SPECIFICATIONS:

Panel Type	21.3-inch TFT LCD
Viewable Size Image	21.3-inch
Active Display Area (mm)	432 (H) x 324 (V)
Pixel Pitch (mm)	0.27 x 0.27
Number of Pixels	1600x1200
Contrast Ratio	1200:1
Display Color	16.7M
Brightness (cd/m ²)	800nits
Viewing Angle(Typ.)	85 / 85 / 85 / 85 (R/L/U/D)
Signal Connector	VGA+DVI +HDMI (DAC001) input
Power Source	DC12V, AC110 ~ 220V, Universal +/- 10%
Power Management	VESA DPMS Compliant
Operating Temperature	0 ~ 60°C
Storage Temperature	-20 ~ 60°C
Plug & Play	VESA DDC 1/2B

MECHANICAL DRAWINGS:

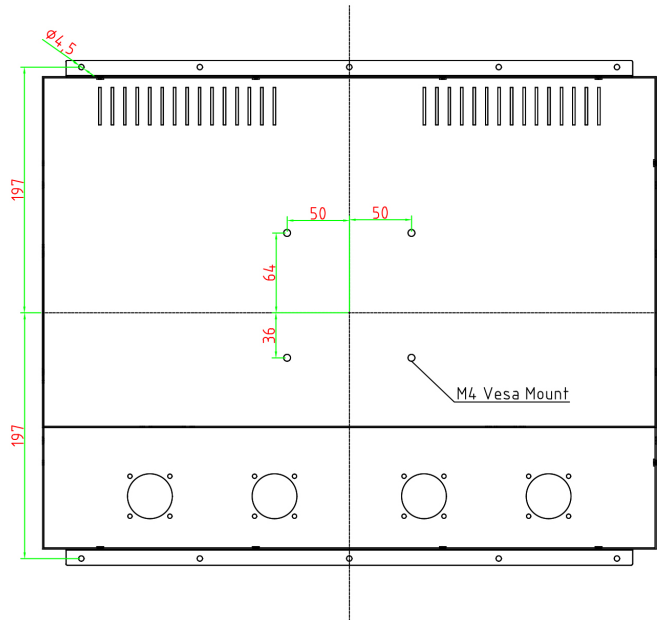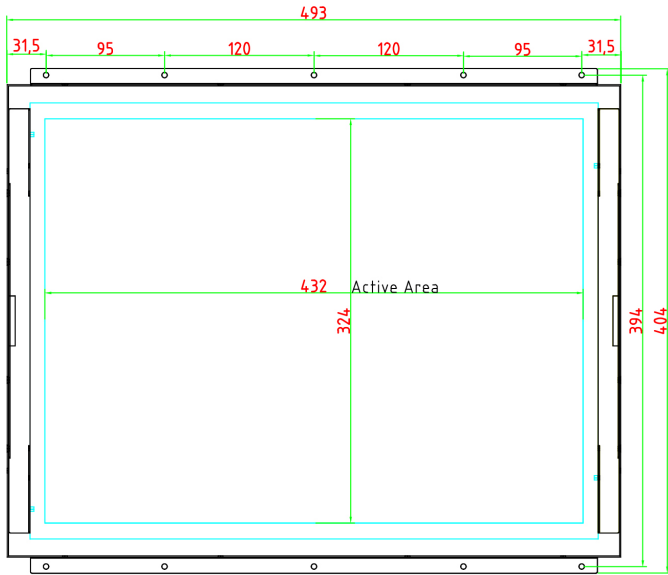

- RS232 Remote control
- HDMI
- AV Audio
- PC Audio
- S-Video
- Video input
- DVI
- VGA
- AC110-240

UNIT:mm