


SUNLIGHT READABLE OPEN FRAME HIGH BRIGHTNESS LCD

Open Frame 12.1" Wide 1280x800, 1500nits LED VGA+DVI+HDMI, Side OSD
DC 9-36V Power Input / -30C to +85C / Power Consumption 16 Watts



Model: YOPW1210HB2

FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 1280*800.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.


SPECIFICATIONS:

Panel Type	12.1-inch TFT LCD
Screen Diagonal	12.1-inch
Active Display Area (mm)	261.12 (H) x 163.2 (V)
Number of Pixels	1280 x 800
Contrast Ratio	1000:1
Display Color	262K/16.2M colors
Brightness (cd/m)	1500 cd/m (Without Touch)
Viewing Angle(Typ.)	89/ 89 / 89 / 89 (R/L/U/D)
Signal Connector	VGA+DVI+HDMI
Power Source	DC +12V(+/-10%),DC 9-36V (Terminal Block)
Power Management	VESA DPMS Compliant
Operating Temperature	-30 ~ 85°C
Storage Temperature	-30 ~ 85°C
Plug & Play	VESA DDC 1/2B

**Specifications subject to change without notice, not responsible for typographical errors.*

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

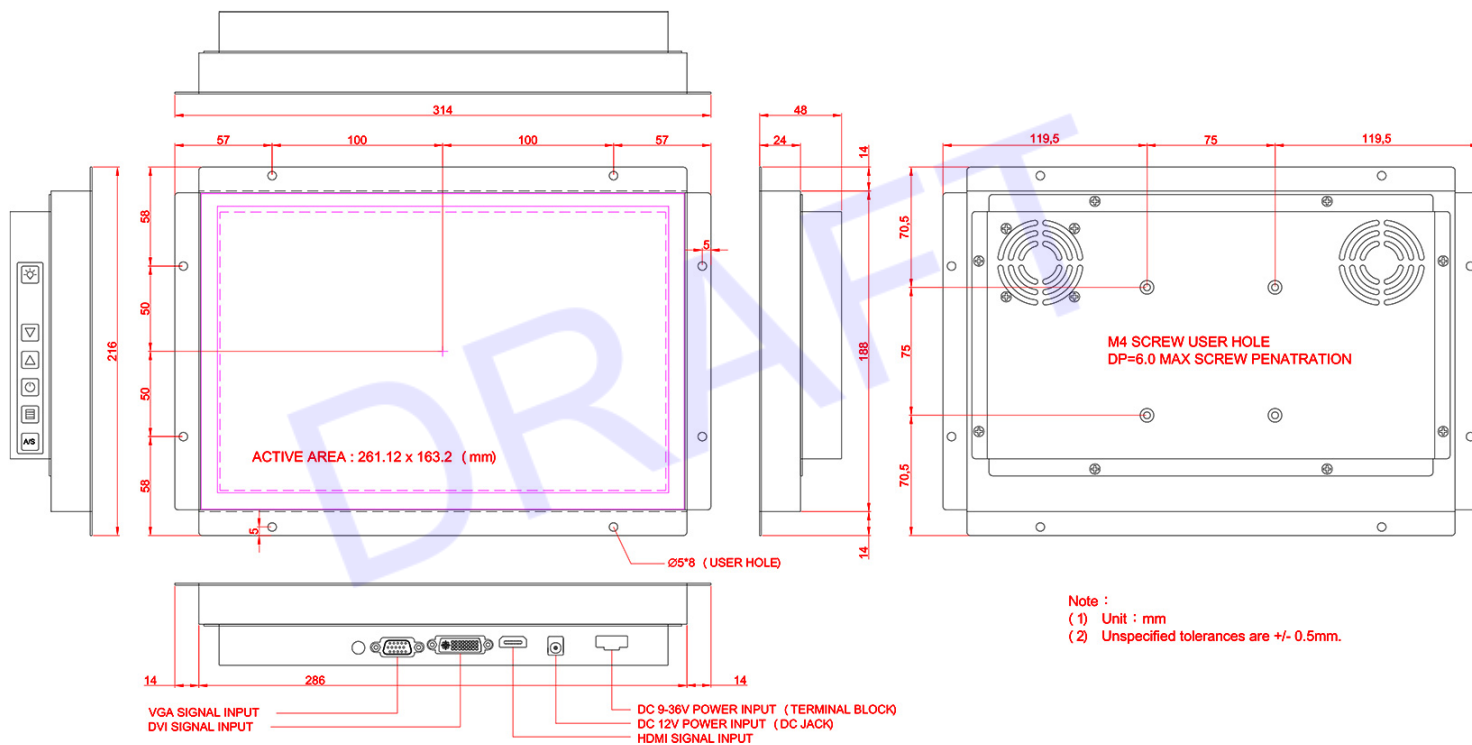

Drawing No.: YOPW1210HB2-06162023-V1