



## Model: YOPW1560HB-TR-TH

Super Thin 40mm (1.58" Thick) 15.6", 1920x1080, 1000nit, VGA+DVI+HDMI Input, 5-Wires Resistive Touch with USB Controller, DC 9-36V Power Input, External OSD with Hot key Control Brightness + Loose OSD Membrane Extended 12" Long Cable with "Up" and "Down" to Control Brightness directly.

### FEATURES:

- High color TFT-LCD Monitor support resolution up to 1920\*1080.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Heavy duty monitor with steel frame.


### SPECIFICATIONS:

Panel Type	15.6-inch TFT LCD
Screen Diagonal	15.6-inch
Active Display Area (mm)	344.16(H) x 193.59(V)
Pixel Pitch (mm)	0.17925 x 0.17925
Number of Pixels	1920 x 3(RGB) x 1080
Contrast Ratio	700:1
Display Color	16.2M Colors ( RGB 6-bits +2FRC)
Brightness (cd/m)	1000nits
Viewing Angle(Typ.)	80 / 80 / 70 / 70 ( R/L/U/D)
Signal Connector	VGA+DVI+HDMI
Power Source	DC +12V(+/-10%)
Power Management	VESA DPMS Compliant
Operating Temperature	-10 ~ +70°C
Storage Temperature	-20 ~ +70°C
Plug & Play	VESA DDC 1/2B
Touch Type	5-Wires Resistive touch with USB controller
Transparency	> 85% (typ.)
Hardness of surface	7H
Linearity	±1.5%(max.)
<b>Other option:</b>	
DC 9-36V Wide Voltage Input	

*\*Specifications subject to change without notice, not responsible for typographical errors.*

# MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

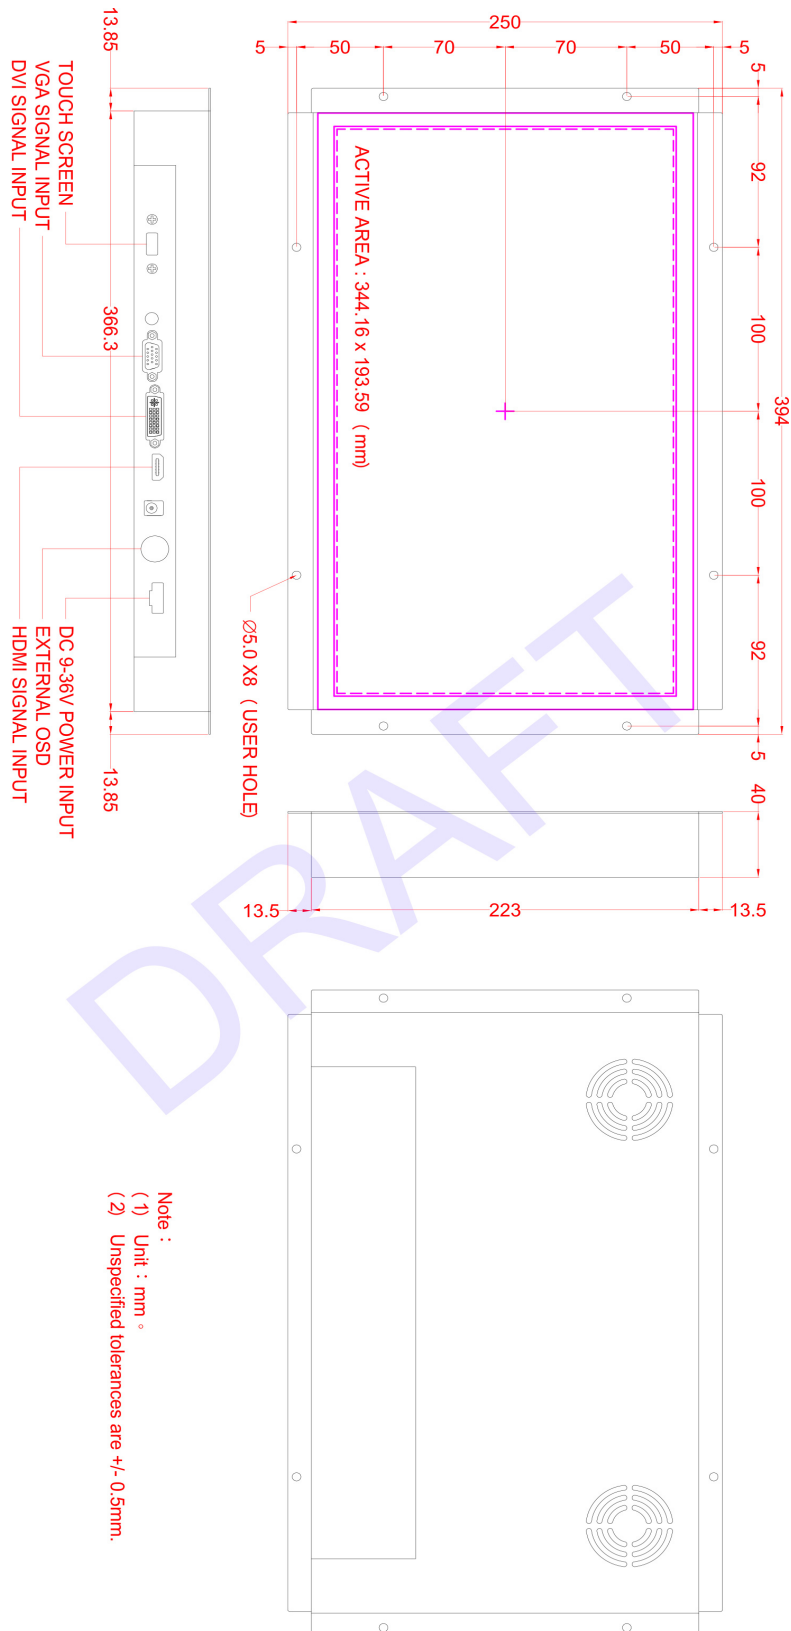

Note :  
(1) Unit : mm .  
(2) Unspecified tolerances are +/- 0.5mm.