

INDUSTRIAL OPEN FRAME METAL HOUSING HIGH BRIGHTNESS

32" LCD 1920*1080, contrast 1000:1 with HDMI input 1500nits LED Backlight
Contrast Ratio 3000:110/220V AC, PCAP Touch with EETI (eGalax)
USB controller / power 110~220V AC input / Landscape
No light sensor/Air curtain

Operating Temp -4F to 140F (-20C to 60C) One(1) Year Return to Depot Warranty, Life time
60K hours, operating Time 24 hours/Per day (Moving Pictures)
Anti Shock 30G, Anti Vibration 1G (2-200Hz),(Panel Enhancement to prevent isotropic
blackout under direct Sun up to 110C)
*New Overall Thickness is 4.055" 103mm***

MODEL: YOPW3200HBWT-IT102



FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 1920 x 1080.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.


SPECIFICATIONS:

ITEM	SPECIFICATION
Panel Type	32.0-inch TFT LCD
Screen Diagonal	32.0-inch
Active Display Area (mm)	698.4 (H) x 392.85(V)
Pixel Pitch (um)	0.3637 (H) x 0.3637 (W)
Number of Pixels	1,920x1,080
Contrast Ratio	3000:1
Color Arrangement	R.G.B. Vertical Stripe
Brightness (cd/m ²)	1500 cd/m ²
Viewing Angle(Typ.)	89/89/89/89 (R/L/U/D)
Signal Connector	15 PIN D-Sub, DVI-D
Power Source	AC100 ~ 240V, Universal +/- 10%
Power Management	VESA DPMS Compliant
Operating Temperature	-20 ~ 60°C
Plug & Play	VESA DDC 1/2B

*Specifications subject to change without notice, not responsible for typographical errors.

MECHANICAL DRAWINGS:

This is subject to change without Notice. Final Drawings Will be Provided for Approval after Order.

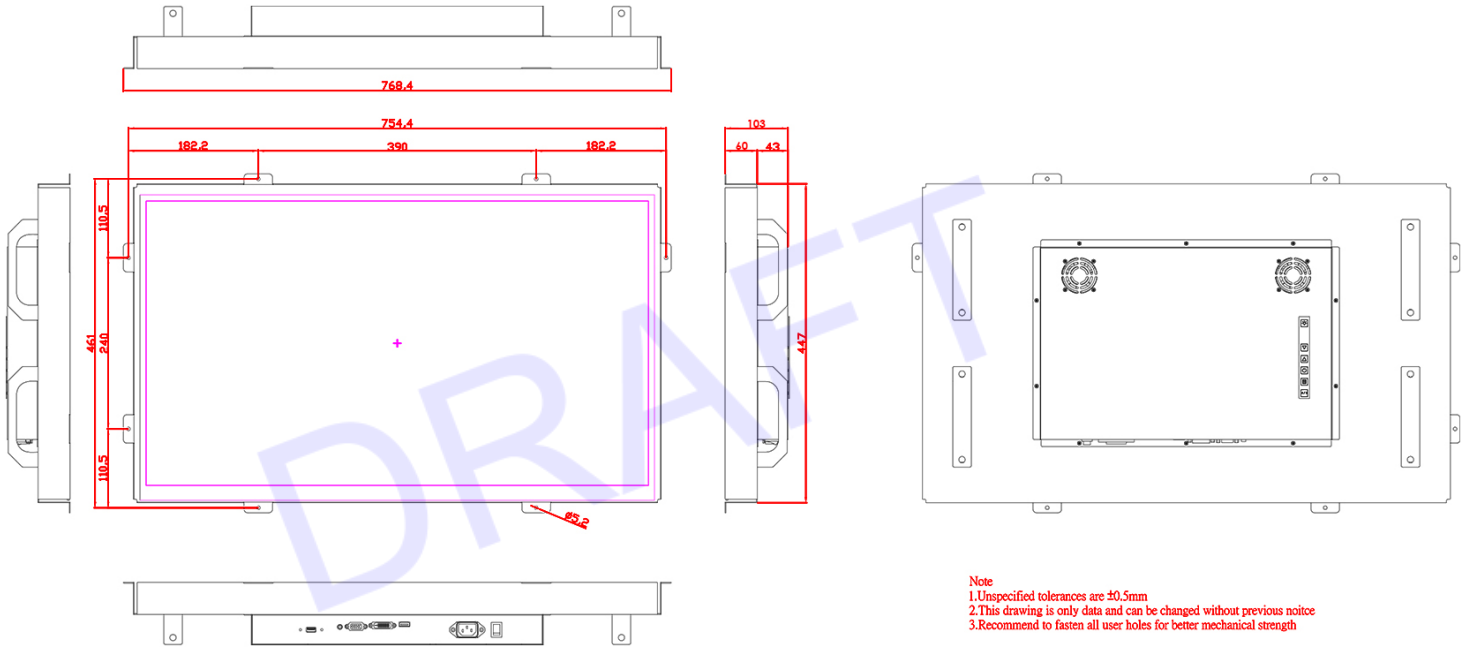

Drawing No.: YOPW3200HBWT-ITI02-03092023-V1