


Sunlight Readable Open Frame High Brightness LCD

Open Frame Wide 12.1" LCD monitor, 1280 x 800 , 1000 nits LED VGA + DVI Input, Rear OSD, including rear Clamp mount, Wide input range: 9-36 VDC Terminal Block "+" and "-". Wide temp -10~70C

Model: YOPW1210HB





FEATURES:

- High contrast color TFT-LCD Monitor support resolution up to 1920*1080.
- Power management system conforms to VESA DPMS and EPA Energy Star standards.
- Full consideration for touch screen installation and application.
- Universal Power adapter.
- Support DDC1 & DDC2B for Plug & Play compatibility.
- Advanced OSD control for picture quality adjustment.
- Detachable stand for wall-mounting adjustment.
- Heavy duty monitor with steel frame.
- Custom design by request.

SPECIFICATIONS:

Panel Type	12.1-inch TFT LCD
Screen Diagonal	12.1-inch
Active Display Area (mm)	261.12 (H) x 163.2 (V)
Number of Pixels	1280 x 800
Contrast Ratio	1000:1
Display Color	262K/16.2M colors
Brightness (cd/m)	1000 cd/m (Without Touch)
Viewing Angle(Typ.)	88 / 88 / 88 / 88 (R/L/U/D)
Signal Connector	15 PIN D-Sub,DVI-D,HDMI
Power Source	DC +12V(+/-10%),DC 9-36V (Terminal Block)
Power Management	VESA DPMS Compliant
Operating Temperature	-10 ~ +70°C
Storage Temperature	-20 ~ +80°C
Plug & Play	VESA DDC 1/2B

MECHANICAL DRAWINGS:

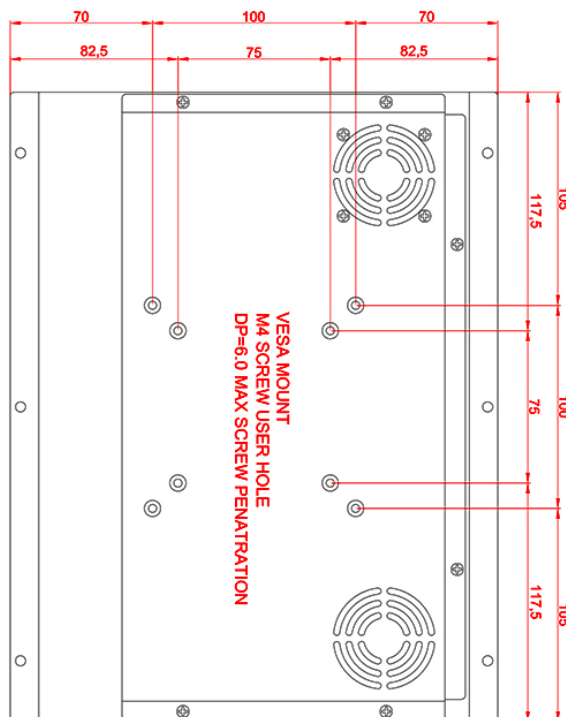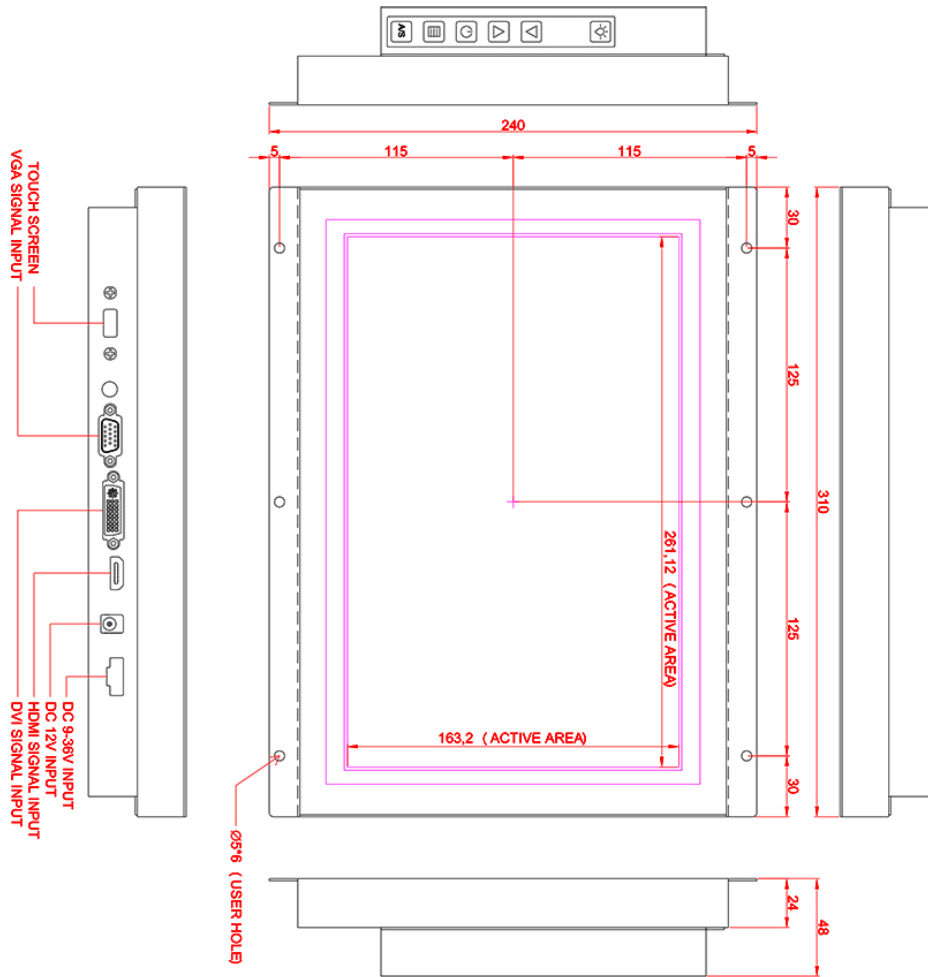

Note :
(1) Unit : mm
(2) Unspecified tolerances are +/- 0.5mm.