

Sunlight Readable Open Frame High Brightness LCD

Industrial Open Frame Metal Housing High Brightness

Wide 21.5" LCD 1920*1080 1500nits, LCD Surface Temp up to 110C 5000:1

89/89/89/89, Power Consumption 61.8W with VGA and DVI input.

Overall Operating temp is 110C High TNI , Operating temp is 20+65C Surface temp up

to 110C Operating Humidity 10-90%+5 Wires Resistive Touch with USB Controller



1500 nits

Model: YOPW2150WTHB2-TR

FEATURES:

- Sunlight Readable.
- 21.5" Full-HD TFT LCD with resolution up to 1920x1080.
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.

System Specifications



Brightness (cd/m ²)	1500
Display Resolution (pixel)	Full-HD(1920 x 1080)
Display Color	16.7M colors
Viewing Angles (CR≥10)	89/89/89/89
Contrast Ratio	5000 : 1
Response Time (msec)	5ms
Backlight Unit	LED
Temperature	
Operation	20°C~65°C
Storage	-20°C~60°C
Optional	Touch, Glass

Note: Fanless: Brightness < 1000 nits;
Add fan: Brightness ≥ 1000 nits.

Model: YOPW2150HB



MECHANICAL DRAWINGS:

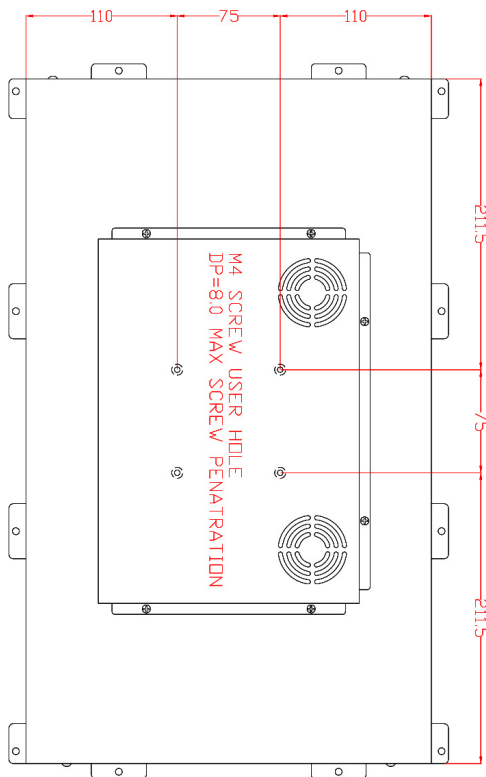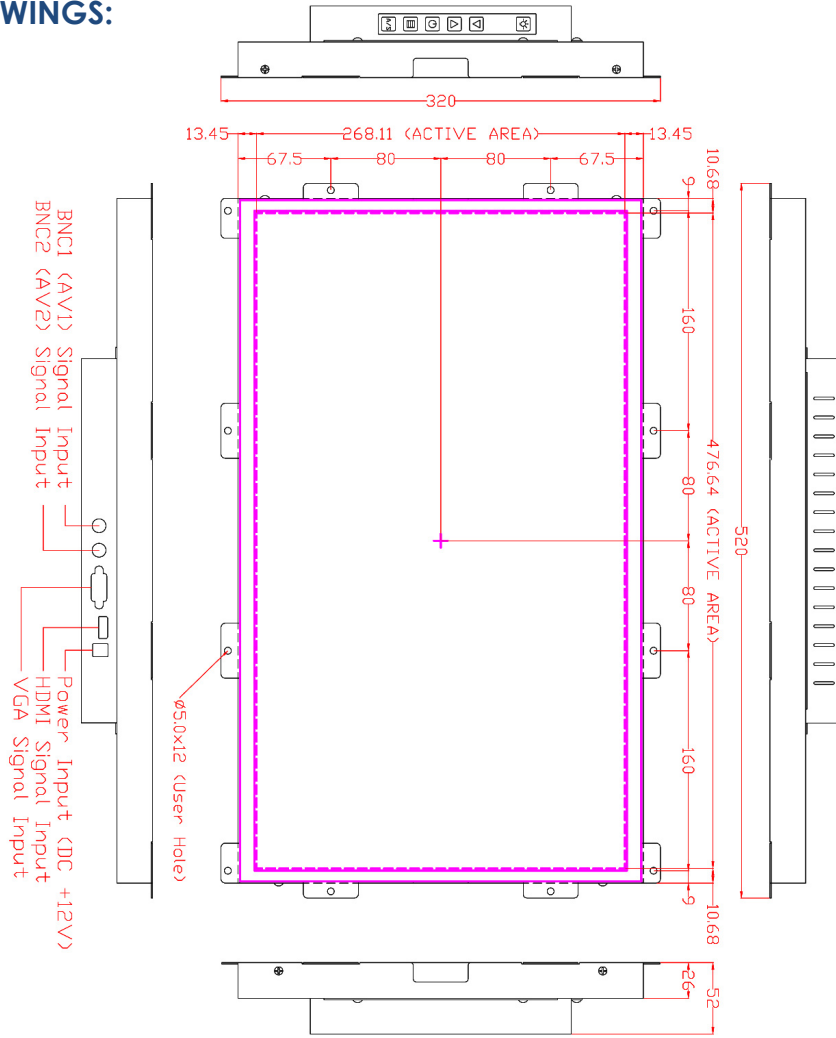

Note :
 (1) Unit : mm
 (2) Unspecified tolerances are ±0.5mm.