

Sunlight Readable Panel Mount High Brightness LCD

Panel Mount Metal Housing High Brightness Integrated IP65 Front Panel Al-5mm
 32" LCD 1920*1080, contrast 1000:1 with VGA input 1500nits LED Backlight Contrast Ratio 3000:110/220V AC, Operating Temp -4F to 140F (-20C to 60C/140F) Anti Shock 30G, Anti Vibration 1G (2-200Hz)

Model: YPMW3200PHB2WT



1500nits


FEATURES:

- High contrast Color TFT-LCD Monitor support resolution up to 1920 x 1080.
- Light Sensor at front bezel top middle
- VGA input
- Auto power and signal on/off
- Life time 60K hours, operating Time 24 hours/Per day (Moving Pictures)
- Panel Enhancement to prevent isotropic blackout under Direct Sun up to 110°C
- One(1) Year Return to Depot Warranty

SPECIFICATIONS:

Item	Specification
Panel Type	32.0-inch TFT LCD
Screen Diagonal	32.0-inch
Active Display Area (mm)	698.4 (H) x 392.85(V)
Pixel Pitch (um)	0.3637 (H) x 0.3637 (W)
Number of Pixels	1,920x1,080
Contrast Ratio	1000:1
Color Arrangement	R.G.B. Vertical Stripe
Brightness (cd/m ²)	1500 cd/m ²
Viewing Angle(Typ.)	89/89/89/89 (R/L/U/D)
Signal Connector	VGA + DVI + HDMI
Power Source	110/220V AC, Universal +/- 10%
Power Management	VESA DPMS Compliant
Operating Temperature	-20°C to 60°C
Plug & Play	VESA DDC 1/2B
Touch	PCAP Touch with USB Controller Dual touch for Window 7
Anti Shock	30G
Anti Vibration	1G (2-200Hz)

MECHANICAL DRAWINGS:

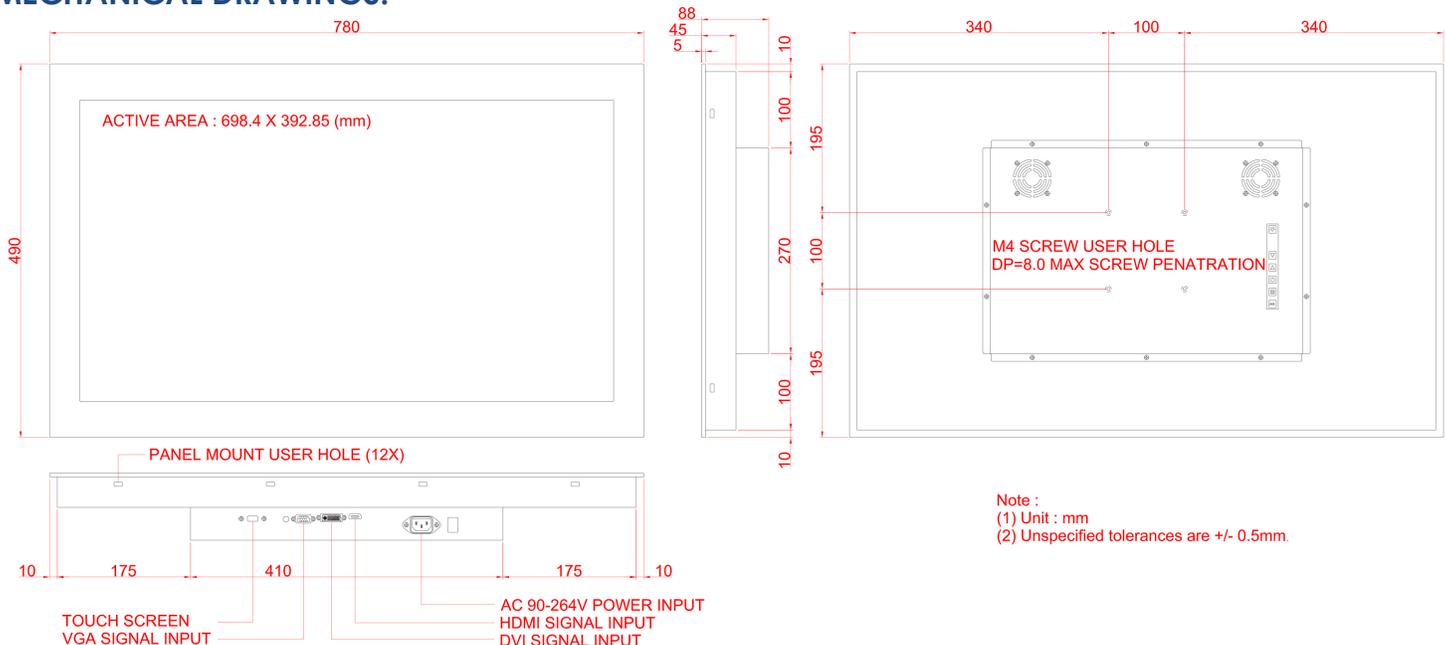

Note :
 (1) Unit : mm
 (2) Unspecified tolerances are +/- 0.5mm.