

DIGITAL SIGNAGE

MPEG Player



Model: CMP2000N
color: black



Overview

The CMP2000N video playback system offers digital signage capabilities in a compact network-capable package. Interface with new customers through dynamic signage or download online data - it's all possible with the CMP2000N. The CMP2000N Network MPEG playback system can store and load DVD quality audio and video (MPEG 1/2/4, MP3, JPEG) from compact flash cards up to 4GB, perfect for broadcasting solutions.

The CMP2000N online features make it the video playback system with the most flexibility and its quality manufacturing guarantees reliability for information kiosks, dynamic signage, and other video playback tasks

Features

- Various video codecs and card formats supported
- Multi-language support
- MP3 playback capability

Option

Vesa Mount Bracket


Specifications

Hardware

- ESS Chipset
- Video output / Audio output
- 12V
- On Board EEPROM memory

I/O

- VGA, S-Video, Composite Video
- Stereo phone jack
- USB1.1 port
- Compact Flash reader

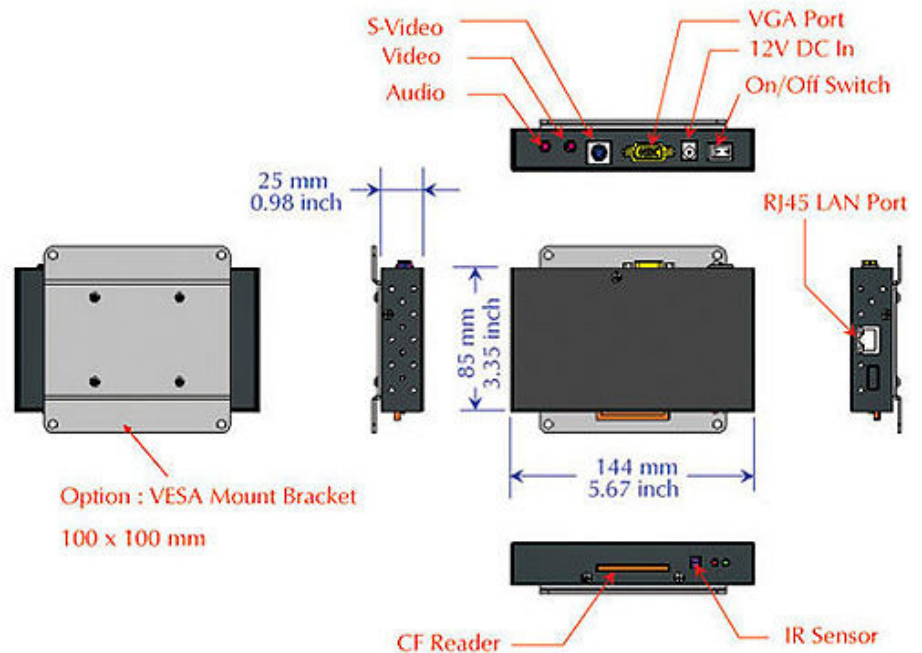

Mechanical and Environment

- Single Voltage +12/1A, w/ ACPI function support
- Operation temperature: 0~60oC (32~140oF)
- Humidity: 85% Maximum
- 144 x 85 x25 mm [5.67 x 3.35 x .098 inch] 365 [0.80 lbs]

Audio Support

2 channel audio DAC

Video Support

MPEG 1/2/4, MP3, JPEG, AVI

Data Rates			
Format	VCD	AVI/DivX	AVI/DivX
Resolution	352x240	720x480	640x480
NTSC/PAL	352x288	720x576	640x480
Video Compression	MPEG1	MPEG2	MPEG4
Video Bitrate	1150kbp	<5kbps	<5kbps

