

Just Feel it and Love it....

I-Star USA


D-Storm Series D-400 (4U)

Specifications

Model No.	D 400 Storm Series
5.25" Bay	4 x 5.25" (optional for 6x5.25")
3.5" Bay	1 x 3.5" 2x3.5" (internal)
M/B factor	12"(W)x13"(D) ATX M/B (for 4x5.25" version) 12"(W)x10"(D) ATX M/B (for 6x5.25" version)
Power LED Display	Yes!
Fail LED Display	Yes!
HDD LED Display	Yes!
Front connector:	USB 2.0 x 2 Connector at Front
Security :	Both Front Doors Are Lockable
Ventilation	1x12cm fan(for 4x5.25") ; 1x8cm fan in Rear side Optional 2x8cm Fan and bar
Material	Chassis-1.2mm SECC Zinc-Coated Steel (Japan Made) Door-Aluminum Alloy With Hard Anodized Treatment
Dimension	7"(H) x 19"(W) x 20.8"(D)
Weight	26 lbs.
Color	Black/Silver/Golden
I/O Ports	Standard ATX Port (Front USB Port) / 14slot BackPlane
Sliding Rail	24" or 26"
Optional	Detecting Board For System Environment Monitoring (Optional) TC-ISF08
Power Supply	PS2 Power Supply or I-Star Mini Redundant Power



Drawing

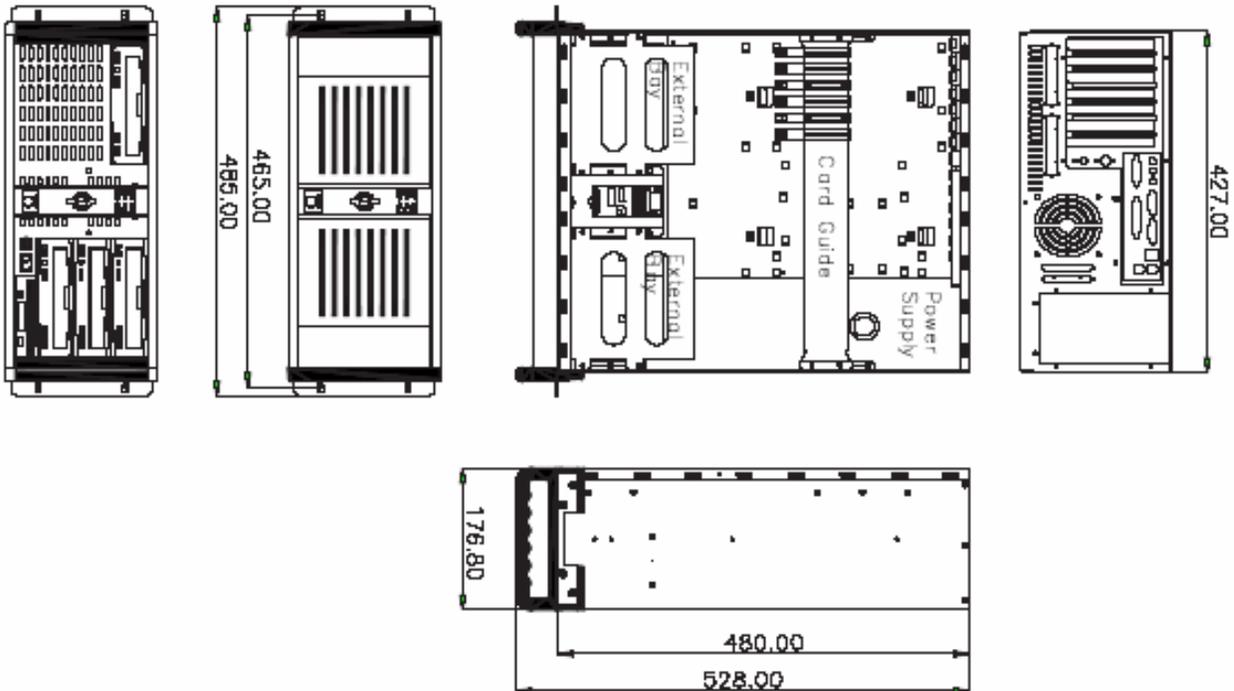

Just Feel it and Love it....

Power option

I-Star ATX Power Supply 350w-400w

I-Star Mini-Redundant Power Supply 300-500w

Photo

