

I-Star, Power up your future.....

Performance, Powerful, Professional

Features

MODEL NO: D-400L Storm Series

- *19" 4U High-End Rackmount Chassis compliant to EIA RS-310C Standard
- *Detachable card cage for easy installation and maintenance
- *System environmental monitor (optional)
- *Changeable Filter at front bezel
- *Dual lockable latch doors
- *Different Color Bezel: RED/Silver/Blue/Golden/Black or OEM your own Color on Bezel.
- *DVR Back-plate (optional)
- *FCC/CE industrial Class A approval


Specifications

- *Chassis : Meet EIA RS-310C 19" 4U high, Aluminum Bezel and handle Rackmount standard; heavy-duty steel. SECC 1.2t (Japan)
- *Drive Space: 7x5.25" 1x3.5" 1x3.5" (int.)
- *M/B size : 12x13 M/B
- *Front Panel: Power on/off, reset switch and USB 2.0; power and HDD active LED
- *Thermal Solution: 3x 120mm ; 1x 80mm Ball bearing cooling fans; system environmental monitor (optional) and changeable air filter.
- *Altitude: 15,000 feet
- *Power Supply : PS2 Power Mini Redundant Power
- *Temperature: 0~50C (operating);0~70C (Storage)
- *Humidity:5~95%; non-condensing
- *Safety Standard: FCC/CE on chassis and FCC/CE/UL/TUV on power supply.
- *Dimensions/Weight:19.0"w x 27.0"d x 7.0"h / 40lbs

Patent No.

- TW :200281 (for front panel structure)
- CM :ZL 01 2 59648.5
- TW :190240 (for long card holder)

Photo of Chassis

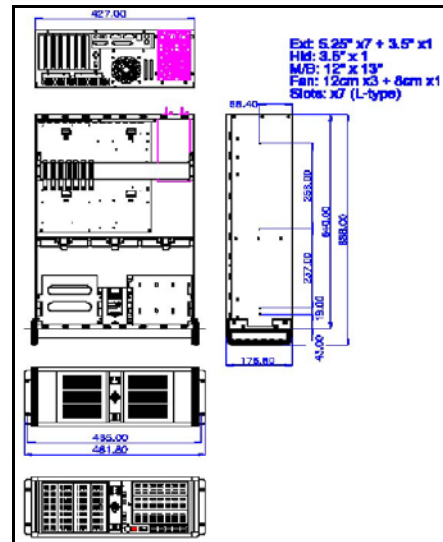

Ordering Guide

- *D-400-L Storm Series
- 19" 4U High , Full size Rackmount chassis (Black Color)
- *TC-xxxP-ATX (I-Star Single Switching Power)
- *TC-xxxR8 (I-Star Single AC Input Redundant Power)
- *TC-xxxR8A (I-Star Real Dual AC Input Redundant Power)
- *N-DVR28xxx (DVR Back-Plate)