



REV.	DATE	BY	DESCRIPTION
02	2013/02/19	Enson	Add Ferrit Core
03	2013/03/26	Angel	Change D-SUB To Without Waterproof
04	2013/03/28	Angel	Change D-SUB To Male Conn

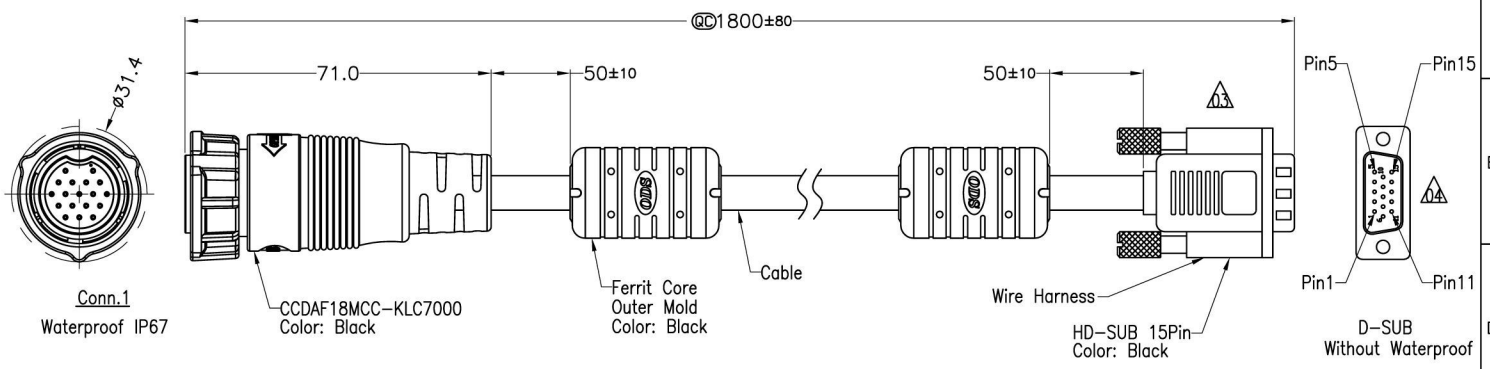

CUSTOMER APPROVED

SIGNATURE	
DATE	



10	Green (28AWG)	綠	10
3	Drain	地線	5
	Braid	編織	Shield
13	Yellow (28AWG)	黃	12
7	White (28AWG)	白	15
15	Brown (28AWG)	棕	14
14	Black (28AWG)	黑	13
6	Coax Blue	Blue 藍	3
9		Spiral 纏繞	8
5	Coax Green	Green 綠	2
1		Spiral 纏繞	7
4	Coax Red	Red 紅	1
8		Spiral 纏繞	6
Conn.1	Wire Color		Conn.2
	Pin Out		

Wire Harness  
搭接短路

Note:

- Waterproof Rate: IP67  
(No Ingress Of Dust/ Protected Against Harmful Effects Caused In 1 Meter Water Within 30 Minutes)
- Temperature Range: -20°C to +80°C
- Material:  
Connector 1: Nylon, Black  
Pin: Copper Alloy, Gold Plated  
Connector 2: HD-Sub 15Pin, Male
- Cable:  
UL20276 3COAX+28AWG\*5C+Drain+Al.Mylar+Braid,  
PVC Jacket, Black
- Wire Harness: UL1007, 28AWG, Black

**i-Tech Company LLC**

TITLE: CIRCULAR,LARGE,CABLE TO HD-SUB

QC : QC check    CpK : CpK check    PART NO: VES-18PIN-01

TOLERANCE	±0.50	SCALE	1 : 1	DWN	Angel	DATE	2013/03/28
UNIT:	mm	SIZE	A4	CHKD	Chen	DATE	2013/03/28
SHEET	1 of 1	REV.	04	APVR	Andy	DATE	2013/03/28

8-FM-07-02-10(A)